



 YC GROUP


ACHEM

OPP Tape Series



www.achem.com

ACHEM. wonder.

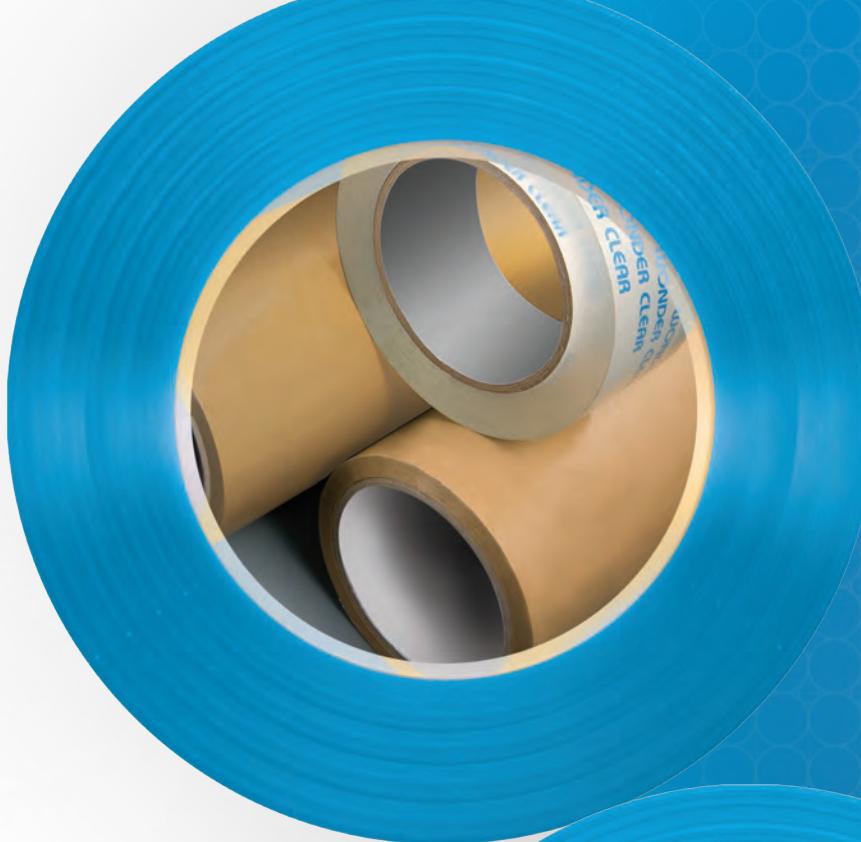

ACHEM. wonder.




Contents

OPP & Dispenser Series --- P6~P27



OPP & Dispenser Series



Stationery Tape
Page 20



Dispenser
Page 24



Packaging tape
Page 8



SOLVENT




EMULSION



HOT MELT



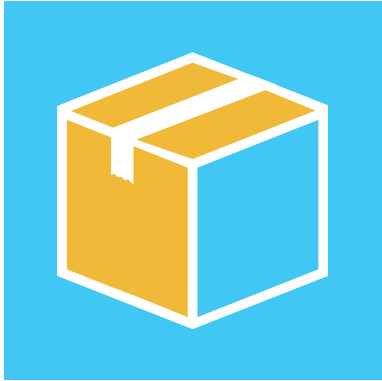

Packaging Tape



 General Use											
	Product No.	Thickness mm(mils)	Backing mm(mils)	Adhesion kg/cm(oz/in)	Holding Power (mins)	Elongation (%)	Tensile Strength kg/cm(lbs/in)	Color	Printing	RoHS	REACH
	12750	0.04(1.57)	0.025(0.98)	0.2(17.64)	1440	140	2.8(15.4)			⊙	⊙
	12730	0.043(1.69)	0.025(0.98)	0.24(21.16)	1440	140	2.8(15.4)			⊙	⊙
	12K00	0.045(1.77)	0.025(0.98)	0.24(21.16)	1440	140	2.8(15.4)	⊙		⊙	⊙
	12800	0.05(1.97)	0.028(1.1)	0.24(21.16)	1440	140	3.6(19.8)	⊙		⊙	⊙
	12200	0.054(2.13)	0.028(1.1)	0.26(22.93)	1440	140	3.6(19.8)	⊙	⊙	⊙	⊙
	12300	0.066(2.6)	0.04(1.57)	0.28(24.69)	1440	140	4.8(26.4)	⊙		⊙	⊙
	12G00	0.068(2.68)	0.04(1.57)	0.28(24.69)	1440	140	4.8(26.4)	⊙		⊙	⊙
	12400	0.089(3.5)	0.06(2.36)	0.32(28.22)	1440	140	6.7(36.85)		⊙	⊙	⊙

 Crystal Clear											
	Product No.	Thickness mm(mils)	Backing mm(mils)	Adhesion kg/cm(oz/in)	Holding Power (mins)	Elongation (%)	Tensile Strength kg/cm(lbs/in)	Color	Printing	RoHS	REACH
	X12KL	0.045(1.77)	0.025(0.98)	0.24(21.16)	1440	140	2.8(15.4)			⊙	⊙
	128L0	0.05(1.97)	0.028(1.1)	0.24(21.16)	1440	140	3.6(19.8)			⊙	⊙
	123U0	0.065(2.56)	0.04(1.57)	0.3(26.46)	1440	140	4.8(26.4)			⊙	⊙
	123S0	0.065(2.56)	0.04(1.57)	0.3(26.46)	1440	140	4.8(26.4)			⊙	⊙
	123L0	0.068(2.68)	0.04(1.57)	0.3(26.46)	1440	140	4.8(26.4)			⊙	⊙
	125L0	0.08(3.15)	0.05(1.97)	0.32(28.22)	1440	160	5.5(30.25)			⊙	⊙

★ The data provided herein are measurement only, and are not guaranteed.


 Low Temperature	 Product No.	 Thickness mm(mils)	 Backing mm(mils)	 Adhesion kg/cm(oz/in)	 Holding Power (mins)	 Elongation (%)	 Tensile Strength kg/cm(lbs/in)	 Color	 Printing	 RoHS	 REACH
	12270	0.054(2.13)	0.028(1.1)	0.4(35.27)	1440	140	3.6(19.8)			⊙	⊙
	12440	0.095(3.74)	0.06(2.36)	0.32(28.22)	1440	140	6.7(36.85)	⊙		⊙	⊙

 Low Noise	 Product No.	 Thickness mm(mils)	 Backing mm(mils)	 Adhesion kg/cm(oz/in)	 Holding Power (mins)	 Elongation (%)	 Tensile Strength kg/cm(lbs/in)	 Color	 Printing	 RoHS	 REACH
	122Y0	0.055(2.17)	0.028(1.1)	0.26-0.4 (26.45-35.27)	1440	140	3.6-6.7 (19.8-36.85)			⊙	⊙
	12360	0.065(2.56)	0.04(1.57)	0.3(26.46)	1440	140	4.8(26.4)	Clear&Brown		⊙	⊙

 Crystal Clear Plus Low Noise	 Product No.	 Thickness mm(mils)	 Backing mm(mils)	 Adhesion kg/cm(oz/in)	 Holding Power (mins)	 Elongation (%)	 Tensile Strength kg/cm(lbs/in)	 Color	 Printing	 RoHS	 REACH
	123U0	0.065(2.56)	0.04(1.57)	0.3(26.46)	1440	140	4.8(26.4)			⊙	⊙
	123S0	0.065(2.56)	0.04(1.57)	0.3(26.46)	1440	140	4.8(26.4)			⊙	⊙



★ The data provided herein are measurement only, and are not guaranteed.

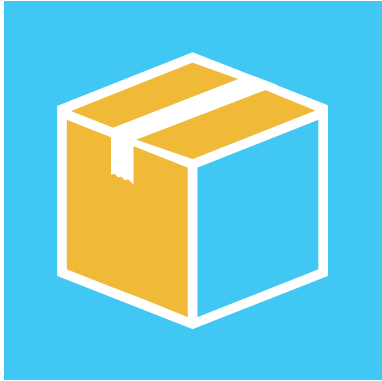

Packaging Tape




 General Use	 Product No.	 Thickness mm(mils)	 Backing mm(mils)	 Adhesion kg/cm(oz/in)	 Holding Power (mins)	 Elongation (%)	 Tensile Strength kg/cm(lbs/in)	 Color	 Printing	 RoHS	 REACH
	A2342	0.038(1.496)	0.025(0.984)	0.14(11.99)	1440	100~200	3.26(17.95)		☉	☉	☉
	A2N03	0.038(1.496)	0.025(0.984)	0.16(14.11)	1440	80~180	2.56(14.08)	☉	☉	☉	☉
	A2362	0.04(1.575)	0.025(0.984)	0.16(14.11)	1440	100~200	3.26(17.95)		☉	☉	☉
	A21B2	0.04(1.575)	0.023(0.906)	0.17(14.82)	1440	100~200	2.4(13.2)		☉	☉	☉
	A2093	0.04(1.575)	0.023(0.906)	0.2(17.64)	1440	80~180	2.24(12.32)	☉	☉	☉	☉
	A2J03	0.04(1.575)	0.025(0.984)	0.16(14.11)	1440	80~180	2.56(14.08)	☉	☉	☉	☉
	A2913	0.043(1.693)	0.025(0.984)	0.2(17.64)	1440	80~180	2.56(14.08)	☉	☉	☉	☉
	A23B2	0.045(1.772)	0.025(0.984)	0.18(16.23)	1440	100~200	3.26(17.95)		☉	☉	☉
	A2K03	0.045(1.772)	0.025(0.984)	0.2(17.64)	1440	80~180	2.56(14.08)	☉	☉	☉	☉
	A25D2	0.05(1.969)	0.028(1.102)	0.2(17.64)	1440	100~200	3.57(19.62)		☉	☉	☉
	A2803	0.05(1.969)	0.028(1.102)	0.2(17.64)	1440	80~180	3.04(16.72)	☉	☉	☉	☉
	A2203	0.054(2.126)	0.028(1.102)	0.2(17.64)	1440	80~180	3.04(16.72)	☉	☉	☉	☉
	A25J2	0.055(2.165)	0.028(1.102)	0.22(19.4)	1440	100~200	3.57(19.62)		☉	☉	☉
	A27A2	0.065(2.559)	0.04(1.575)	0.25(21.87)	1440	100~200	4.49(24.68)		☉	☉	☉
	A2313	0.065(2.559)	0.035(1.378)	0.24(21.16)	1440	80~220	4(22)	☉	☉	☉	☉
	A2992	0.09(3.543)	0.06(2.362)	0.28(24.69)	1440	100~200	6.32(34.76)		☉	☉	☉
	A2413	0.09(3.543)	0.06(2.362)	0.24(21.16)	1440	80~220	6.32(34.76)	☉	☉	☉	☉

★ The data provided herein are measurement only, and are not guaranteed.
★ The thickness allowance is +/- 0.004mm. The backing allowance is +/- 0.002mm.


 Crystal Clear	 Product No.	 Thickness mm(mils)	 Backing mm(mils)	 Adhesion kg/cm(oz/in)	 Holding Power (mins)	 Elongation (%)	 Tensile Strength kg/cm(lbs/in)	 Color	 Printing	 RoHS	 REACH
	S2022	0.04(1.575)	0.025(0.984)	0.14(12.35)	1440	100~200	3.26(17.95)			⊙	⊙
	S2052	0.045(1.772)	0.025(0.984)	0.18(16.23)	1440	100~200	3.26(17.95)			⊙	⊙
	A26W3	0.047(1.85)	0.028(1.102)	0.2(17.64)	1440	80~180	3.04(16.72)			⊙	⊙
	A2W23	0.049(1.929)	0.028(1.102)	0.2(17.64)	1440	80~180	3.04(16.72)			⊙	⊙
	S20A2	0.05(1.969)	0.025(0.984)	0.2(17.64)	1440	100~200	3.26(17.95)			⊙	⊙
	A2W33	0.058(2.283)	0.03(1.181)	0.24(21.16)	1440	80~180	3.2(17.6)			⊙	⊙
	S20C2	0.065(2.559)	0.04(1.575)	0.25(21.87)	1440	100~200	4.49(24.68)			⊙	⊙
	A2W43	0.068(2.677)	0.04(1.575)	0.24(21.16)	1440	80~220	4.8(26.40)			⊙	⊙



★ The data provided herein are measurement only, and are not guaranteed.
★ The thickness allowance is +/- 0.004mm. The backing allowance is +/- 0.002mm.

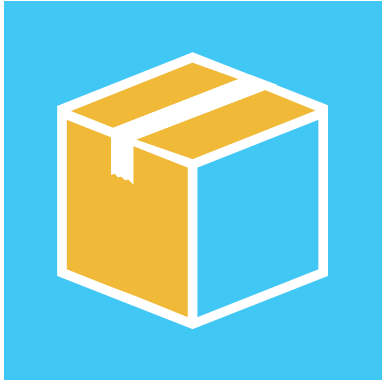

Packaging Tape



 Premium Grade Crystal Clear	 Product No.	 Thickness mm(mils)	 Backing mm(mils)	 Adhesion kg/cm(oz/in)	 Holding Power (mins)	 Elongation (%)	 Tensile Strength kg/cm(lbs/in)	 Application Temperature°C(°F)	 Service Temperature°C(°F)	 RoHS	 REACH	 Remark
	XH23M	0.06(2.36)	0.04(1.57)	0.4(35.27)	15000↑	165	4.8(26.4)	0°C~40°C 32°F~104°F	-10°C~50°C 14°F~122°F	⊙	⊙	• Low Odor • Low VOC
	XH24M	0.08(3.15)	0.06(2.36)	0.4(35.27)	15000↑	210	6.8(37.4)	0°C~40°C 32°F~104°F	-10°C~50°C 14°F~122°F	⊙	⊙	• Low Odor • Low VOC
 Premium Grade	 Product No.	 Thickness mm(mils)	 Backing mm(mils)	 Adhesion kg/cm(oz/in)	 Holding Power (mins)	 Elongation (%)	 Tensile Strength kg/cm(lbs/in)	 Application Temperature°C(°F)	 Service Temperature°C(°F)	 RoHS	 REACH	 Remark
	H2770	0.04(1.57)	0.025(0.98)	0.36(31.75)	10000↑	140	2.8(15.4)	0°C~40°C 32°F~104°F	-10°C~50°C 14°F~122°F	⊙	⊙	-
	H2880	0.043(1.69)	0.028(1.1)	0.36(31.75)	10000↑	140	3.6(19.8)	0°C~40°C 32°F~104°F	-10°C~50°C 14°F~122°F	⊙	⊙	-
	XH28D	0.045(1.77)	0.028(1.1)	0.4(35.27)	10000↑	140	3.6(19.8)	0°C~40°C 32°F~104°F	-10°C~50°C 14°F~122°F	⊙	⊙	-
	H2870	0.048(1.89)	0.028(1.1)	0.4(35.27)	15000↑	140	3.6(19.8)	0°C~40°C 32°F~104°F	-10°C~50°C 14°F~122°F	⊙	⊙	-
	H2310	0.06(2.36)	0.04(1.57)	0.4(35.27)	15000↑	140	4.8(26.4)	0°C~40°C 32°F~104°F	-10°C~50°C 14°F~122°F	⊙	⊙	-
 Superior Grade	 Product No.	 Thickness mm(mils)	 Backing mm(mils)	 Adhesion kg/cm(oz/in)	 Holding Power (mins)	 Elongation (%)	 Tensile Strength kg/cm(lbs/in)	 Application Temperature°C(°F)	 Service Temperature°C(°F)	 RoHS	 REACH	 Remark
	H2D10	0.032(1.26)	0.02(0.79)	0.36(31.75)	6000↑	140	2.6(14.3)	7°C~40°C 45°F~104°F	0°C~50°C 32°F~122°F	⊙	⊙	-


★ The data provided herein are measurement only,and are not guaranteed.

 Superior Grade	 Product No.	 Thickness mm(mils)	 Backing mm(mils)	 Adhesion kg/cm(oz/in)	 Holding Power (mins)	 Elongation (%)	 Tensile Strength kg/cm(lbs/in)	 Application Temperature°C(°F)	 Service Temperature°C(°F)	 RoHS	 REACH
	H2F10	0.035(1.38)	0.022(0.87)	0.36(31.75)	6000↑	140	2.8(15.4)	5°C~40°C 41°F~104°F	-5°C~50°C 23°F~122°F	⊙	⊙
	H2790	0.038(1.5)	0.025(0.98)	0.36(31.75)	6000↑	140	2.8(15.4)	5°C~40°C 41°F~104°F	-5°C~50°C 23°F~122°F	⊙	⊙
	H27B0	0.04(1.57)	0.025(0.98)	0.36(31.75)	6000↑	140	2.8(15.4)	7°C~40°C 45°F~104°F	0°C~50°C 32°F~122°F	⊙	⊙
	H28A0	0.043(1.69)	0.028(1.1)	0.36(31.75)	6000↑	140	3.6(19.8)	7°C~40°C 45°F~104°F	0°C~50°C 32°F~122°F	⊙	⊙
	H2890	0.045(1.77)	0.028(1.1)	0.4(35.27)	10000↑	140	3.6(19.8)	5°C~40°C 41°F~104°F	-5°C~50°C 23°F~122°F	⊙	⊙
	H28F0	0.045(1.77)	0.028(1.1)	0.4(35.27)	6000↑	140	3.6(19.8)	7°C~40°C 45°F~104°F	0°C~50°C 32°F~122°F	⊙	⊙
	H2500	0.07(2.76)	0.05(1.97)	0.4(35.27)	8000↑	180	5.2(28.6)	7°C~40°C 45°F~104°F	0°C~50°C 32°F~122°F	⊙	⊙


 Low Temperature	 Product No.	 Thickness mm(mils)	 Backing mm(mils)	 Adhesion kg/cm(oz/in)	 Holding Power (mins)	 Elongation (%)	 Tensile Strength kg/cm(lbs/in)	 Application Temperature°C(°F)	 Service Temperature°C(°F)	 RoHS	 REACH
	XH28J	0.048(1.89)	0.028(1.1)	0.4(35.27)	10000↑	140	3.6(19.8)	-5°C~40°C 23°F~104°F	-15°C~50°C 5°F~122°F	⊙	⊙
	XH235	0.06(2.36)	0.04(1.57)	0.4(35.27)	10000↑	165	4.8(26.4)	-5°C~40°C 23°F~104°F	-15°C~50°C 5°F~122°F	⊙	⊙

 Printable	 Product No.	 Thickness mm(mils)	 Backing mm(mils)	 Adhesion kg/cm(oz/in)	 Holding Power (mins)	 Elongation (%)	 Tensile Strength kg/cm(lbs/in)	 Application Temperature°C(°F)	 Service Temperature°C(°F)	 RoHS	 REACH
	XH28B	0.043(1.69)	0.028(1.1)	0.36(31.75)	6000↑	140	3.6(19.8)	5°C~40°C 41°F~104°F	-10°C~50°C 14°F~122°F	⊙	⊙
	XH211	0.048(1.89)	0.03(1.18)	0.4(35.27)	10000↑	140	3.6(19.8)	5°C~40°C 41°F~104°F	-10°C~50°C 14°F~122°F	⊙	⊙

★ The data provided herein are measurement only, and are not guaranteed.

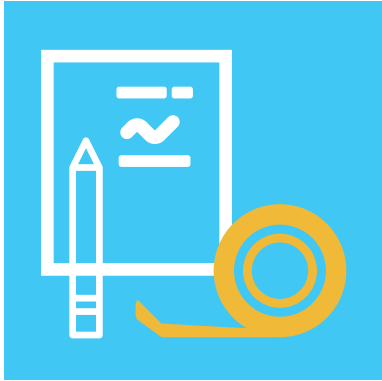

Stationery Tape

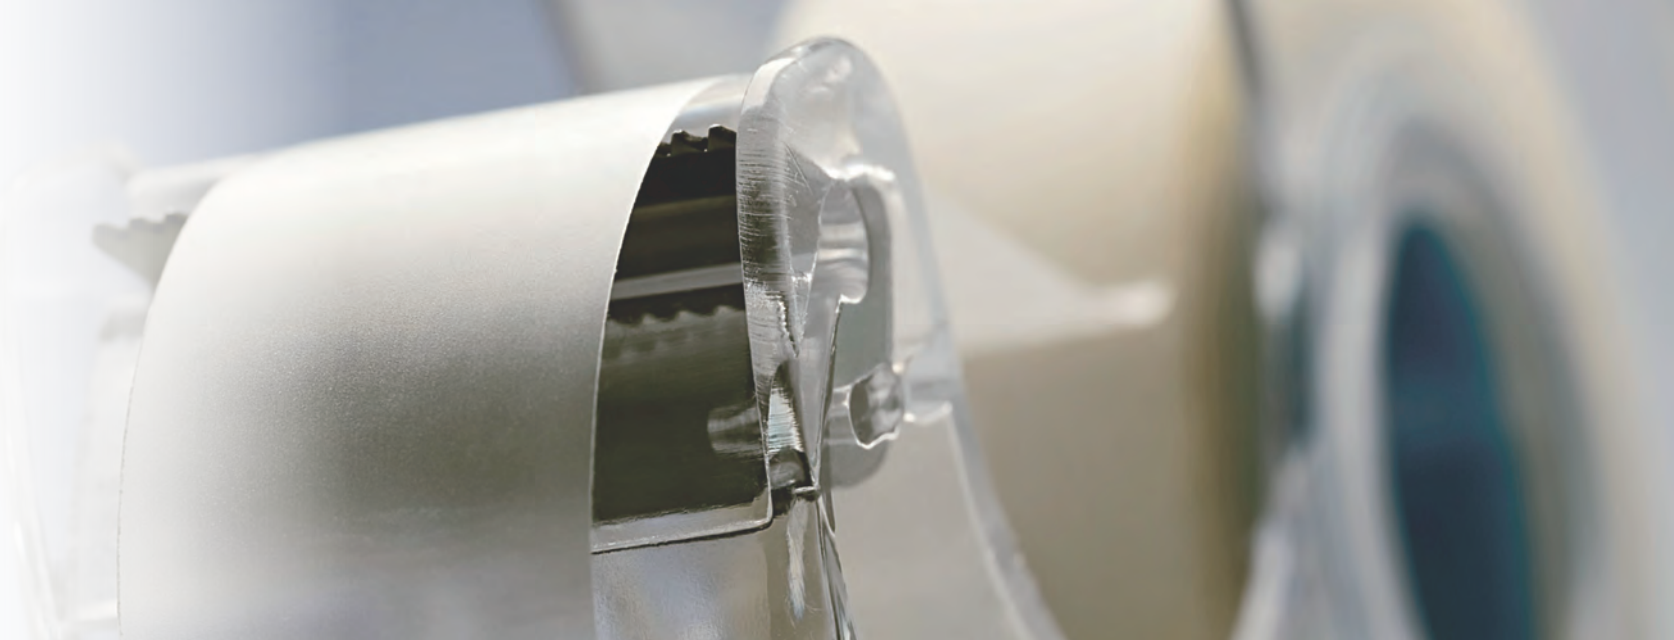

 General Use												
	Product No.	Thickness mm(mils)	Backing mm(mils)	Adhesion kg/cm(oz/in)	Elongation (%)	Tensile Strength kg/cm(lbs/in)	Crystal Clear	Color	Easy Tear	Photocopy	RoHS	Remark
	A2N03	0.38(1.5)	0.025(0.98)	0.136(11.99)	80~220	2.56(14.08)		◎			◎	-
	C2362	0.04(1.57)	0.025(0.98)	0.16(14.11)	≤110	1.4~3.2(7.7~17.6)			◎		◎	-
	32532	0.04(1.57)	0.028(1.1)	0.13(11.29)	10~30	2.04(11.22)			◎		◎	-
	A25W3	0.04(1.57)	0.028(1.1)	0.136(11.99)	80~220	3(16.5)	◎	◎			◎	-
	C2062	0.045(1.77)	0.025(0.98)	0.18(16.23)	≤110	1.4~3.2(7.7~17.6)			◎		◎	-
	C20A2	0.045(1.77)	0.025(0.98)	0.18(16.23)	≤110	1.4~3.2(7.7~17.6)			◎		◎	-
	C23B2	0.045(1.77)	0.025(0.98)	0.18(16.23)	≤110	1.4~3.2(7.7~17.6)			◎		◎	-
	323B2	0.045(1.77)	0.025(0.98)	0.18(16.23)	10~30	2.04(11.22)			◎		◎	-
	328M0	0.046(1.81)	0.028(1.1)	0.22(19.4)	140	3.6(19.8)	◎	Light Yellow			◎	• Low Noise
	A2W23	0.049(1.93)	0.028(1.1)	0.2(17.64)	80~220	3(16.5)	◎	◎			◎	-
	C2082	0.05(1.97)	0.025(0.98)	0.2(17.64)	≤110	1.4~3.2(7.7~17.6)			◎		◎	-
	325D2	0.05(1.97)	0.028(1.1)	0.2(17.64)	10~30	2.04(11.22)			◎		◎	-
	32383	0.05(1.97)	0.03(1.18)	0.136(11.99)	50~150	3.2(17.6)		◎			◎	• Matte BOPP

★ The data provided herein are measurement only, and are not guaranteed.
★ The thickness allowance is +/- 0.004mm. The backing allowance is +/- 0.002mm.
★ The adhesive of item listed above are emulsion acrylic, except that "328M0" applies solvent acrylic.

 Writables	 Product No.	 Thickness mm(mils)	 Backing mm(mils)	 Adhesion kg/cm(oz/in)	 Elongation (%)	 Tensile Strength kg/cm(lbs/in)	 Crystal Clear	 Color	 Easy Tear	 Photocopy	 RoHS	 Remark
	S25A2	0.045(1.77)	0.025(0.98)	0.18(16.23)	100~200	3.26(17.95)					⊙	• Matte BOPP • Low unwinding force • Invisible tape
	S25E2	0.05(1.97)	0.025(0.98)	0.2(17.64)	100~200	3.26(17.95)					⊙	• Matte BOPP • Low unwinding force • Invisible tape
	3A103	0.058(2.28)	0.039(1.54)	0.18~0.24(15.87~21.16)	≥20	2(11)			⊙	⊙	⊙	• Acetate • Holding power:≥1000mins
	3A003	0.058(2.28)	0.039(1.54)	0.15~0.24(13.23~21.16)	≥20	2(11)			⊙	⊙	⊙	• Acetate • Low noise • Holding power:≥1000mins
	33003	0.095(3.74)	0.07(2.76)	0.12(10.58)	≥5	2(11)		Lemon Yellow (Opaque)	⊙			• Washi • Repetitive Stick



★ The data provided herein are measurement only, and are not guaranteed.
★ The thickness allowance is +/- 0.004mm. The backing allowance is +/- 0.002mm.
★ The adhesive of item listed above are emulsion acrylic, except that "328M0" applies solvent acrylic.



Dispenser

Product Name	Description
SL-206	2"width, 3"core, which can print the private logo
SL-207EZ	2"width, 3"core, which can print the private logo and it has the anti-drop advantages
SL-209	2"width, 3"core, which can print the private logo
SL-213	2"width, 3"core, which can print the private logo

Product Name	Description
SL-326	3"width, 3"core, which can print the private logo
SL-1038	2"width, 3"core, which can print the private logo and it has the elastic blade
SL-3398	3"width, 3"core, which can print the private logo and it has the elastic blade
SL-210	2"width, 3"core, the hand-held is skid resistance

SL-206



SL-207EZ



SL-326



SL-1038



SL-209



SL-213




SL-3398



SL-210



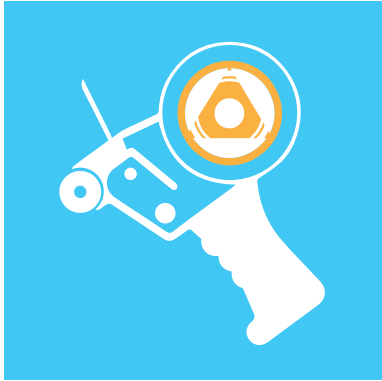


Dispenser


Product Name	Description
SL-821A	2"width, 1.5"core, it's very simplified and convenient
SL-600M	6"width, 3"core, it can apply to the long meters product
SL-7605K	0.5"width, 3"core, which can print the private logo
SL-9518	18"width, 3"core

Product Name	Description
SL-7326	desk top tape dispenser, 1"width with 2pcs combination, 2"core, it can print the private logo
SL-7336	desk top tape dispenser, 1"width with 3pcs combination, 3"core, it can print the private logo
SL-115	desk top tape dispenser, width 19mm, 1"core
SL-135	desk top tape dispenser, width 19mm, 1"core

SL-821A

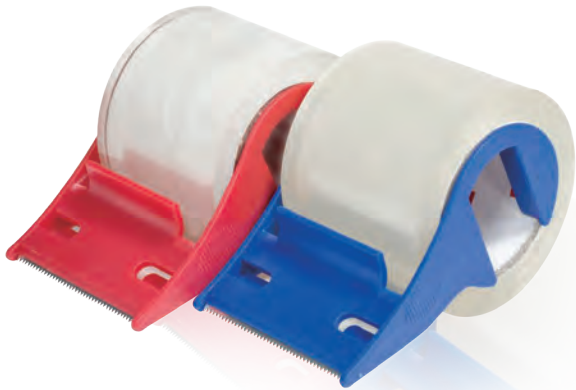


SL-600M

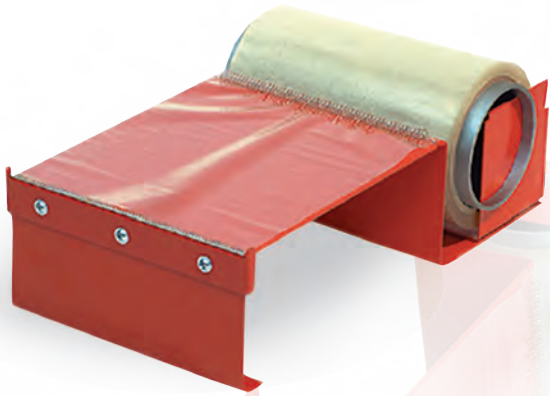

SL-7326



SL-7336

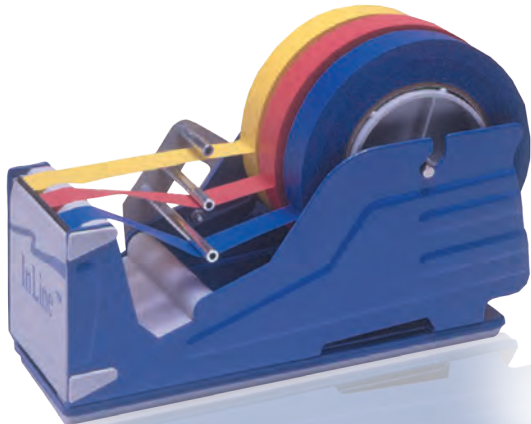

SL-7605K



SL-9518



SL-115



SL-135

