



2025 SPRING CATALOGUE PORTABLE AIR CONDITIONER

中山联昌电器有限公司

广东省中山市五桂山长逸路23号长命水工业区B区厂房528458
Factory B, Changmingshui Industrial Park, No.23,
Changyi Road, Wuguishan, Zhongshan City,
Guangdong, China(postcode528458)

Celsius Electric Industrial Corp.

14F, No. 31. Min Chuan Rd., Shin Tien Area.
New Taipei City, Taiwan
Website: www.celsiusair.com



2021.Oct:A New Leap in Business:

Zhongshan Lianchang starts a new page in business. We build and move to a new Manufacturing Site!

Zhongshan Lianchang Industrial Park combines component sites, assembly factory and ware houses together. The compact supply network could strengthen horizontal and vertical communication, enlarging the producing efficiency.

We've set some great milestones in the past 20 years, and we look forward to achieve a better success in the future.

Zhongshan LianChang Co.,Ltd.

Experienced Manufacturer in Portable Home Appliance

Product Line: Portable Air Conditioner, Dehumidifier, Air Purifier

Zhongshan LianChang, one of the professional Taiwan ODM/OEM manufacturers in China. Our experienced R&D team from Japan and Taiwan home appliance industry build us an "AirMaster", specialize in Portable Air Conditioners, Dehumidifiers and Air Purifiers. We are keen to create SMART compound products satisfying users' multi-needs. We want to follow users' lifestyle, simplifying complex operating procedures in life.

Zhongshan LianChang believes in the balance and fairness of creatures on earth. Thus, we utilize the reuse and recycle of Air and Water resource in pursuit of the sustainable developments in business and environment.

ODM/ OEM Up-to-Date products

To align with customers' growing needs, we dedicate ourselves to investigating environment, product legislation and culture of various countries. Now we successfully expand our business around the world. We commit to providing right products to the right place.

Dynamic Innovation Capability

The core competitive advantage of Zhongshan LianChang is the innovating capability. Our R&D department developed reliable products each year, therefore, we've owned over 30 patents in China ranging from invention, utility and design.

Multinational Certified & Approved

Certified by over 50 countries, we promise to provide safe and approved products without lengthy applying and inspecting process.

Certificate:

CB/CE/GS/PCT/cETLus/CCC/BSMI/SASO-ICCP ; Energy Star/ ROHS/ WEEE



Directory

- 05 Camping/Tent Air Conditioner PC10-CMA/CMB
- 07 Portable air conditioner PC-MMA
- 09 Portable air conditioner PC-SMA/SMB
- 11 Portable air conditioner PC-RMA
- 13 Portable air conditioner PC-PMA/PMC
- 15 Portable air conditioner PC-QMA
- 17 Portable air conditioner PC-AMA
- 19 Portable air conditioner PC-AMB
- 21 Portable air conditioner PC-AMD
- 23 Portable air conditioner PC-AME
- 25 Portable air conditioner PC-AMF
- 27 Portable air conditioner PC-AMH
- 29 Portable air conditioner PC-AMK
- 31 Portable air conditioner PC-KMG
- 33 Portable air conditioner PC-BMA/BMD/BM1D
- 35 Portable air conditioner PC-BMF/BMG
- 37 Portable air conditioner PC-DM1H/PCX-DM1H (Hoseless)
- 39 Portable air conditioner PC-DM2A/PCX-DM2A(Hoseless)
- 41 Portable air conditioner PC-DMF/DMB/DMG/PCX-DMF/DMB/DMG (Hoseless)
- 43 Portable air conditioner PC-DM1D/PCX-DM1D(Hoseless)
- 45 Portable air conditioner PC-LMA/LMB/PCX-LMA/LMB(Hoseless)
- 47 Portable air conditioner PC-12MA/PCX-12MA(Hoseless)
- 49 Portable air conditioner PC-02MA
- 51 Portable air conditioner PC-FMA
- 53 Portable air conditioner PC-01MA/06MI
- 55 Portable air conditioner PC-SMD
- 57 Portable air conditioner PC-MMR
- 59 Portable air conditioner PC-MMS
- 61 Portable air conditioner PC-MMU
- 63 Portable air conditioner LC65R-01AE
- 65 PAC Accessories | Window Kits




5 Reasons to Have Portable AC

- Simplest installation, just plug to use
- Movable unit, can share to use among rooms
- Open-space operation, use without closing door
- Self-Evaporation without draining or leaking
- Waterproof design (PX), outdoor using available

Our Unique Features

- Built-In Duct: Easy to store, Save space, Better looking
- Exchangeable air outlets: Efficiently use the cold and hot air in multi-ways
- Waterproof design(IPX): Durable water and dust proof cases and mechanism

Multi-Application AC

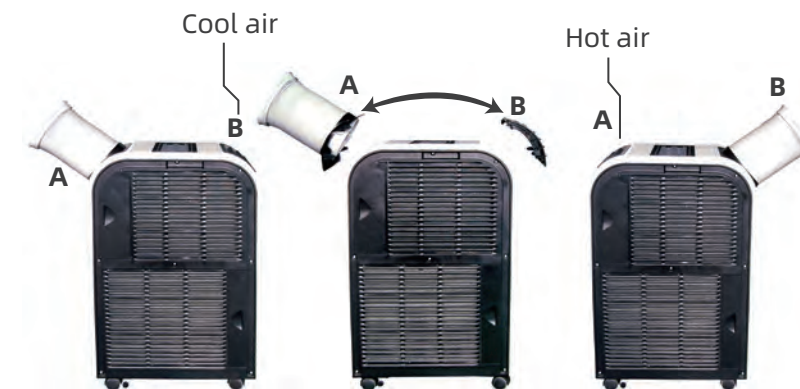


1 Exchangeable air outlets:Vent & Hose

2 Special air duct design

3 Water/Dust proof case

Our 3in1 Series has special exchangeable air outlets, users can use either cold or hot air by exchanging the air vent and exhaust hose. Moreover, the IPX water/dust proof case enable users putting unit outdoor and lead the cold air into ambience through the hose. The portable ac changes to be a outdoor unit, saving space and lowering noise for users!

Convenient accessory: Adapt the D type window kit on wall, users can control through panel or the remote controller.

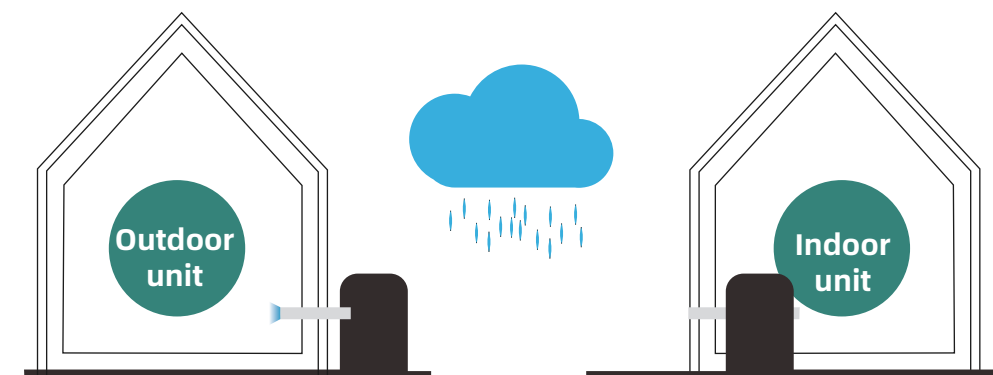



- ❶ Hot air outlet pipe
- ❷ Hot air inlet pipe
- ❸ Dual hoses'adaptor on hot side



- ❶ Dual hoses adaptor on cold side(Optional)
- ❷ Air Filter(Cold Air inlet)
- ❸ Cold air outlet
- ❹ Automatic swinging blades
- ❺ Luxury touch-control and white LED display
- ❻ Strong handle
- ❼ Movable rear adaptor



Model	PC10R-CMA/CMB	PC10-CMA/CMB	PCI9R-CMA/CMB (Inverter)	PCI12R-CMA/CMB (Inverter)
Power source	220-240V/50Hz	110-120V/60Hz	DC24V+Adaptor 110-240V/50-60Hz	DC48V+Adaptor 110-240V/50-60Hz
Cooling capacity(w)	1000	1000	900	1200
Cooling capacity (BTU)	3400	3400	3000	4000
Cooling Rated Power (W)	416	416	310	476
Air volume (m³/h)	150	150	190	190
EER	2.6	/	2.4	2.4
Model	Cooling,fan,swing	Cooling,fan,swing	Cooling,fan,swing	Cooling,fan,swing
Refrigerant	R290	R134a	R290	R290
Noise (dBA)	42-46	42-46	38-46	38-46
Unit dimensions (mm)	W302 xD540 xH345	W302xD540xH345	W302xD540xH345	W302xD540xH345
Packing dimensions (mm)	W331xD792xH382	W331xD792xH382	W331xD792xH382	W331xD792xH382
Container Loading (20'FT/40'GP/40'HQ)pcs	292/607/630	292/607/630	292/607/630	292/607/630
Net weight (kg)	14	14	8+1.5(Adaptor)	9+1.5(Adaptor)
Gross weight (kg)	16	16	11.5	12.5

● CMB model without swing function

Portable air conditioner PC-MMA




- *Max. Cooling Capacity: 24,000 BTU/H
- *Dual Display: Touch Pad on top with LED display (7-segment) and additional display in the front
- *Auto-Swing available(VERTICAL blades)
- *Cooling, (Heating), Dehumidifying, Ventilating
- *Powerful dehumidify capacity:90~120L/Day
- *3-Step Fan Speed: High-Middle-Low
- *User-Friendly Program: Auto/ Lock/ Sleep
- *24Hour Timer: Auto-On / Auto-Off
- *Self-Evaporating: No Draining and No Dripping
- *Similar design in metal case: PC-MMR

Close look



Hose Connector: Connect Two Hoses for spot cooling

Standard features

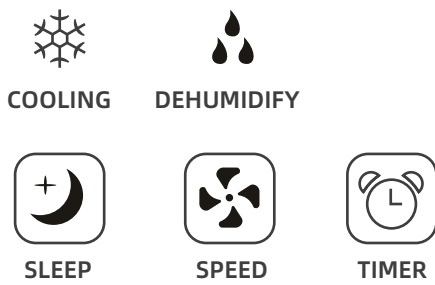

Optional features



Model	PC53R-MMA	PC65R-MMA	PC70-MMA*	PC60R-MMA A+++
Cooling Capacity (BTU)	18000	22000	24000	20000
Cooling Capacity (W)	5300	6500	7000	6000
Cooling power consumption(W)	2030	2500	2690	1580
Heating Capacity (BTU)optional	18000	22000	24000	/
Heating Capacity (W)optional	5300	6500	7000	/
Heating power consumption(W)	1830	2300	2490	/
Air volume(m3/h)	950	950	1150	1150
Dehumidification (30°C, RH80%) (L/Day)	90L/Day	120L/Day	150L/Day	120L/Day
EER	2.6	2.6	2.5	4.1
Refrigerant Type	R290	R290	R410a	R290
Noise (dBA)	65	65	65	65
Unit Dimensions (mm)	W540*D695*H1140	W540*D695*H1140	W540*D695*H1140	W540*D695*H1140
Packing Dimensions (mm)	W590*D775*H1290	W590*D775*H1290	W590*D775*H1290	W590*D775*H1290
Container Loading (20'FT/40'GP/40'HQ)pcs	27/60/120	27/60/120	27/60/120	27/60/120
Net Weight (kg)	51	52	54	52
Gross Weight (kg)	57	58	60	58

*Optional Heating function: add a 4-way valve

Portable air conditioner PC-SMA/SMB



- *Max. Cooling Capacity: 15,000 BTU/H
- *Surrounding air outlet, send the breeze all around the ambient without blocking
- *Cooling, (Heating), Dehumidifying, Ventilating
- *Flexible Temperature Setting (°C or °F available)
- *Touch Pad with LED display (7 segment)
- *Two powerful motors lead the ambient airflow
- *3-Step Fan Speed: High-Middle-Low
- *24Hour Timer: Auto-On / Auto-Off
- *Self-Evaporating No Draining, No Dripping
- *Powerful dehumidify capacity: 50L~65L/Day
- *Special exhaust hose packaging design in unit
- *Could Adapt to Accessory "Window Kits "
- *Double tube mode can be the overall (optional)

Close look



LED Touch Pad



Handles(Middle)



Swing(Vertical)




Two Filters




All-Around Air Outlet (U-Shaped)

Standard features

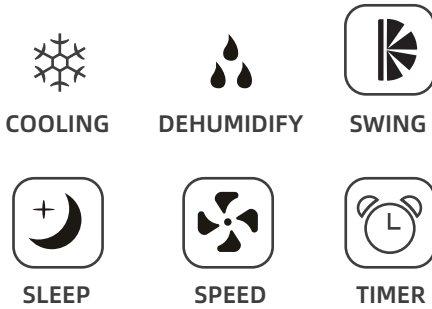

Optional features

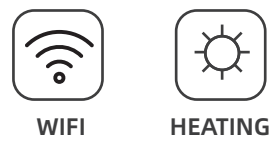

Double tube mode can be the overall cooling .Indoor air is not exchanged with the outside air. It is the inner loop and can achieve the overall cooling effect.

Model	PC35R-SMA/SMB	PC40R-SMA/SMB	PC44R-SMA/SMB
Cooling Capacity (BTU)	12000	14000	15000
Cooling Capacity (W)	3500	4000	4400
Cooling power consupction(W)	1345	1535	1690
Heating Capacity (BTU)optional	12000	14000	15000
Heating Capacity (W)optional	3500	4000	4400
Dehumidification (30°C, RH80%) (L/Day)	60L	70L	75L
Air volume(m3/h)	450	450	450
EER	2.6	2.6	2.6
Refrigerant	R290/R410a	R290/R410a	R290/R410a
Noise (dBA)	65	65	65
Unit Dimensions (mm)	W360*D578*H782	W360*D578*H782	W360*D578*H782
Packing Dimensions (mm)	W413*D608*H874	W413*D608*H874	W413*D608*H874
Container Loading (20'FT/40'GP/40'HQ)pcs	100/210/313	100/210/313	100/210/313
Net Weight (kg)	30.5	31	31.5
Gross Weight (kg)	34	34.5	34.5

*Optional Heating function: add a 4-way valve

Portable air conditioner PC-RMA



- *Cooling Capacity: 5,000~6,000 BTU (DOE)
- *Touch Pad on top with 7-Segment display
- *Cooling, Dehumidifying, fan
- *3-Step Fan Speed: High-Middle-Low
- *User-Friendly Program: Auto/ Lock/ Sleep
- *24Hour Timer: Auto-On/Auto-Off
- *Self-Evaporating Technique: No Draining and No Dripping, Power-Saving

Close look



LED Display



Exhaust at Back



The unique streamlined air outlet




Simple Grille



Power cord winding position

Standard features

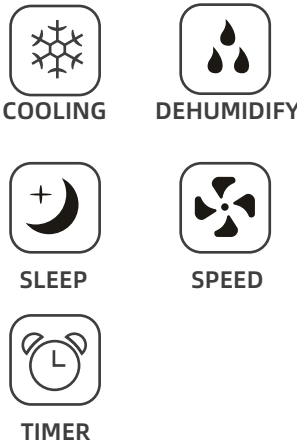

Optional features



	PC5R-RMA	PC6R-RMA
Power source	110-120V/60HZ	110-120V/60HZ
Cooling capacity(w)26.7°C/19.4°C	1500	1700
Cooling capacity (BTU)	5000	6000
Cooling Rated Power (W)	819	922
Air volume (m³/h)	190	190
CEER (BTU/WH)	6.1	6.51
Model	Cooling,fan,swing	Cooling,fan,swing
Refrigerant	R32	R32
Noise (dBA)	65	65
Unit dimensions (mm)	W342*D315.5*H712	W342*D315.5*H712
Packing dimensions (mm)	W385*D346.5*H889.5	W385*D346.5*H889.5
Container Loading (20'FT/40'GP/40'HQ)pcs	360/750/750	360/750/750
Net weight (kg)	21	22
Gross weight (kg)	23	24

Portable air conditioner PC-PMA/PMC



- *Cooling Capacity: 7,000~9,000 BTU
- *Auto-Swing: efficiently runs the cool air cycle
- *Touch Pad on top with 7-Segment display
- *Cooling, Dehumidifying, fan
- *3-Step Fan Speed: High-Middle-Low
- *User-Friendly Program: Auto/ Lock/ Sleep
- *24Hour Timer: Auto-On/Auto-Off
- *Self-Evaporating Technique: No Draining and No Dripping, Power-Saving

Close look



LED Display



Exhaust at Back



Auto Swing(Vertical)




Simple Grille



Two Filters (Back & Side)

Standard features

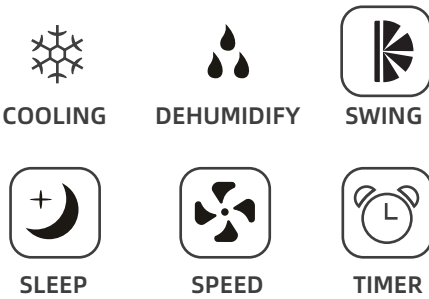

Optional features




Model	PC15R-PMA /PMC	PC20R-PMA /PMC	PC26R-PMA /PMC	PC30R-PMA /PMC	PC35R-PMA /PMC
Cooling Capacity (BTU)	5000	7000	9000	10000	12000
Cooling Capacity (W)	1500	2000	2600	3000	3500
Cooling power consupction(W)	570	765	1000	1150	1345
Dehumidification (30°C, RH80%)(L/Day)	25L	30L	40L	50L	60L
Air volume(m3/h)	250	250	280	280	280
EER	2.6	2.6	2.6	2.6	2.6
Refrigerant	R290/R410a	R290/R410a	R290/R410a	R290/R410a	R290/R410a
Noise (dBA)	65	65	65	65	65
Unit Dimensions (mm)	W310*D340*H715	W310*D340*H715	W310*D340*H715	W310*D340*H715	W310*D340*H715
Packing Dimensions (mm)	W360*D390*H885	W360*D390*H885	W360*D390*H885	W360*D390*H885	W360*D390*H885
Container Loading (20'FT/40'GP/40'HQ)pcs	176/376/569	176/376/569	176/376/569	176/376/569	176/376/569
Net Weight (kg)	23.5	23.5	23.5	24.5	24.5
Gross Weight (kg)	25.5	25.5	25.5	26.5	26.5

Portable air conditioner PC-QMA



- *Cooling Capacity: 7,000 BTU
- *Touch Pad on top with 7-Segment display
- *Cooling, Dehumidifying, fan
- *3-Step Fan Speed: High-Middle-Low
- *User-Friendly Program: Auto/ Lock/ Sleep
- *24Hour Timer: Auto-On / Auto-Off
- *Self-Evaporating Technique:
No Draining and No Dripping, Power-Saving

Standard features

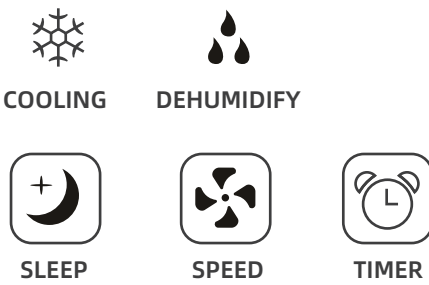

Optional features



Close look



LED Display



Exhaust at Back



Simple Grille & Washable filter



QMA Hand moved Swing(Vertical)

Model	PC20R-QMA
Cooling Capacity (BTU)	7000
Cooling Capacity (W)	2000
Cooling power consupction(W)	769
Dehumidification (30°C, RH80%) (L/Day)	30L
Air volume(m3/h)	250
EER	2.6
Refrigerant	R290/R410a
Noise (dBA)	65
Unit Dimensions (mm)	W295*D330*H686
Packing Dimensions (mm)	W340*D383*H840
Container Loading (20'FT/40'GP/40'HQ)pcs	190/408/612
Net Weight (kg)	22.5
Gross Weight (kg)	24.5

Portable air conditioner PC-AMA



- *Cooling Capacity: 9,000~14,000 BTU/H
- *Electronic Touch Pad
- *Interchangeable Air-Outlets (Blades/ Hose Adapter)
- *3in1: Cooling, Heating, Dehumidifying
- *Two powerful motors generates superb airflow
- *24Hour Timer: Auto-On / Auto-Off
- *Self-Evaporating : No Draining & No Dripping
- *Powerful dehumidify capacity: 50L~65L/Day
- *Special exhaust hose packaging design in unit
- *Optional Accessory "Window Kits ", use Indoor & Outdoor
- *Double tube mode can be the overall cooling (optional)

Close look



Removable Filters



Remote Control



Air Outlet



Built-in Exhaust Hose



Electric Panel

Standard features


COOLING


DEHUMIDIFY


HEATING



SLEEP


SPEED


TIMER

Optional features


WIFI

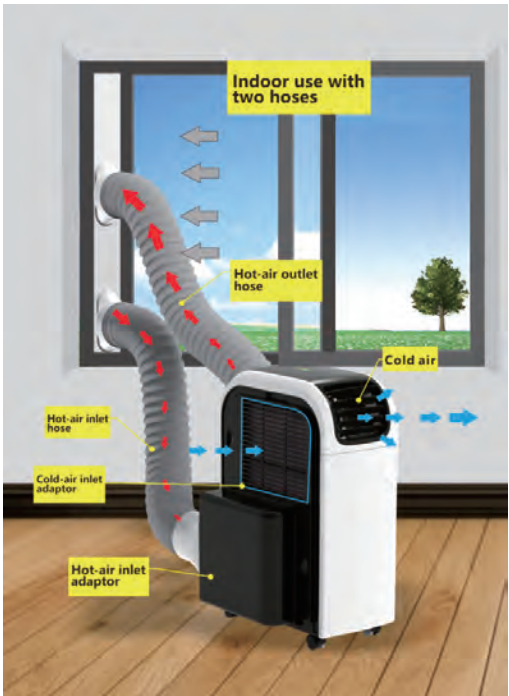

Double tube mode can be the overall cooling .Indoor air is not exchanged with the outside air. It is the inner loop and can achieve the overall cooling effect.


Model	PC26R-AMA	PC30R-AMA	PC35R-AMA	PC40R-AMA
Cooling Capacity (BTU)	9000	10000	12000	14000
Cooling Capacity (W)	2600	3000	3500	4000
Cooling power consumption(W)	1000	1150	1345	1535
Heating Capacity (BTU)	9000	10000	12000	14000
Heating Capacity (W)	2600	3000	3500	4000
Heating power consumption(W)	835	965	1125	1290
Dehumidification (30°C, RH80%) (L/Day)	40	50	60	70
Air volume(m3/h)	450	450	450	450
EER	2.6	2.6	2.6	2.6
Refrigerant Type	R290/R410a	R290/R410a	R290/R410a	R290/R410a
Noise (dBA)	65	65	65	65
Unit Dimensions (mm)	W300*D486*H740	W300*D486*H740	W300*D486*H740	W300*D486*H740
Packing Dimensions (mm)	W330*D540*H780	W330*D540*H780	W330*D540*H780	W330*D540*H780
Container Loading (20'FT/40'GP/40'HQ)pcs	208/434/462	208/434/462	208/434/462	208/434/462
Net Weight (kg)	28.5	29.5	30.5	32
Gross Weight (kg)	30.5	31.5	32.5	33.5

Portable air conditioner PC-AMB



- *Cooling Capacity: 7,000~14,000 BTU/H
- *Electronic Touch Pad
- *Interchangeable Air-Outlets (Blades/ Hose Adapter)
- *3in1: Cooling, Heating, Dehumidifying
- *Two powerful motors generates superb airflow
- *24Hour Timer: Auto-On / Auto-Off
- *Self-Evaporating : No Draining & No Dripping
- *Powerful dehumidify capacity: 50L~65L/Day
- *Special exhaust hose packaging design in unit
- *Optional Accessory "Window Kits" , use Indoor & Outdoor
- *Lite size for 7,000~9,000 BTU
- *Double tube mode can be the overall cooling (optional)


Standard features

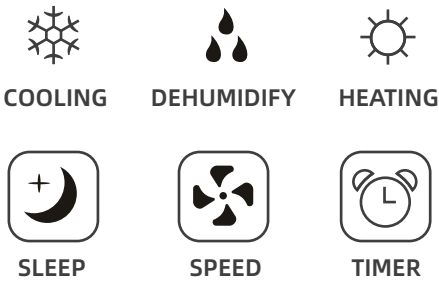


Optional features



Double tube mode can be the overall cooling .Indoor air is not exchanged with the outside air. It is the inner loop and can achieve the overall cooling effect.

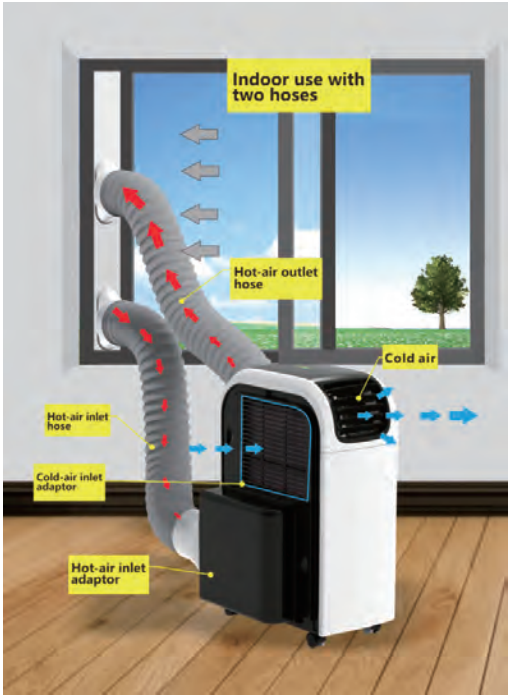

Close look

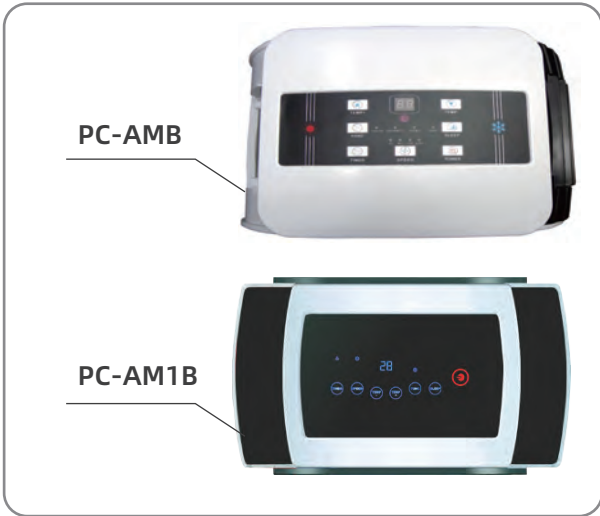


Model	PC20R-AMB2 PC20R-AM1B2	PC26R-AMB2 PC26R-AM1B2	PC30R-AMB PC30R-AM1B	PC35R-AMB PC35R-AM1B	PC40R-AMB PC40R-AM1B
Cooling Capacity (BTU)	7000	9000	10000	12000	14000
Cooling Capacity (W)	2000	2600	3000	3500	4000
Cooling power consumption(W)	765	1000	1150	1345	1535
Heating Capacity (BTU)	7000	9000	10000	12000	14000
Heating Capacity (W)	2000	2600	3000	3500	4000
Heating power consumption(W)	645	835	965	1125	1290
Dehumidification(30°C,RH80%)(L/Day)	30	40	50	60	70
Air volume(m3/h)	360	360	450	450	450
EER	2.6	2.6	2.6	2.6	2.6
Refrigerant Type	R290/R410a	R290/R410a	R290/R410a	R290/R410a	R290/R410a
Noise (dBA)	65	65	65	65	65
Unit Dimensions (mm)	W300*D480*H618	W300*D480*H618	W300*D505*H778	W300*D505*H778	W300*D505*H778
Packing Dimensions (mm)	W330*D510*H660	W330*D510*H660	W330*D550*H815	W330*D550*H815	W330*D550*H815
Container Loading (20'FT/40'GP/40'HQ)pcs	234/486/620	234/486/620	148/302/453	148/302/453	148/302/453
Net Weight (kg)	26.5	27.5	28.5	29.5	30.5
Gross Weight (kg)	28.5	29.5	30.5	31.5	32.5

Portable air conditioner PC-AMD



- *Cooling Capacity: 7,000~14,000 BTU/H
- *Electronic Touch Pad
- *Interchangeable Air-Outlets (Blades/ Hose Adapter)
- *3in1: Cooling, Heating, Dehumidifying
- *Two powerful motors generates superb airflow
- *24Hour Timer: Auto-On/Auto-Off
- *Self-Evaporating : No Draining & No Dripping
- *Powerful dehumidify capacity: 50L~65L/Day
- *Special exhaust hose packaging design in unit
- *Optional Accessory "Window Kits ", use Indoor & Outdoor
- *Lite size for 7,000~9,000 BTU

Standard features

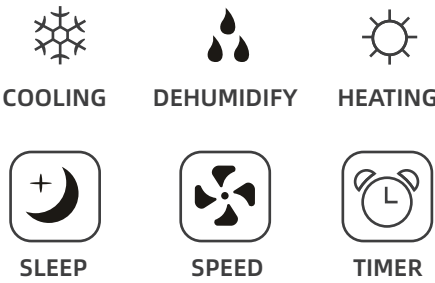

Optional features



Close look



Model	PC20R-AMD2	PC26R-AMD2	PC30R-AMD	PC35R-AMD	PC40R-AMD
Cooling Capacity (BTU)	7000	9000	10000	12000	14000
Cooling Capacity (W)	2000	2600	3000	3500	4000
Cooling power comsumption(W)	765	1000	1150	1345	1535
Heating Capacity (BTU)	7000	9000	10000	12000	14000
Heating Capacity (W)	2000	2600	3000	3500	4000
Heating power comsumption(W)	645	835	965	1125	1290
Dehumidification (30°C, RH80%) (L/Day)	30	40	50	60	70
Air volume(m3/h)	360	360	450	450	450
EER	2.6	2.6	2.6	2.6	2.6
Refrigerant Type	R290/R410a	R290/R410a	R290/R410a	R290/R410a	R290/R410a
Noise (dBA)	65	65	65	65	65
Unit Dimensions (mm)	W300*D480*H618	W300*D480*H618	W300*D505*H778	W300*D505*H778	W300*D505*H778
Packing Dimensions (mm)	W330*D510*H660	W330*D510*H660	W330*D550*H815	W330*D550*H815	W330*D550*H815
Container Loading (20'FT/40'GP/40'HQ)pcs	234/486/622	234/486/622	144/302/453	144/302/453	144/302/453
Net Weight (kg)	25.6	27.5	28.5	29.5	30.5
Gross Weight (kg)	28.3	29.5	30.5	31.5	32.5

Portable air conditioner PC-AME



- *Cooling Capacity: 7,000~14,000 BTU/H
- *Electronic Panel (PC-AME, AME2) or Touch Pad (PC-AM1E)
- *Interchangeable Air-Outlets (Blades/ Hose Adapter)
- *3in1: Cooling, Heating, Dehumidifying
- *Two powerful motors generates superb airflow
- *24Hour Timer: Auto-On/Auto-Off
- *Self-Evaporating : No Draining & No Dripping
- *Powerful dehumidify capacity: 50L~65L/Day
- *Special exhaust hose packaging design in unit
- *Optional Accessory "Window Kits" , use Indoor & Outdoor
- *Lite size for 7,000~9,000 BTU
- *Double tube mode can be the overall cooling (optional)

Standard features


COOLING


DEHUMIDIFY


HEATING


SLEEP



SPEED


TIMER

Optional features


WIFI


SWING

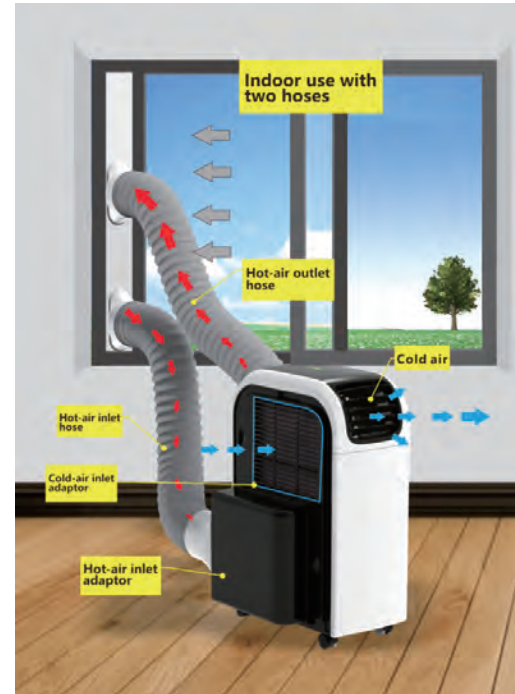

Double tube mode can be the overall cooling .Indoor air is not exchanged with the outside air. It is the inner loop and can achieve the overall cooling effect.

Close look


Removable Filters


Remote Control


Air Outlet
(optional : auto swing)
(optional : air freshener)


PC-AME
Electric Panel


Built-in Exhaust Hose

Model	PC20R-AME2	PC26R-AME2	PC30R-AME	PC35R-AME	PC40R-AME
Cooling Capacity (BTU)	7000	9000	10000	12000	14000
Cooling Capacity (W)	2000	2600	3000	3500	4000
Cooling power consumption(W)	765	1000	1150	1345	1535
Heating Capacity (BTU)	7000	9000	10000	12000	14000
Heating Capacity (W)	2000	2600	3000	3500	4000
Heating power consumption(W)	645	835	965	1125	1290
Dehumidification (30°C, RH80%) (L/Day)	30	40	50	60	70
Air volume(m3/h)	360	360	450	450	450
EER	2.6	2.6	2.6	2.6	2.6
Refrigerant Type	R290/R410a	R290/R410a	R290/R410a	R290/R410a	R290/R410a
Noise (dBA)	65	65	65	65	65
Unit Dimensions (mm)	W300*D526*H612	W300*D526*H612	W300*D550*H760	W300*D550*H760	W300*D550*H760
Packing Dimensions (mm)	W330*D560*H660	W330*D560*H660	W330*D580*H815	W330*D580*H815	W330*D580*H815
Container Loading (20'FT/40'GP/40'HQ)pcs	213/444/568	213/444/568	140/288/432	140/288/432	140/288/432
Net Weight (kg)	25.6	27.5	28.5	29.5	30.5
Gross Weight (kg)	28.3	29.5	30.5	31.5	32.5

Portable air conditioner PC-AMF



- *Cooling Capacity: 7,000~14,000 BTU/H
- *Electronic Panel (PC-AMF, AMF2) or Touch Pad (PC-AM1F)
- *Interchangeable Air-Outlets (Blades/ Hose Adapter)
- *3in1: Cooling, Heating, Dehumidifying
- *Two powerful motors generates superb airflow
- *24Hour Timer: Auto-On/Auto-Off
- *Self-Evaporating : No Draining & No Dripping
- *Powerful dehumidify capacity: 50L~65L/Day
- *Special exhaust hose packaging design in unit
- *Optional Accessory "Window Kits" , use Indoor & Outdoor
- *Lite size for 7,000~9,000 BTU
- *Double tube mode can be the overall cooling (optional)

Close look



Removable Filters



Remote Control



Air Outlet
(optional : auto swing)
(optional : air freshener)




Electric Panel





Built-in Exhaust Hose

Standard features

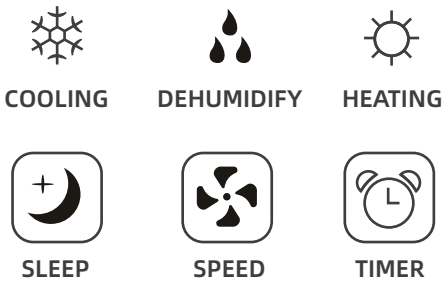

Optional features

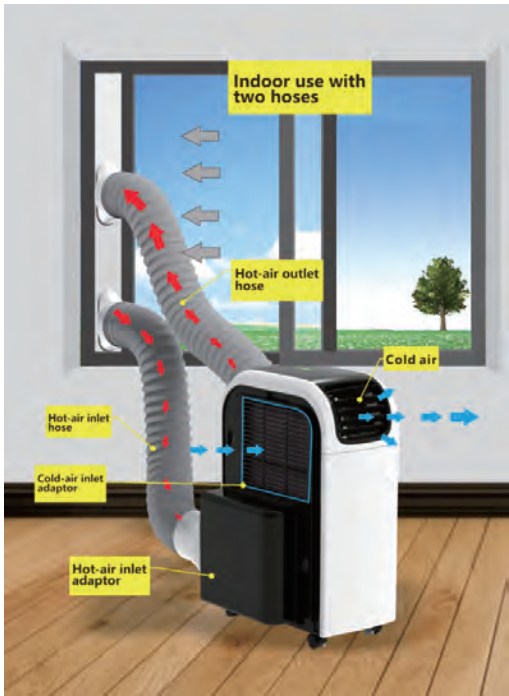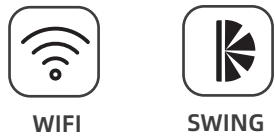

Double tube mode can be the overall cooling .Indoor air is not exchanged with the outside air. It is the inner loop and can achieve the overall cooling effect.

Model	PC20R-AMF2	PC26R-AMF2	PC30R-AMF	PC35R-AMF	PC40R-AMF
Cooling Capacity (BTU)	7000	9000	10000	12000	14000
Cooling Capacity (W)	2000	2600	3000	3500	4000
Cooling power consumption(W)	765	1000	1150	1345	1535
Heating Capacity (BTU)	7000	9000	10000	12000	14000
Heating Capacity (W)	2000	2600	3000	3500	4000
Heating power consumption(W)	645	835	965	1125	1290
Dehumidification (30°C, RH80%) (L/Day)	30	40	50	60	70
Air volume(m3/h)	360	360	450	450	450
EER	2.6	2.6	2.6	2.6	2.6
Refrigerant Type	R290/R410a	R290/R410a	R290/R410a	R290/R410a	R290/R410a
Noise (dBA)	65	65	65	65	65
Unit Dimensions (mm)	W300*D526*H612	W300*D526*H612	W300*D550*H760	W300*D550*H760	W300*D550*H760
Packing Dimensions (mm)	W330*D560*H660	W330*D560*H660	W330*D580*H815	W330*D580*H815	W330*D580*H815
Container Loading (20'FT/40'GP/40'HQ)pcs	213/444/568	213/444/568	140/288/432	140/288/432	140/288/432
Net Weight (kg)	25.6	27.5	28.5	29.5	30.5
Gross Weight (kg)	28.3	29.5	30.5	31.5	32.5

Portable air conditioner PC-AMH



- *Cooling Capacity: 7,000~14,000 BTU/H
- *Unique Touch Pad with Electric Knobs
- *Interchangeable Air-Outlets (Blades/ Hose Adapter)
- *3in1: Cooling, Heating, Dehumidifying
- *Two powerful motors generates superb airflow
- *24Hour Timer: Auto-On/Auto-Off
- *Self-Evaporating : No Draining & No Dripping
- *Powerful dehumidify capacity: 50L~65L/Day
- *Special exhaust hose packaging design in unit
- *Optional Accessory "Window Kits" , use Indoor & Outdoor
- *Lite size for 7,000~9,000 BTU
- *Double tube mode can be the overall cooling (optional)

Close look



LED Touch Pad



Streamlined Case




Internal Hose Storage





Interchangeable Air Outlets (Cold/Hot)

Standard features

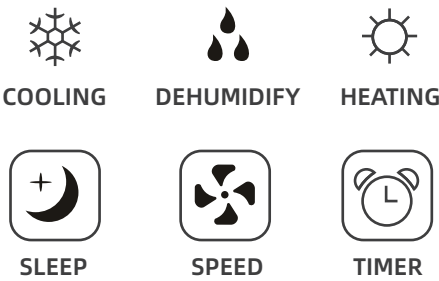

Optional features

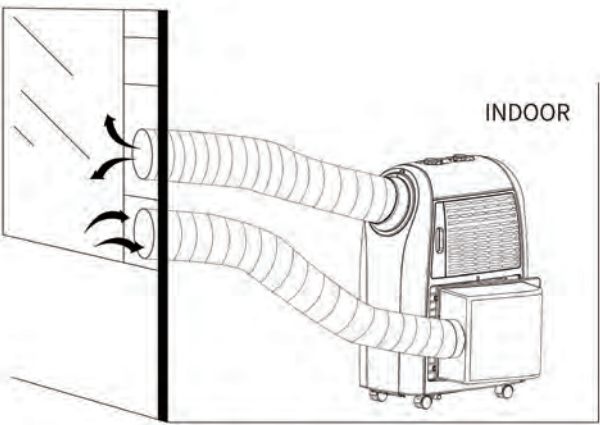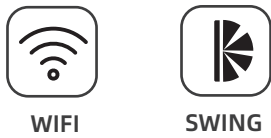

Double tube mode can be the overall cooling .Indoor air is not exchanged with the outside air. It is the inner loop and can achieve the overall cooling effect.

Model	PC20R-AMH2	PC26R-AMH2	PC30R-AMH	PC35R-AMH	PC40R-AMH
Cooling Capacity (BTU)	7000	9000	10000	12000	14000
Cooling Capacity (W)	2000	2600	3000	3500	4000
Cooling power consupton(W)	765	1000	1150	1345	1535
Heating Capacity (BTU)	7000	9000	10000	12000	14000
Heating Capacity (W)	2000	2600	3000	3500	4000
Heating power consupton(W)	645	835	965	1125	1290
Dehumidification (30°C, RH80%) (L/Day)	30	40	50	60	70
Air volume(m3/h)	360	360	450	450	450
EER	2.6	2.6	2.6	2.6	2.6
Refrigerant Type	R290/R410a	R290/R410a	R290/R410a	R290/R410a	R290/R410a
Noise (dBA)	65	65	65	65	65
Unit Dimensions (mm)	W315*D540*H640	W315*D540*H640	W325*D540*H790	W325*D540*H790	W325*D540*H790
Packing Dimensions (mm)	W376*D631*H667	W376*D631*H667	W401*D636*H844	W401*D636*H844	W401*D636*H844
Container Loading (20'FT/40'GP/40'HQ)pcs	162/336/443	162/336/443	102/212/318	102/212/318	102/212/318
Net Weight (kg)	25.6	27.5	28.5	29.5	30.5
Gross Weight (kg)	28.3	29.5	30.5	31.5	32.5

Portable air conditioner PC-AMK



- *Cooling Capacity:9,000~14,000 BTU/H
- *Soft Touch Pad
- *Interchangeable Air-Outlets (Blades/ Hose Adapter)
- *3in1: Cooling, Heating, Dehumidifying
- *Two powerful motors generates superb airflow
- *24Hour Timer: Auto-On / Auto-Off
- *Self-Evaporating : No Draining & No Dripping
- *Powerful dehumidify capacity: 50L~65L/Day
- *Special exhaust hose packaging design in unit
- *Optional Accessory "Window Kits" , use Indoor & Outdoor
- *Double tube mode can be the overall cooling (optional)

Standard features


COOLING


DEHUMIDIFY


HEATING


SLEEP



SPEED


TIMER

Optional features


WIFI


SWING

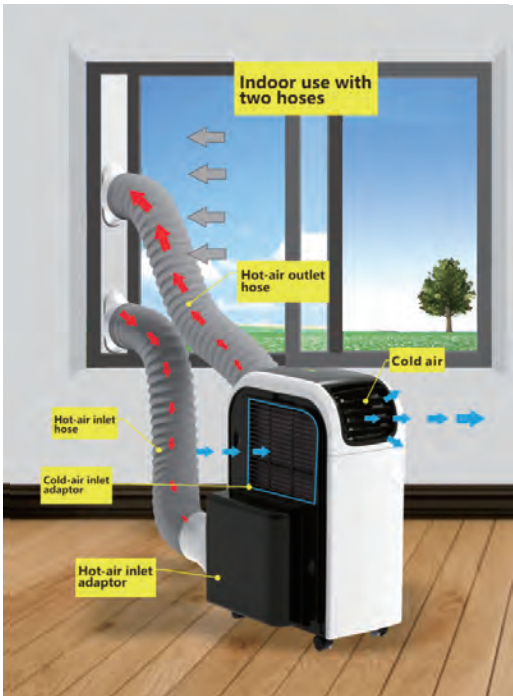

Double tube mode can be the overall cooling .Indoor air is not exchanged with the outside air. It is the inner loop and can achieve the overall cooling effect.

Close look

**Removable Filters**

**Remote Control**

**Air Outlet**

**Soft-Touch Panel**

**Built-in Exhaust Hose**


Model	PC26R-AMK	PC30R-AMK	PC35R-AMK	PC40R-AMK
Cooling Capacity (BTU)	9000	10000	12000	14000
Cooling Capacity (W)	2600	3000	3500	4000
Cooling power consupction(W)	1000	1150	1345	1535
Heating Capacity (BTU)	9000	10000	12000	14000
Heating Capacity (W)	2600	3000	3500	4000
Heating power consupction(W)	835	965	1125	1290
Dehumidification (30°C, RH80%) (L/Day)	40L	50L	60L	70L
Air volume(m3/h)	450	450	450	450
EER	2.6	2.6	2.6	2.6
Refrigerant Type	R290/R410a	R290/R410a	R290/R410a	R290/R410a
Noise (dBA)	65	65	65	65
Unit Dimensions (mm)	W300*D505*H775	W300*D505*H775	W300*D505*H775	W300*D505*H775
Packing Dimensions (mm)	W330*D550*H835	W330*D550*H835	W330*D550*H835	W330*D550*H835
Container Loading (20'FT/40'GP/40'HQ)pcs	148/302/453	148/302/453	148/302/453	148/302/453
Net Weight (kg)	27.5	28.5	29.5	30.5
Gross Weight (kg)	29.5	30.5	31.5	32.5

Portable air conditioner PC-KMG




- *Cooling Capacity: 7,000~12,000 BTU/H
- *Cooling, Dehumidifying, Ventilating
- *Touch Pad with 7-Segment display
- *Compact one-piece-formed design
- *Single motor unit, more quiet and lighter.
- *Double layer blades, with Auto-Swing
- *24Hour Timer: Auto-On/Auto-Off (Unique!)
- *Self-Evaporating : No Draining & No Dripping
- *Powerful dehumidify capacity: 30L~55L/Day
- *Special exhaust hose packaging design in unit
- *Could Adapt to Accessory "Window Kits ", and "Return Airway Cover" to improve cooling efficiency.

Standard features

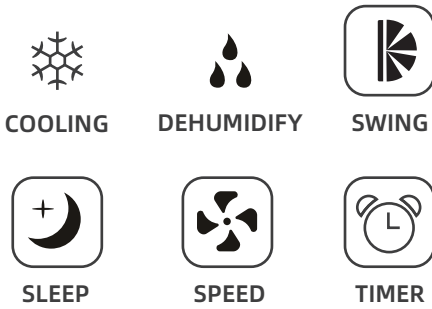

Optional features

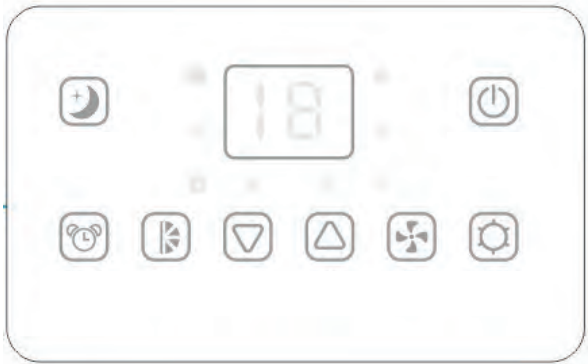

Close look




Touch Pad



Different Control Panels



Blades Knob

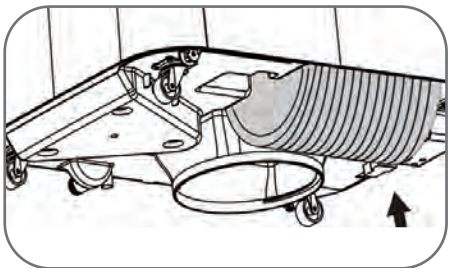


Built-In Ducts



Two Filters


Model	PC20R-KMG	PC26R-KMG	PC35-KMG
Cooling Capacity (BTU)	2000W	2600W	3500W
Cooling Capacity (W)	7000Btu	9000Btu	12000Btu
Cooling power consumption(W)	700	1000	1150
Air volume(m3/h)	310	360	360
Dehumidification (30°C, RH80%) (L/Day)	30L/Day	50L/Day	55L/Day
Refrigerant	R290/R410a	R290/R410a	R410a
Noise(dBA)	65	65	65
Unit Dimensions(mm)	W330*D480*H490	W330*D480*H490	W330*D480*H490
Packing Dimensions(mm)	W408*D549*H530	W408*D549*H530	W408*D549*H530
Container Loading(20'FT/40'GP/40'HQ)pcs	236/488/588	236/488/588	236/488/588
Net Weight (kg)	23.5	24.5	25.5
Gross Weight (kg)	25.5	26.5	27.5

Portable air conditioner PC-BMA/BMD/BM1D

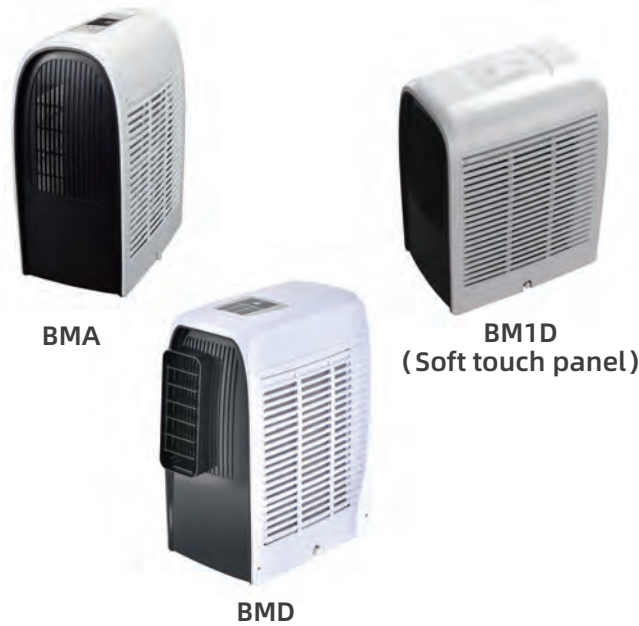

- *Cooling Capacity: 7,000~9,000 BTU/H
- *Cooling, Dehumidifying
- *Electronic control panel
- *Compact one-piece-formed design
- *Single motor unit, more quiet and lighter weight.
- *User-Friendly Program: Auto/Speed/Lock/Sleep
- *24Hour Timer: Auto-On/Auto-Off (Unique!)
- *Self-Evaporating : No Draining & No Dripping
- *Powerful dehumidify capacity: 30L~55L/Day
- *Special exhaust hose packaging design in unit
- *Could Adapt to Accessory "Window Kits" , and
- *Double tube mode can be the overall cooling (optional).

Standard features

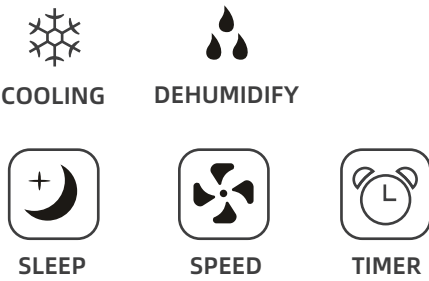

Optional features



Double tube mode can be the overall cooling .Indoor air is not exchanged with the outside air. It is the inner loop and can achieve the overall cooling effect.

Close look

PC-BMA



PC-BMD key-pressing panel



PC-BM1D Soft touch control panel



Model (GS/ CE)	PC20R-BMD/BMA	PC26R-BMD/BMA	PC20R-BM1D	PC26R-BM1D
Cooling capacity (W)	2000	2600	2000	2600
Cooling capacity (BTU)	7000	9000	7000	9000
Dehumidification (30°C, RH80%) (L /Day)	30	50	30	50
Air volume (m³/h)	360	360	360	360
EER	2.6	2.6	2.6	2.6
Noise (dBA)	65	65	65	65
Refrigerant	R290/R410a	R290/R410a	R290/R410a	R290/R410a
Unit dimensions (mm)	W288xD428xH640	W288xD428xH640	W288xD428xH625	W288xD428xH625
Packing dimensions (mm)	W318xD463xH660	W318xD463xH660	W372xD537xH700	W372xD537xH700
Container Loading (20'FT/40'GP/40'HQ)pcs	270/558/704	270/558/704	192/396/396	192/396/396
Net weight (kg)	22.5	23.5	22.5	23.5
Gross weight (kg)	24.5	25.5	24.5	25.5

Portable air conditioner PC-BMF/BMG




- *Cooling Capacity: 7,000~9,000 BTU/H
- *Cooling, Dehumidifying
- *Touch Pad with 7-Segment display
- *Compact one-piece-formed design
- *Single motor unit, more quiet and lighter weight.
- *User-Friendly Program: Auto/Speed/ Lock/ Sleep
- *24Hour Timer: Auto-On/Auto-Off (Unique!)
- *Self-Evaporating : No Draining & No Dripping
- *Powerful dehumidify capacity: 30L~55L/Day
- *Special exhaust hose packaging design in unit
- *Could Adapt to Accessory "Window Kits.

Close look



2 air outlet louver.

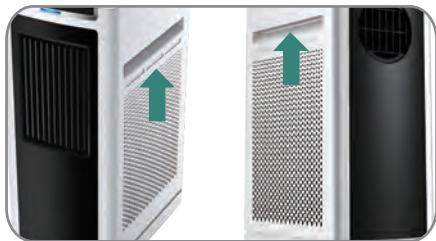

Removable Filters



remote control.




←PC-BMG

Soft-Touch Panel



PC-BMF →

Standard features

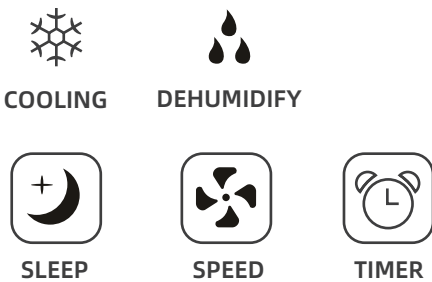

Optional features



BMG



BMF


Model (GS/ CE)	PC20R-BMG/BMF	PC26R-BMG/BMF
Cooling capacity (W)	2000	2600
Cooling capacity (BTU)	7000	9000
Dehumidification (30°C, RH80%) (L/Day)	30	50
Air volume (m³/h)	360	360
EER	2.6	2.6
Noise (dBA)	65	65
Refrigerant	R290/R410a	R290/R410a
Unit dimensions (mm)	W288xD428xH640	W288x D428xH640
Packing dimensions (mm)	W385xD560xH768(PC-BMG) W370xD607xH755(PC-BMF)	W385xD560xH768(PC-BMG) W370xD607xH755(PC-BMF)
Container Loading(20'FT/40'GP/40'HQ)pcs	170/357/378(PC-BMG) 171/366/366(PC-BMF)	170/357/378(PC-BMG) 171/366/366(PC-BMF)
Net weight (kg)	22.5	23.5
Gross weight (kg)	24.5	25.5

Portable air conditioner PC-DM1H/PCX-DM1H (Hoseless)



- *Max. Cooling Capacity: 3,000 BTU/H
- *Ultra low power consumption 360W, available to use in outdoor activity with portable battery
- *Touch Pad with LED display (7 segment)
- *Function: Cooling, Dehumidifying, Ventilating
- *Optional: Purifying(HEPA/Carbon filter)
- *Moist Humidify: 200ml/Hour
- *24Hour Timer: Auto-On/Auto-Off
- *Powerful dehumidify capacity: 20L~25L/Day
- *User-Friendly Program: Auto/ Lock/ Sleep
- *Could Adapt to Accessory "Window Kits"

Standard features

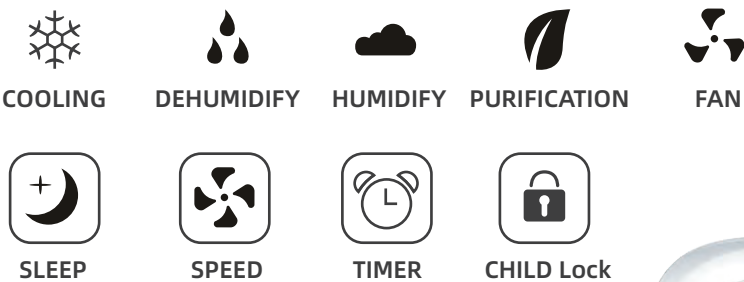

Optional features



Soft touch pad

Close look



Hose Removable



Water Tank



Multiple Filtrations(HEPA/ Carbon)



Up-Blow CoolAir(Hose attachable)


Model	PCX6R-DM1H(Hoseless)	PCX9R-DM1H(Hoseless)	PC9R-DM1H
Cooling capacity (W)	600	900	900
Cooling capacity (BTU)	2000	3000	3000
Cooling power consumption (W)	270	310	360
humidifying capacity(L/H)	/	/	0.2
Dehumidification (30°C, RH80%) (L/Day)	25	25	25
Air volume (m³/h)	140	140	140
EER	2.5	2.5	2.5
Noise (dBA)	42-46	42-46	42-46
Unit dimensions (mm)	W280xD375xH505	W280xD375xH505	W280xD375xH505
Packing dimensions (mm)	W310xD470xH530	W310xD470xH530	W310xD470xH530
Container Loading (20'FT/40'GP/40'HQ)pcs	344/708/880	344/708/880	344/708/880
Net weight (kg)	13.5	14.5	14.5
Gross weight (kg)	14.7	15.7	15.7

Portable air conditioner PC-DM2A/PCX-DM2A(Hoseless)




- *Max. Cooling Capacity: 3,000 BTU/H
- *Ultra low power consumption 360W, available to use in outdoor activity with portable battery
- *Touch Pad with LCD display
- *Function: Cooling, Dehumidifying, Ventilating
- *Optional: Purifying(HEPA/ Carbon filter)
- *Moist Humidify: 200ml/ Hour
- *24Hour Timer: Auto-On / Auto-Off
- *Powerful dehumidify capacity: 20L~25L/Day
- *User-Friendly Program: Auto/ Lock/ Sleep
- *Could Adapt to Accessory "Window Kits"
- *Real Hoseless portable air conditioner , No Hot Air, No Exhaust Hose(Water absorbs heat and evaporates)

Standard features

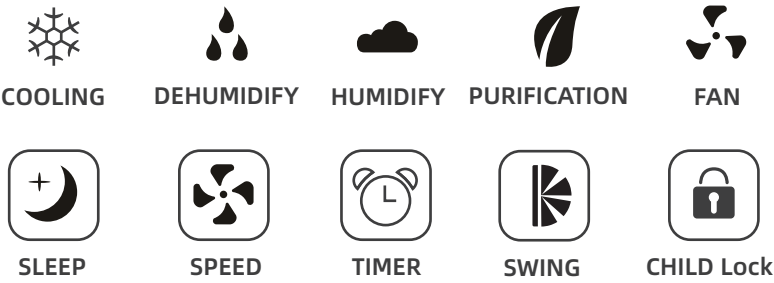

Optional features

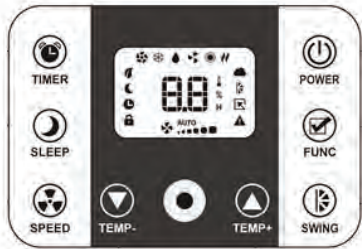

Close look



Compressor cooling makes the max. temperature difference at air outlet vent:12°C




2 air outlet ouver.



HEPA/CARBON /ION filter.(optional)



Exhaust pipe andadapter which makes it with multifunctions:dry clothes, warmshoes,etc.

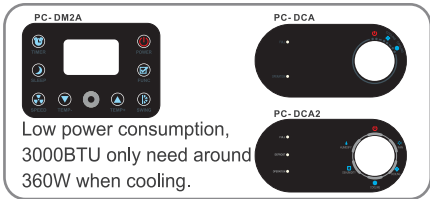

Low power consumption, 3000BTU only need around 360W when cooling.



With remote control and its location.



Water absorbs heat and evaporates , Hoesless AC got



World famous compressor



Self-diagnosis function



Super-quality internal threaded copper pipe

Model	PCX6R-DM2A(Hoseless)	PCX9R-DM2A(Hoseless)	PC9R-DM2A
Cooling capacity (W)	600	900	900
Cooling capacity (BTU)	2000	3000	3000
Cooling power consumption (W)	270	310	360
humidifying capacity(L/H)	/	/	0.2
Dehumidification (30°C, RH80%) (L/Day)	25	25	25
Air volume (m³/h)	130	130	130
EER	2.5	2.5	2.5
Noise (dBA)	42-46	42-46	42-46
Unit dimensions (mm)	W285xD375xH500	W285xD375xH500	W285xD375xH500
Packing dimensions (mm)	W310xD410xH530	W310xD410xH530	W310xD410xH530
Container Loading (20'/40'/40'HQ)pcs	408/848/1016	408/848/1016	408/848/1016
Net weight (kg)	13.5	15	14.5
Gross weight (kg)	14.7	16.7	15.7


Portable air conditioner PC-DMF/DMB/DMG

PCX-DMF/DMB/DMG (Hoseless)



- *Max. Cooling Capacity: 3,000 BTU/H
- *Ultra low power consumption 360W, available to use in outdoor activity with portable battery
- *Touch Pad with LED display (7 segment)
- *Function: Cooling, Dehumidifying, Ventilating
- *Optional: Purifying(HEPA/Carbon filter)
- *Moist Humidify: 200ml/Hour
- *24Hour Timer: Auto-On/Auto-Off
- *Powerful dehumidify capacity: 20L~25L/Day
- *User-Friendly Program: Auto/ Lock/ Sleep
- *Could Adapt to Accessory "Window Kits"
- *Real Hoseless portable air conditioner , No Hot Air, No Exhaust Hose(Water absorbs heat and evaporates)

Standard features

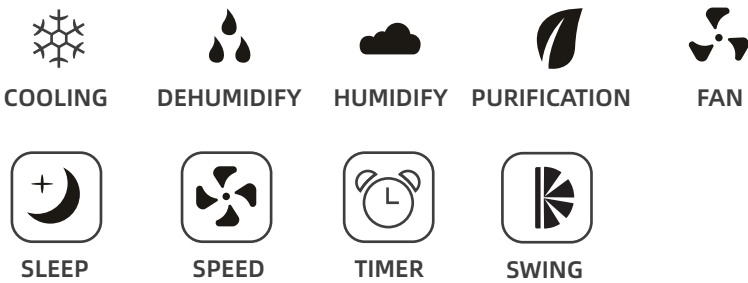


Optional features




Close look

DMB

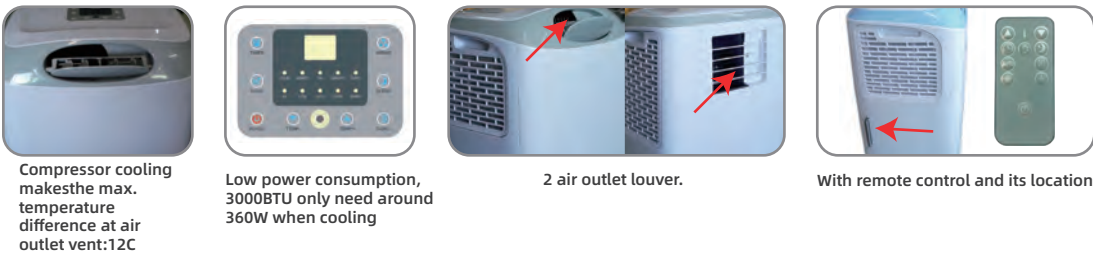

DMF

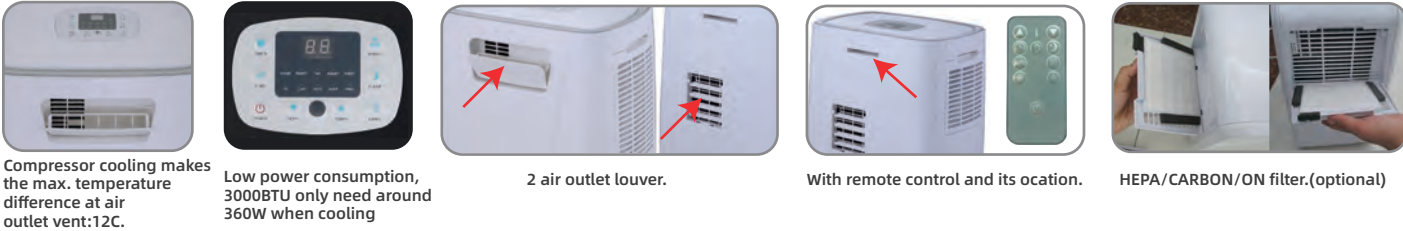


Model	PCX6R-DMB/DMF/DMG (Hoseless)	PCX9R-DMB/DMF/DMG (Hoseless)	PC9R-DMB/DMF/DMG
Cooling capacity (W)	600	900	900
Cooling capacity (BTU)	2000	3000	3000
Cooling power consumption (W)	270	310	360
humidifying capacity(L/H)	/	/	0.2
Dehumidification (30°C, RH80%) (L/Day)	25	25	25
Air volume (m³/h)	130	130	130
EER	2.5	2.5	2.5
Noise (dBA)	42-46	42-46	42-46
Unit dimensions (mm)	W285xD375xH500	W285xD375xH500	W285xD375xH500
Packing dimensions (mm)	W310xD450xH530(PC-DMB) W325xD438xH532(PC-DMF) W328xD462xH605(PC-DMG)	W310xD450xH530(PC-DMB) W325xD438xH532(PC-DMF) W328xD462xH605(PC-DMG)	W310xD450xH530(PC-DMB) W325xD438xH532(PC-DMF) W328xD462xH605(PC-DMG)
Container Loading (20'/40'/40'HQ)pcs	376/784/938(PC-DMB) 364/760/917(PC-DMF) 261/543/724(PC-DMG)	376/784/938(PC-DMB) 364/760/917(PC-DMF) 261/543/724(PC-DMG)	376/784/938(PC-DMB) 364/760/917(PC-DMF) 261/543/724(PC-DMG)
Net weight (kg)	13.5	15	14.5
Gross weight (kg)	14.7	16.7	15.7

Portable air conditioner PC-DM1D/PCX-DM1D(Hoseless)



- *Max. Cooling Capacity: 3,000 BTU/H
- *Ultra low power consumption 360W, available to use in outdoor activity with portable battery
- *Touch Pad with LCD display
- *Function: Cooling, Dehumidifying, Ventilating
- *Optional: Purifying(HEPA/ Carbon filter)
- *Moist Humidify: 200ml/ Hour
- *24Hour Timer: Auto-On / Auto-Off
- *Powerful dehumidify capacity: 20L~25L/Day
- *User-Friendly Program: Auto/ Lock/ Sleep
- *Could Adapt to Accessory "Window Kits"
- *Real Hoseless portable air conditioner , No Hot Air, No Exhaust Hose(Water absorbs heat and evaporates)

Standard features

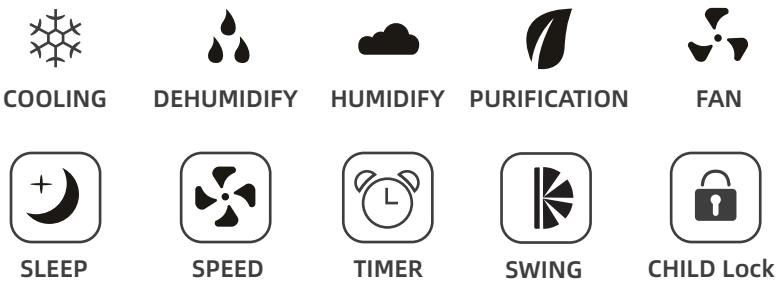

Optional features



Close look




Compressor cooling makes the max. temperature difference at air outlet vent:12C



Low power consumption, 3000BTU only need around 360W when cooling



2 air outlet louver.

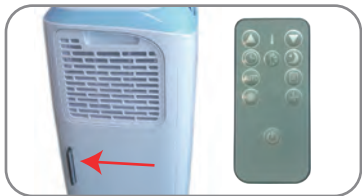

With remote control and its location.



HEPA/CARBON/ON filter.(optional)



Exhaust pipe and adapter which makes it with multifunctions:dry clothes, warmshoes,etc.



Model	PCX6R-DM1D(Hoseless)	PCX9R-DM1D(Hoseless)	PC9R-DM1D
Cooling capacity (W)	600	900	900
Cooling capacity (BTU)	2000	3000	3000
Cooling power consumption (W)	270	310	360
humidifying capacity(L/H)	/	/	0.2
Dehumidification (30°C, RH80%) (L/Day)	25	25	25
Air volume (m³/h)	130	130	130
EER	2.5	2.5	2.5
Noise (dBA)	42-46	42-46	42-46
Unit dimensions (mm)	W280xD375xH505	W280xD375xH505	W280xD375xH505
Packing dimensions (mm)	W310xD450xH530	W310xD450xH530	W310xD450xH530
Container Loading (20'/40'/40'HQ)pcs	376/784/938	376/784/938	376/784/938
Net weight (kg)	13.5	15	14.5
Gross weight (kg)	14.7	16.7	15.7


Portable air conditioner PC-LMA/LMB

PCX-LMA/LMB(Hoseless)



- *Max. Cooling Capacity: 3,000 BTU/H
- *Ultra low power consumption 360W, available to use in outdoor activity with portable battery
- *Touch Pad with LED display (7 segment)
- *Function: Cooling, Dehumidifying, Ventilating
- *Optional: Purifying(HEPA/ Carbon filter)
- *Moist Humidify: 200ml/ Hour
- *24Hour Timer: Auto-On / Auto-Off
- *Powerful dehumidify capacity: 20L~25L/Day
- *User-Friendly Program: Auto
- *Could Adapt to Accessory "Window Kits"
- *Real Hoseless portable air conditioner , No Hot Air, No Exhaust Hose(Water absorbs heat and evaporates)


Standard features

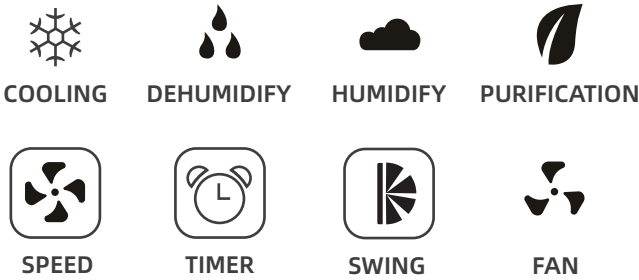

Optional features



Close look

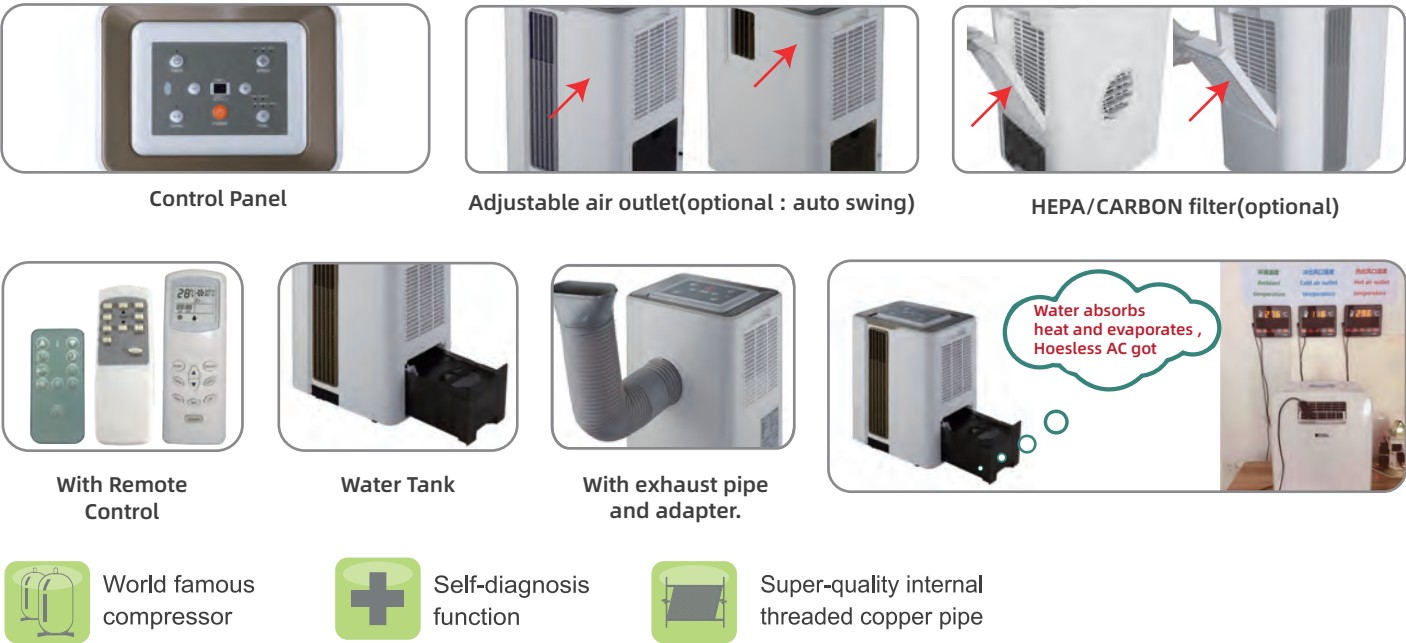

Model	PCX6R-LMA/LMB(Hoseless)	PCX9R-LMA/LMB(Hoseless)	PC9R-LMA/LMB
Cooling capacity (W)	600	900	900
Cooling capacity (BTU)	2000	3000	3000
Cooling power consumption (W)	410	450	400
humidifying capacity(L/H)	/	/	0.2
Dehumidification (30°C, RH80%) (L / Day)	25	25	25
Air volume (m³/h)	140	140	140
EER	2.5	2.5	2.5
Noise (dBA)	42-46	42-46	42-46
Unit dimensions (mm)	W280xD380xH515	W280xD380xH515	W280xD380xH515
Packing dimensions (mm)	W330x D440xH667	W330x D440xH667	W330xD440xH667
Container Loading (20'/40'/40'HQ)pcs	273/567/749	273/567/749	273/567/749
Net weight (kg)	13.5	15	14.5
Gross weight (kg)	14.7	16.7	15.7

Portable air conditioner PC-12MA

PCX-12MA(Hoseless)



- *Max. Cooling Capacity: 3,000 BTU/H
- *Ultra low power consumption 360W, available to use in outdoor activity with portable battery
- *Touch Pad with LED display (7 segment)
- *Function: Cooling, Dehumidifying, Ventilating
- *Optional: Purifying(HEPA/ Carbon filter)
- *Moist Humidify: 200ml/ Hour
- *24Hour Timer: Auto-On / Auto-Off
- *Powerful dehumidify capacity: 20L~25L/Day
- *User-Friendly Program: Auto/ Lock/ Sleep
- *Could Adapt to Accessory "Window Kits"
- *With big 5L water tank
- *Real Hoseless portable air conditioner , No Hot Air, No Exhaust Hose(Water absorbs heat and evaporates)

Close look



Compressor cooling makes the max. temperature difference at air outlet vent:12°C



2 air outlet ouver.



Exhaust pipe and adapter which makes it with multifunctions:dry clothes, warmshoes,etc.



Low power consumption, 3000BTU only need around 360W when cooling.




With remote control and its location.




Water absorbs heat and evaporates , Hoesless AC got

Standard features

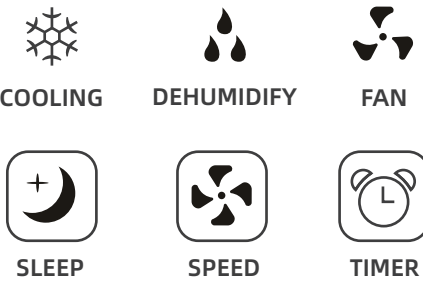

Optional features

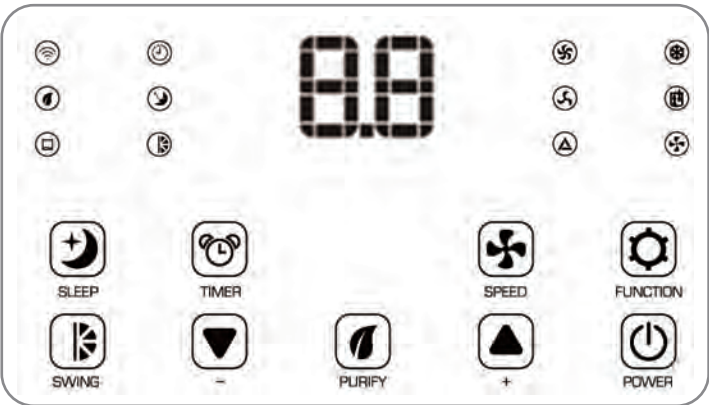

Model	PC6R-12MA	PC9R-12MA	PCX6R-12MA (Hoesless)	PCX9R-12MA (Hoesless)
Control	Soft Touch	Soft Touch	Soft Touch	Soft Touch
Cooling capacity (BTU)	2000	3000	2000	3000
Cooling capacity (W)	600	900	600	900
Cooling power consumption (W)	330	490	280	440
Moisture removed (L/Day)	30	30	30	30
Air Flow (m³/h)	150	150	150	160
Refrigerant	R290	R290	R290	R290
Noise (dBA)	48	52	48	52
EER	2.5	2.5	2.5	2.5
Water tank	5L	5L	5L	5L
Unit dimensions (mm)	W325xD275xH585	W325xD275xH585	W325xD275xH585	W325xD275xH585
Packing dimensions (mm)	W380xD310xH632	W380xD310xH632	W380xD310xH632	W380xD310xH632
Container Loading (20'/40'/40'HQ)pcs	333/696/928pcs	333/696/928pcs	333/696/928pcs	333/696/928pcs
Net weight (kg)	14	14.5	14	14.5
Gross weight (kg)	15	15.5	15	15.5

Portable air conditioner PC-02MA




- *Cooling/ Heating Capacity: 10,500~15,000 BTU/H
- *Simple and classic shape, easy to clean
- *Cooling, (Heating), Dehumidifying, Ventilating
- *Powerful dehumidify capacity: 50L~65L/Day
- *Flexible Humidity Setting (°C or °F available)
- *2 layers of blades, lead the air cooling specific spot
- *3-Step Fan Speed: High-Middle-Low
- *User-Friendly Program: Auto/ Lock/ Sleep
- *24Hour Timer: Auto-On / Auto-Off
- *Self-Evaporating No Draining, No Dripping
- *Exhaust hose storing & packing protection

Close look



Air Outlet

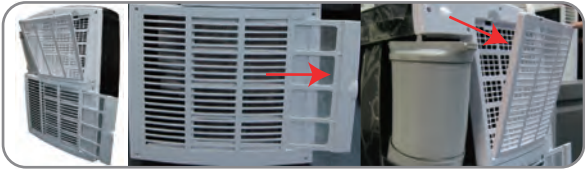

Removable Filters



Built-in Exhaust Hose



Remote Control



Electric Panel



World famous compressor



Self-diagnosis function



Super-quality internal threaded copper pipe

Standard features



COOLING



DEHUMIDIFY




SLEEP



SPEED



TIMER

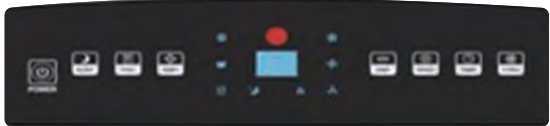

Optional features



HEATING


Model	PC30-02MA	PC35-02MA	PC40-02MA	PC44-02MA
Cooling Capacity (BTU)	11000	12000	14000	15000
Cooling Capacity (W)	3000	3500	4000	4400
Heating Capacity (BTU)optional	12000	12000	14000	15000
Heating Capacity (W)optional	3000	3500	4000	4400
Dehumidification(30°C,RH80%)(L/Day)	50L	60L	70L	75L
Air volume(m3/h)	430	430	430	430
EER	2.6	2.6	2.6	2.5
Refrigerant	R410a	R410a	R410a	R410a
Noise (dBA)	65	65	65	65
Unit Dimensions (mm)	W530*D345*H840	W530*D345*H840	W530*D345*H840	W530*D345*H840
Packing Dimensions (mm)	W580*D395*H880	W580*D395*H880	W580*D395*H880	W580*D395*H880
Container Loading(20'/40'/40'HQ)pcs	114/240/327	114/240/327	114/240/327	114/240/327
Net Weight (kg)	27.5	29.5	31.5	33.5
Gross Weight (kg)	30.5	32.5	34.5	36.5

Portable air conditioner PC-FMA



- *Electronic panel display , Remote control
- * Unique evaporation booster for high efficient cooling
- * 3-speed turbo fan with automatic and sleep mode
- * R410A or R290a green refrigerant for improved cooling
- * Directional louvers
- * 1-24-hour start / stop timer
- * Reverse cycle heating, efficient and easy to convert
- * Cooling, Heating and Dehumidifying, all year round climate control
- * Compact Design, Touch Panel Controls, Water Resistant
- * Great for small Server and Network areas
- * Good for Home, Office, Commercial use
- * Ideal for small to medium sized rooms
- * Intelligent microprocessor for improved energy efficiency

Standard features

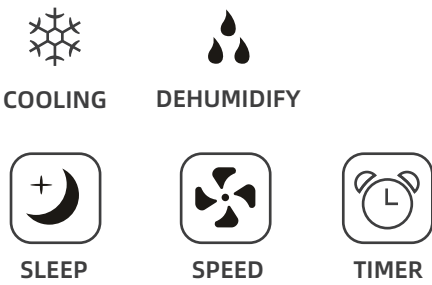

Optional features



Close look



Electric control panel.



With remote control.



With hidden washable filter.



World famous compressor



Self-diagnosis function



Super-quality internal threaded copper pipe

Model	PC26-FMA	PC30-FMA	PC35-FMA	PC40-FMA
Cooling capacity (W)	2600	3000	3500	4000
Cooling capacity (BTU)	9000	10000	12000	14000
Heating capacity (W)	2600	3000	3500	4000
Heating capacity (BTU)	9000	10000	12000	14000
Dehumidification (30°C, RH80%) (L/Day)	50	50	60	70
Air volume (m³/h)	360	360	450	450
EER	2.5	2.5	2.5	2.5
Refrigerant	R410a	R410a	R410a	R410a
Noise (dB)	65	65	65	65
Unit dimensions (mm)	W355*D545.5*H793	W355*D545.5*H793	W355*D545.5*H793	W355*D545.5*H793
Packing dimensions (mm)	W384xD576xH845	W384xD576xH845	W384xD576xH845	W384xD576xH845
Container Loading (20/ 40'/40'HQ)pcs	120/248/372	120/248/372	120/248/372	120/248/372
Net weight (kg)	27.5	28.5	29.5	30.5
Gross weight (kg)	29.5	30.5	31.5	32.5

Portable air conditioner PC-01MA/06MI



01MA



06MI

- *Luxury design
- *Timer setting 0-24 hrs
- *With Remote controller
- *Powerful cooling
- *Self-evaporating system for condensing water and without water tank
- *Pilot lamps
- *Ready-to-operate
- *3 ventilator stages
- *Exhaust air hose can be integrated into the appliance for storage
- *Adjustable air outlet

Close look




Air Outlet



Remote Control



Built-in Exhaust Hose

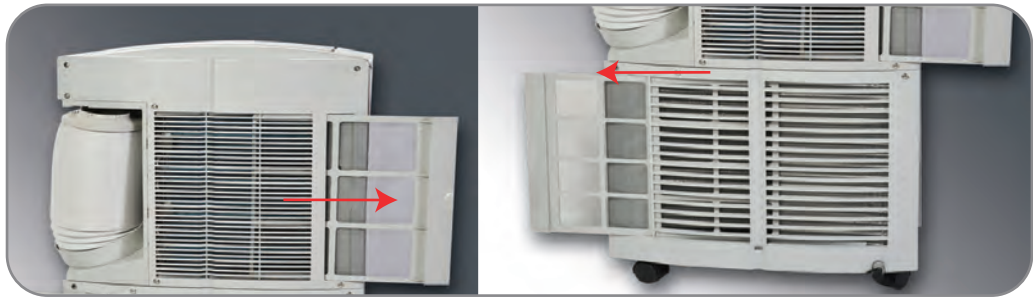


Removable Filters




Electric Panel

Standard features

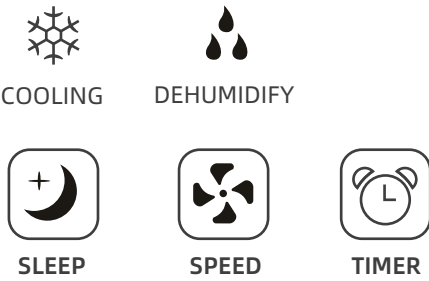

Optional features

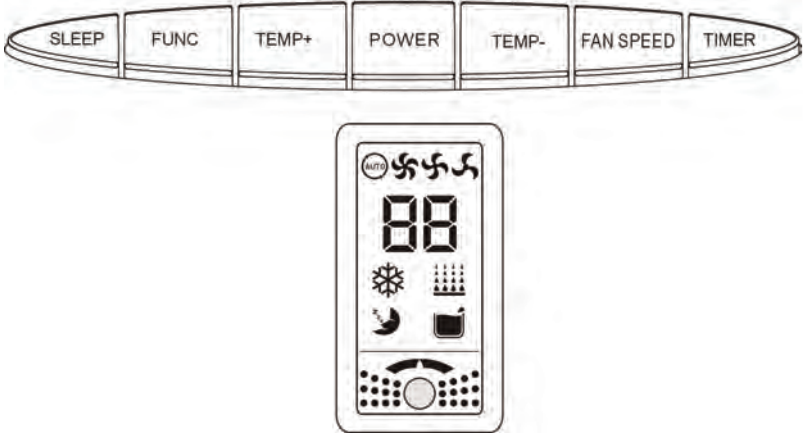

World famous compressor



Self-diagnosis function



Super-quality internal threaded copper pipe

Model	PC26-01MA/06MI	PC30-01MA/06MI	PC35-01MA/06MI	PC40-01MA/06MI
Cooling capacity (W)	2600	3000	3500	4000
Cooling capacity (BTU)	9000	10000	12000	14000
Heating capacity (W)	2600	3000	3500	4000
Heating capacity (BTU)	9000	10000	12000	14000
Dehumidification (30°C, RH80%) (L/Day)	53	54	54	56
Air volume (m³/h)	420	450	450	450
Noise (dBA)	53	54	54	56
Unit dimensions (mm)	476Wx358Dx840H	476Wx358Dx840H	476Wx358Dx840H	476Wx358Dx840H
Packing dimensions (mm)	540Wx417Dx880H	540Wx417Dx880H	540Wx417Dx880H	540Wx417Dx880H
Container Loading (20'FT/40'GP/40'HQ)pcs	110/232/343	110/232/343	110/232/343	110/232/343
Net weight (kg)	28.5	29.5	30.5	31.5
Gross weight (kg)	31.5	32.5	33.5	34.5

Portable air conditioner PC-SMD



- *Electronic panel display , Remote control
- *Unique evaporation booster for high efficient cooling
- *3-speed turbo fan with automatic and sleep mode
- *R410A or R290a green refrigerant for improved cooling
- *Directionallouvers
- *1-24-hour start / stop timer
- *Reverse cycle heating, efficient and easy to convert
- *Cooling, Heating and Dehumidifying, all year round
- *climate control
- *Compact Design, Touch Panel Controls, Water Resistant
- *Great for small Server and Network areas
- *Good for Home, Office, Commercial use
- *Ideal for small to medium sized rooms
- *Intelligent microprocessor for improved energy efficiency

Close look



Air Outlet



Remote Control



Removable Filters




Electric Panel



Built-inExhaust Hose


Standard features

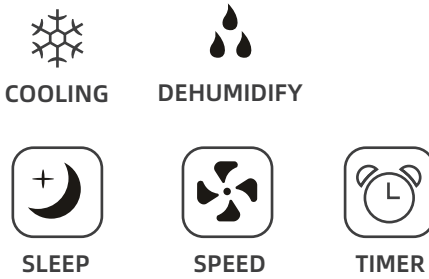

Optional features



HEATING

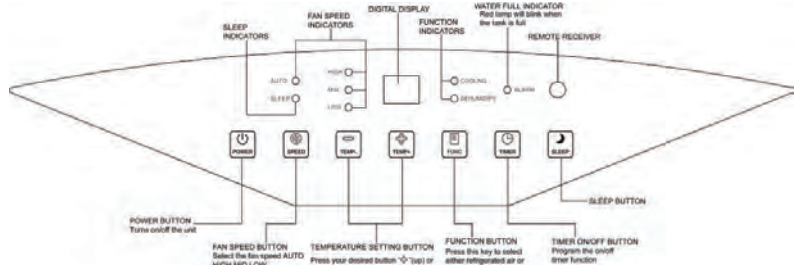

World famous compressor



Self-diagnosis function



Super-quality internal threaded copper pipe


Model (GS/ CE)	PC26R-SMD	PC35R-SMD	PC40R-SMD	PC44R-SMD
Cooling capacity(w)	2600	3500	4000	4400
Cooling capacity (BTU)	9000	12000	14000	15000
Cooling Rated Power(W)	1250	1480	1700	1850
Dehumidification (30°C, RH80%)(L/Day)	32	50	56	60
Air volume (m³/h)	420	420	520	520
Refrigerant	R290/R410A	R290/R410A	R290/R410A	R290/R410A
Noise (dBA)	51	53	56	56
Unit dimensions (mm)	476Wx358Dx790H	476Wx358Dx790H	476Wx358Dx790H	476Wx358Dx790H
Packing dimensions (mm)	540Wx417Dx845H	540Wx417Dx845H	540Wx417Dx845H	540Wx417Dx845H
Container Loading (20'FT/40'GP/40'HQ)pcs	110/232/348	110/232/348	110/232/348	110/232/348
Net weight (kg)	30	31	32	33
Gross weight (kg)	33	34	35	36

Portable air conditioner PC-MMR




- *Cooling capacity: 18000Btu to 240000Btu (5300W-7000W)
- *Cooling, dehumidifying, and fan 3in-1 functions
- *Super cooling and dehumidification functionCondensate water self-evaporation system, no manual drainage, no water tank
- *3 fan speeds
- *Soft-touch keys and luxury LED display
- *With super strong metal housing
- *10-12 meters super strong air supply distanceg
- *Timer setting 0-24 hours
- *Outdoor activities (celebrations wedding banquets opening promotions, etc.), restaurants shopping malls, car 4S stores, restaurants, commercial kitchens, computer rooms,workshops. large tents. and other places where arge water-cooled fans can be used can bereplaced; Where it is not convenient to install cabinet type air conditioners or split airconditioners,they can be used.

Standard features

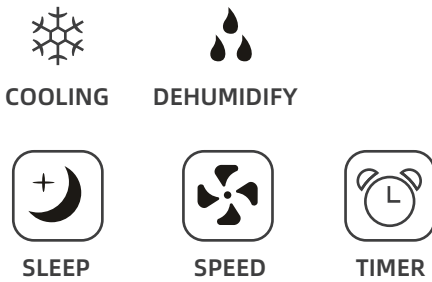

Optional features

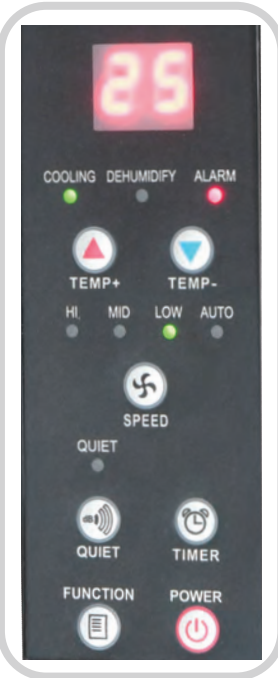

Close look



Model	PC53R-MMR	PC65R-MMR	PC70R-MMR
Cooling Capacity (BTU)	18,000BTU	22,000BTU	24,000BTU
Cooling Capacity (W)	5,300	6,500	7000
Dehumidification (30°C, RH80%) (L/Day)	90L/DAY	120L/DAY	120L/DAY
Noise (dBA)	65 dB	65 dB	65 dB
Refrigerant Type	R290/ R410a	R290/ R410a	R290/ R410a
Net / Gross Weight	71/ 80 kg	74/ 83 kg	76/ 85 kg
Unit Dimensions (mm)	W574 x D708 x H1142	W574 x D708 x H1142	W574 x D708 x H1142
Packing Dimensions (mm)	W623 x D793 x H1300	W623 x D793 x H1300	W623 x D793 x H1300
Container Loading (20'/40'/40'HQ)pcs	25/53/103	25/53/103	25/53/103

*Optional Heating function: add a 4-way valve

Portable air conditioner PC-MMS



- * Cooling capacity: 18000Btu to 240000Btu (5300W-7000W)
- * Cooling, dehumidifying, and fan 3in-1 functions
- * Super cooling and dehumidification functionCondensate water * self-evaporation system, no manual drainage, no water tank
- * 3 fan speeds
- * Soft-touch keys and luxury LED display
- * With super strong metal housing
- * 10-12 meters super strong air supply distanceg
- * Timer setting 0-24 hours
- * Outdoor activities (celebrations wedding banquets opening promotions, etc.), restaurants shopping malls, car 4S stores, restaurants, commercial kitchens, computer rooms,workshops. large tents. and other places where arge water-cooled fans can be used can bereplaced; Where it is not convenient to install cabinet type air conditioners or split airconditioners,they can be used.
- *Exhaust hot air from top, more convenient to place the unit and exhaust hot air. Unnecessary to leave space between unit and wall.

Standard features


COOLING


DEHUMIDIFY


SLEEP


SPEED


TIMER

Optional features


SWING


WIFI


HEATING



Close look

Electronic Panel



Cool Air Outlet



Hose Adapte



2 Hoses Connection



Front



Exhaust hot air from top



Filters



Castors



Model	PC53R-MMS	PC65R-MMS	PC70R-MMS
Cooling Capacity (BTU)	18,000BTU	22,000BTU	24,000BTU
Cooling Capacity (W)	5,300	6,500	7000
Dehumidification (30°C, RH80%) (L/Day)	90L/DAY	120L/DAY	120L/DAY
Noise (dBA)	65 dB	65 dB	65 dB
Refrigerant Type	R290/ R410a	R290/ R410a	R290/ R410a
Net / Gross Weight	71/ 80 kg	74/ 83 kg	76/ 85 kg
Unit Dimensions (mm)	W574 x D708 x H1142	W574 x D708 x H1142	W574 x D708 x H1142
Packing Dimensions (mm)	W623 x D793 x H1300	W623 x D793 x H1300	W623 x D793 x H1300
Container Loading (20'/40'/40'HQ)pcs	25/53/103	25/53/103	25/53/103

*Optional Heating function: add a 4-way valve

Portable air conditioner PC-MMU



- * Cooling capacity: 18000Btu to 24000Btu (5300W-7000W)
- * Cooling, dehumidifying, and fan 3in-1 functions
- * Super cooling and dehumidification functionCondensate water * self-evaporation system, no manual drainage, no water tank
- * 3 fan speeds
- * Soft-touch keys and luxury LED display
- * With super strong metal housing
- * 10-12 meters super strong air supply distance
- * Timer setting 0-24 hours
- * Outdoor activities (celebrations wedding banquets opening promotions, etc,), restaurants shopping malls, car 4S stores, restaurants, commercial kitchens, computer rooms,workshops. large tents. and other places where arge water-cooled fans can be used can bereplaced; Where it is not convenient to install cabinet type air conditioners or split airconditioners,they can be used.
- *Exhaust hot air from top, more convenient to place the unit and exhaust hot air. Unnecessary to leave space between unit and wall.

Standard features


- 
COOLING
- 
DEHUMIDIFY
- 
SLEEP
- 
SPEED
- 
TIMER

Optional features

- 
SWING
- 
WIFI
- 
HEATING



Close look

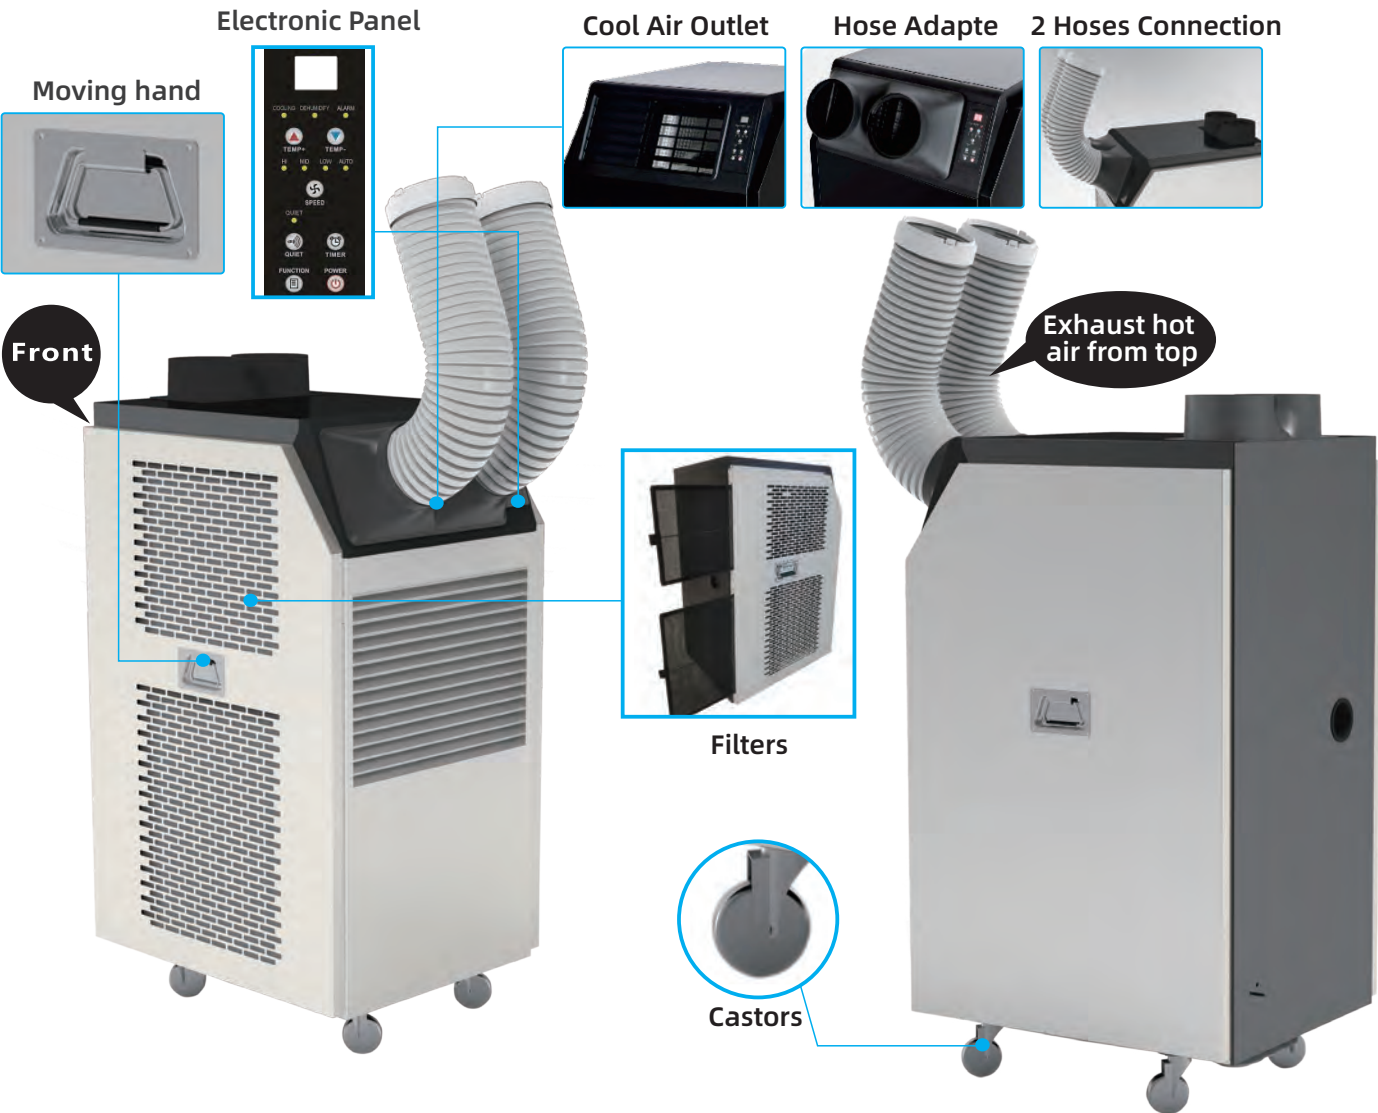

Model	PC53R-MMU	PC65R-MMU	PC70R-MMU
Cooling Capacity (BTU)	18,000BTU	22,000BTU	24,000BTU
Cooling Capacity (W)	5,300	6,500	7000
Dehumidification (30°C, RH80%) (L/Day)	90L/DAY	120L/DAY	120L/DAY
Noise (dBA)	65 dB	65 dB	65 dB
Refrigerant Type	R290/ R410a	R290/ R410a	R290/ R410a
Net / Gross Weight	71/ 80 kg	74/ 83 kg	76/ 85 kg
Unit Dimensions (mm)	W572 x D711 x H1199	W572 x D711 x H1199	W572 x D711 x H1199
Packing Dimensions (mm)	W623 x D793 x H1300	W623 x D793 x H1300	W623 x D793 x H1300
Container Loading (20'/40'/40'HQ)pcs	25/53/103	25/53/103	25/53/103

*Optional Heating function: add a 4-way valve

Portable air conditioner LC65R-01AE



- * Cooling capacity: 18000Btu to 240000Btu (5300W-7000W)
- * Cooling, dehumidifying, and fan 3in-1 functions
- * Super cooling and dehumidification functionCondensate water * self-evaporation system, no manual drainage, no water tank
- * 3 fan speeds
- * Soft-touch keys and luxury LED display
- * With super strong metal housing
- * 10-12 meters super strong air supply distance
- * Timer setting 0-24 hours
- * Outdoor activities (celebrations wedding banquets opening promotions, etc.), restaurants shopping malls, car 4S stores, restaurants, commercial kitchens, computer rooms,workshops. large tents. and other places where arge water-cooled fans can be used can bereplaced; Where it is not convenient to install cabinet type air conditioners or split airconditioners,they can be used.
- *Exhaust hot air from top, more convenient to place the unit and exhaust hot air. Unnecessary to leave space between unit and wall.
- *1-to-multiple rooms cooling and dehumidifying , with 5 cooling air exhasut pipes + 1 hot air exhaust pipe

Standard features


COOLING


DEHUMIDIFY


SLEEP


SPEED


TIMER


Optional features


WIFI


HEATING



Close look

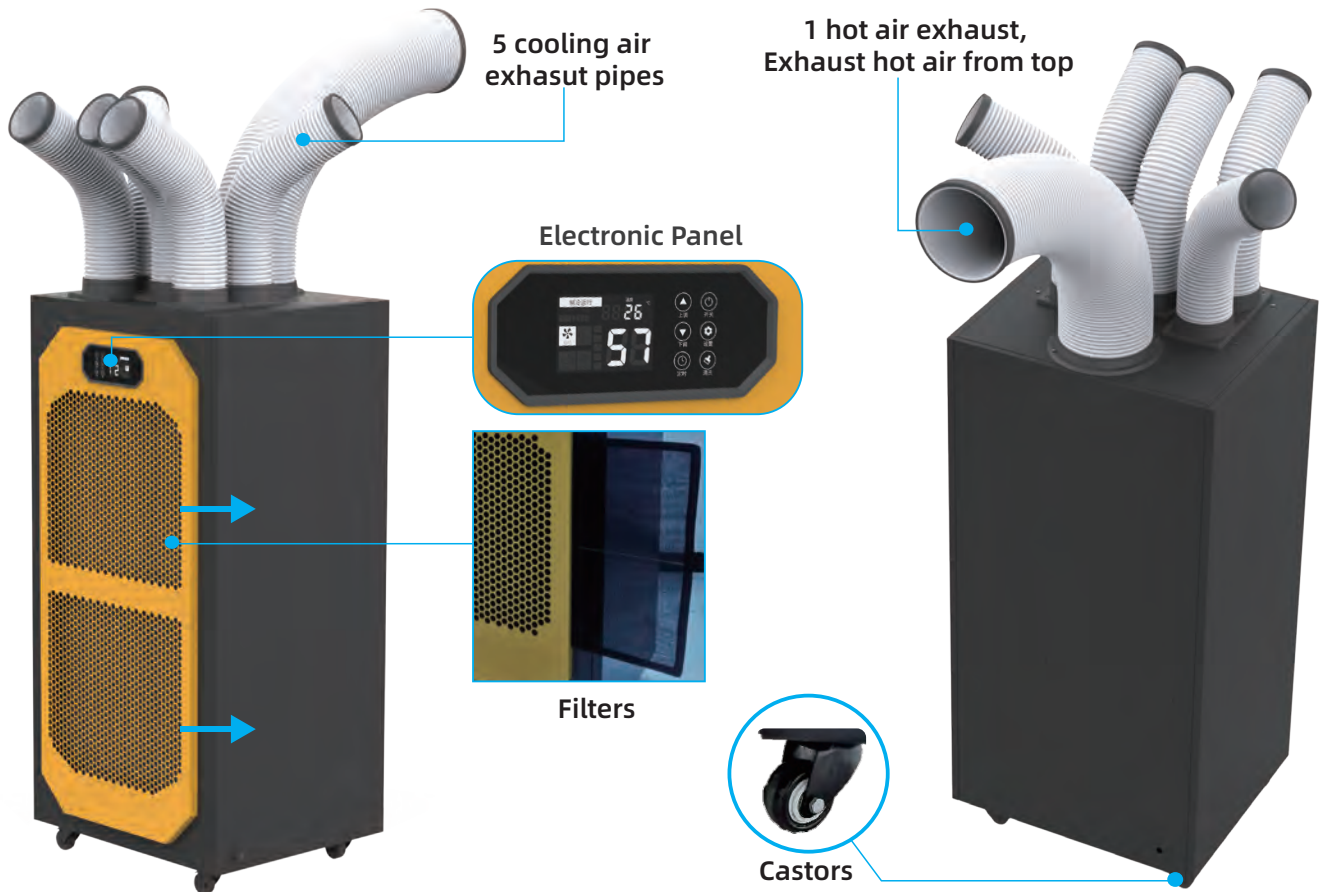

Model (GS/ CE)	LC65R-01AE
Control	Electric
Power source	230V/50Hz
Cooling capacity (W) (35°C/24°C)	6500
Moisture removed (L / Day) (30°C/27.1°C)	120
Air volume (m³/h)	1000
Timer setting	0-24hrs
Color	Matte paint housing
Package (Brown box)	1 unit/ carton box
Unit dimensions (mm) (W*D*H)	630*555*1319
Packing dimensions (mm) (W*D*H)	793*623*1300
Container Loading (20'FT/40'GP/40'HQ)pcs	25/53/103
Net weight (kg)	95
Gross weight (kg)	101



*Optional Heating function: add a 4-way valve

PAC Accessories | Window Kits

The window kit can keep the ambience in good balance of air pressure, and efficiently lead the hot exhaust air out. Various design of window kits for different environment.

TYPE A


Min.: 55cm Max.: 100cm

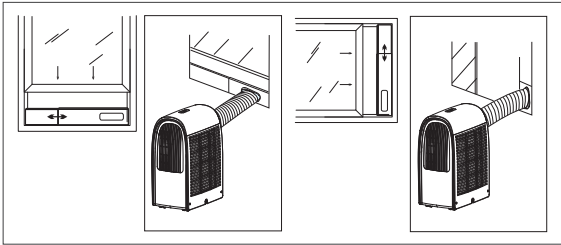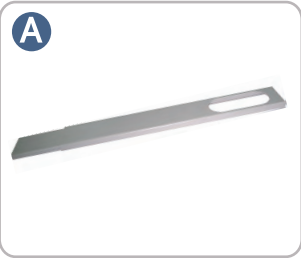

The type A is unnecessary to change structure of the room, just put the Type A window kits with the adjustable sliding pad vertically or horizontally to the window. Find the suitable length and fix the pads with screws, and then fit the window kit set into the widow groove.

TYPE B


Hole Diameter: $\phi 140\text{mm}$ Screw $\phi 4.5\text{mm}$

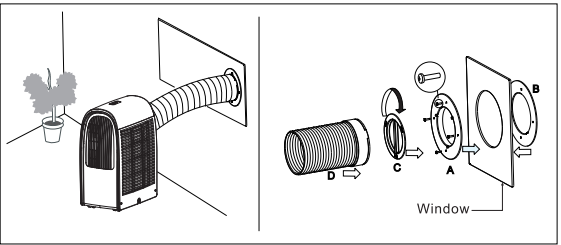

To use Type B window kits, you have to open a hole on window or wall, and fix the inner grille ring & outer ring with screws. Cover the window kit when you remove the unit from window kit, to avoid items enter the ambience.

TYPE D

Hole Diameter: $\phi 158\text{mm}$ Screw $\phi 4.5\text{mm}$

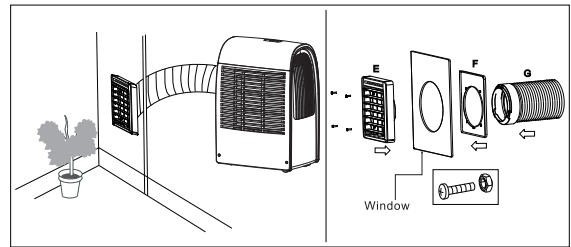

Type D window kits include a red-farad receiver and a controlpad, users could control directly through the unit, the windowkit pad,or the remote controller.

Note