



 YC GROUP


ACHEM

PVC Tape Series



www.achem.com

ACHEM. wonder.

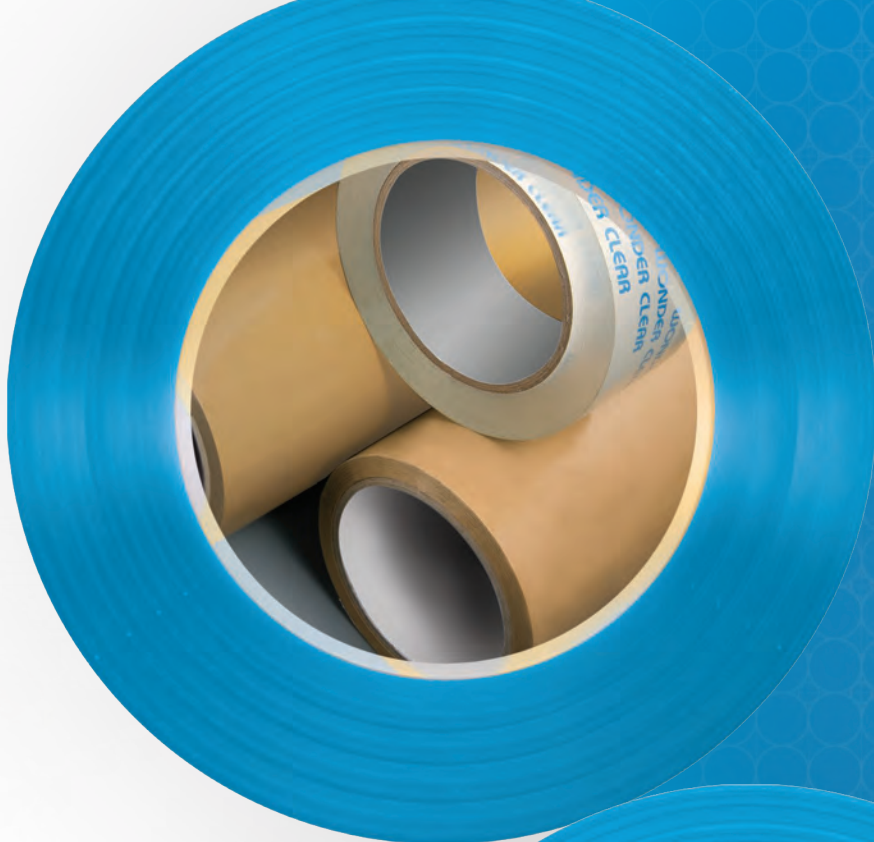

Contents

PVC Tape Series --- P8 ~ P31



PVC Tape Series



Protection Tape
Page 20



Plastering Tape
Page 22



Floor Marking Tape
Page 14



Electrical Tape
Page 8



Automotive Tape
Page 26



Pipe Wrapping Tape
Page 18




Electrical Tape



 Product No.	 Thickness mm(mils)	 Adhesion kg/cm(oz/in)	 Tensile Strength kg/cm(lbs/in)	 Elongation(%)	 Dielectric at Break (Volts./mil)	 Surface Finished	 Weather Resistant	 Flame Retardant	 RoHS	 REACH SVHC	 Certification	 Feature/Application
21AG3	0.115±0.011MM (4.50)	0.160↑(14.02)	1.2↑(6.35)	150↑	1011	Glossy			•			•Extremely flexible, good adhesion. •For wire and cable insulation, bundling and reinforcing. •Assorted colors for color coding of cables.
21A51	0.115±0.012 (4.5±0.5)	0.16↑(14)	1.7↑(9)	150↑	1000	Matte			•			
21900	0.120±0.02 (4.72±0.79)	0.180↑(15.78)	2.00↑(11.00)	150↑	1100	Glossy						
21Z00	0.120±0.02 (4.72±0.79)	0.180↑(15.78)	2.00↑(11.00)	150↑	1000	Matte						
K1900	0.120±0.02 (4.72±0.79)	0.180↑(15.78)	2.00↑(11.00)	150↑	1100	Glossy			•			
K1ZB0	0.120±0.02 (4.72±0.79)	0.185↑(16.31)	2.00↑(11.00)	150↑	1000	Matte		•	•	•	•VDE •IEC60454-3-1-1	
K1ZA0	0.120±0.02 (4.72±0.79)	0.180↑(15.78)	2.00↑(11.00)	150↑	1000	Matte		•	•		•VDE •IEC60454-3-1-1	
21A01	0.125±0.013 (4.9±0.5)	0.16↑(14)	1.9↑(10)	150↑	1000	Matte			•			
21G01	0.125±0.013 (4.9±0.5)	0.16↑(14)	1.9↑(10)	150↑	1000	Glossy			•			
21G11	0.125±0.013 (4.9±0.5)	0.16↑(14)	1.9↑(10)	150↑	1000	Glossy		•	•			

Electrical Tape												
 Product No.	 Thickness mm(mils)	 Adhesion kg/cm(oz/in)	 Tensile Strength kg/cm(lbs/in)	 Elongation(%)	 Dielectric at Break (Volts./mil)	 Surface Finished	 Weather Resistant	 Flame Retardant	 RoHS	 REACH SVHC	 Certification	 Feature/Application
21A33	0.125±0.012 (4.891)	0.18↑(15.78)	1.2↑(6.35)	150↑	1011	Glossy			•			 Feature/Application •Extremely flexible, good adhesion. •For wire and cable insulation, bundling and reinforcing. •Assorted colors for color coding of cables.
21G13	0.125±0.012 (4.891)	0.18↑(15.78)	1.2↑(6.35)	150↑	1011	Glossy		•	•			
21WA0	0.130±0.02 (5.11±0.79)	0.180↑(15.78)	2.00↑(11.00)	150↑	1000	Matte		•			•IEC 60454-3-1-1	
21000	0.150±0.015 (5.90±0.59)	0.180↑(15.78)	2.60↑(14.00)	200↑	1000	Matte	•					
K1XB0	0.150±0.015 (5.90±0.59)	0.180↑(15.78)	2.55↑(14.00)	150↑	1100	Matte		•	•	•	•VDE •IEC 60454-3-1-5	
21501	0.180±0.018 (7.0±0.7)	0.18↑(16)	2.7↑(15)	150↑	1000	Matte		•	•		•UL •CSA	
K1J01	0.180±0.018 (7.0±0.7)	0.18↑(16)	2.7↑(15)	200↑	1000	Matte	•	•	•	•	•UL •CSA	
21K21	0.180±0.018 (7.0±0.7)	0.18↑(16)	2.7↑(15)	250↑	1000	Matte	•	•	•	•	•UL •CSA	
21103	0.178±0.017 (6.964)	0.180↑(15.78)	2.5↑(13.24)	200↑	1011	Matte			•			
218N0	0.180±0.018 (7.00±0.71)	0.130↑(11.60)	2.60↑(14.00)	200↑	1000	Glossy	•	•			•CSA	
21100	0.180±0.018 (7.00±0.71)	0.180↑(15.78)	2.60↑(14.00)	200↑	1000	Matte					•UL	
211A0	0.180±0.018 (7.00±0.71)	0.180↑(15.78)	2.60↑(14.00)	200↑	1000	Matte		•			•UL	
218M0	0.180±0.018 (7.00±0.71)	0.180↑(15.78)	2.60↑(14.00)	200↑	1000	Glossy					•UL	

Electrical Tape												
 Product No.	 Thickness mm(mils)	 Adhesion kg/cm(oz/in)	 Tensile Strength kg/cm(lbs/in)	 Elongation(%)	 Dielectric at Break (Volts./mil)	 Surface Finished	 Weather Resistant	 Flame Retardant	 RoHS	 REACH SVHC	 Certification	 Feature/Application
211N0	0.180±0.018 (7.00±0.71)	0.180↑(15.78)	2.60↑(14.00)	200↑	1000	Matte	●	●			•UL •CSA	•Premium grade tape. •Extremely flexible, good adhesion. For wire and cable insulation, bundling and reinforcing. •Assorted colors for color coding of cables.
XK18A	0.180±0.018 (7.00±0.70)	0.180↑(15.78)	2.60↑(14.00)	150↑	1000	Matte	●	●	●	●	•IEC 60454-3-1-6 •REACH	•Extremely flexible, good adhesion. •For wire and cable insulation, bundling and reinforcing. •Assorted colors for color coding of cables.
K11G0	0.180±0.018 (7.00±0.71)	0.210↑(18.6)	2.60↑(14.00)	200↑	1000	Glossy	●	●	●		•UL •CSA	•Extremely flexible, good adhesion. •For wire and cable insulation, bundling and reinforcing. •Assorted colors for color coding of cables. •Pass UL 94 burning test VTM-0.
K11M0	0.180±0.018 (7.00±0.71)	0.180↑(15.78)	2.60↑(14.00)	200↑	1000	Matte	●	●	●	●	•UL •CSA •-18°C to 105°C	•Premium grade tape. •Extremely flexible, good adhesion. •For wire and cable insulation, bundling and reinforcing.
K11N0	0.180±0.018 (7.00±0.71)	0.180↑(15.78)	2.60↑(14.00)	200↑	1000	Matte	●	●	●		•UL •CSA •-18°C to 105°C	•Assorted colors for color coding of cables. •Pass FMVSS302.
K11A0	0.180±0.018 (7.00±0.71)	0.180↑(15.78)	2.60↑(14.00)	--	1000	Matte		●	●		•UL	•Extremely flexible, good adhesion. •For wire and cable insulation, bundling and reinforcing. •Assorted colors for color coding of cables.
K1100	0.180±0.018 (7.00±0.71)	0.180↑(15.78)	2.60↑(14.00)	200↑	1000	Matte			●		•UL	
XK18B	0.190±0.019 (7.50±0.75)	0.180↑(15.78)	2.70↑(14.7)	150↑	1000	Matte	●	●	●	●	•IEC 60454-3-6 •REACH	
212A0	0.200±0.02 (8.00±0.020)	0.180↑(15.78)	3.10↑(17.60)	200↑	1000	Matte		●			•UL	
21400	0.200±0.02 (8.00±0.020)	0.130↑(11.60)	3.10↑(17.60)	200↑	1000	Glossy						
K1450	0.200±0.02 (8.00±0.79)	0.160↑(14.40)	1.85~3.40 (10.35~19.16)	100~300	1000	Glossy	●	●	●	●	•JIS	
K1GC0	0.210±0.02 (8.27±0.79)	0.110↑(9.90)	3.20↑(17.90)	200↑	1000	Matte	●	●	●			
K1GB0	0.220±0.022 (8.66±0.87)	0.210↑(18.6)	3.10↑(17.60)	200↑	900	Matte	●	●	●		•UL •CSA •-18°C to 105°C	
K1QB0	0.220±0.022 (8.66±0.87)	0.210↑(18.6)	3.10↑(17.60)	200↑	900	Glossy	●	●	●		•UL •CSA •-18°C to 105°C	

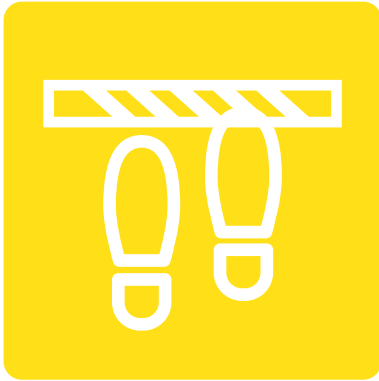


Floor Marking Tape




 Product No.	 Thickness mm(mils)	 Adhesion kg/cm(oz/in)	 Tensile Strength kg/cm(lbs/in)	 Elongation(%)	 Feature/Application
41W00	0.130±0.013(5.1±0.51)	0.16↑(14.11)	2.0↑(11.00)	150↑	•It is designed for industrial identification, color coding, lane mark and bundling. •Matte finished.
41W03	0.130±0.013(5.1±0.51)	0.20↑(17.640)	1.6↑(14.000)	150↑	It is designed for floor or aisle marking and pipe wrapping.
X1M03	0.150±0.015(5.9±0.59)	0.14↑(12.401)	1.8↑(10.000)	175↑	•It is designed for industrial identification, color coding, lane mark and bundling. •Glossy finished.
X1003	0.150±0.015(5.9±0.59)	0.14↑(12.401)	1.8↑(10.000)	175↑	
41061	0.135±0.013(5.3±0.5)	0.16↑(14)	2.0↑(11)	150↑	•It is designed for industrial identification, color coding, lane mark and bundling. •Glossy finished, easy unwind.
41N51	0.135±0.013(5.3±0.5)	0.16↑(14)	2.0↑(11)	150↑	•Hazard warning. •Duo colors available.
41050	0.140±0.014(5.50±0.55)	0.14↑(12.40)	2.6↑(14.00)	150↑	•It is designed for industrial identification, color coding, lane mark and bundling. •Glossy finished, easy unwind.
41000	0.150±0.015(5.90±0.59)	0.20↑(17.64)	2.6↑(14.00)	180↑	•It is designed for industrial identification, color coding, lane mark and bundling. •Glossy finished. •Duo colors available.
41900	0.150±0.015(5.90±0.59)	0.20↑(17.64)	2.6↑(14.00)	150↑	•It is designed for industrial identification, color coding, lane mark and bundling. •Matte finished.

Floor Marking Tape					
 Product No.	 Thickness mm(mils)	 Adhesion kg/cm(oz/in)	 Tensile Strength kg/cm(lbs/in)	 Elongation(%)	 Feature/Application
41933	0.150±0.015(5.90±0.59)	0.20(17.64)	1.8↑(10.00)	175↑	It is designed for floor or aisle marking and pipe wrapping.
41N00	0.160±0.017(6.60±0.67)	0.13↑(11.30)	2.60↑(14.00)	200↑	•It is designed for industrial identification, color coding, lane mark and bundling. •Glossy finished. •Duo colors.
41110	0.160±0.016(6.60±0.63)	0.20↑(17.64)	3.10↑(17.60)	150↑	•Laminated version with duo colors printing: white/red, white/green and yellow/black. •It is designed for industrial identification, color coding, lane mark and bundling. •Glossy finished.
41131	0.160±0.016(6.3±0.6)	0.16↑(14)	2.4↑(13)	150↑	•It is designed for industrial identification, color coding, lane mark and bundling. •Glossy finished.
41N41	0.160±0.016(6.3±0.6)	0.16↑(14)	2.4↑(13)	150↑	•Hazard warning. •Duo colors available.
X1M63	0.170±0.017(7.012±0.701)	0.20↑(17.64)	2.80↑(18.95)	200↑	•It is designed for industrial identification, color coding, lane mark and bundling. •Glossy finished. •Duo colors.
41V00	0.230±0.023(9.10±0.91)	0.24↑(21.16)	5.91↑(33.04)	200↑	•Laminated version with duo colors printing: white/red, white/green and yellow/black. •It is designed for industrial identification, color coding, lane mark and bundling. •Glossy finished.

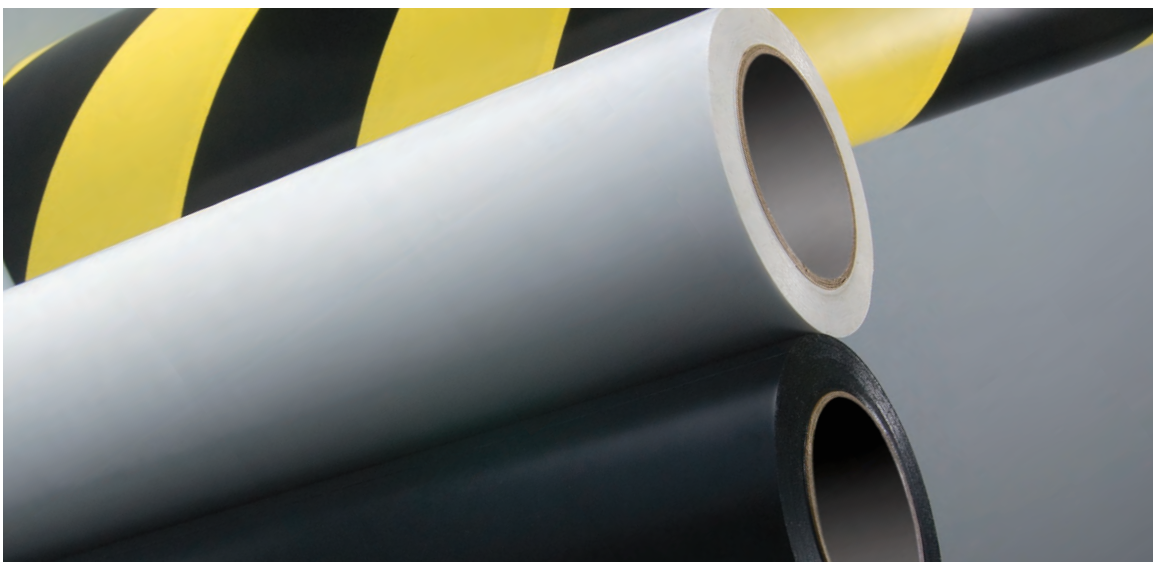



Pipe Wrapping Tape

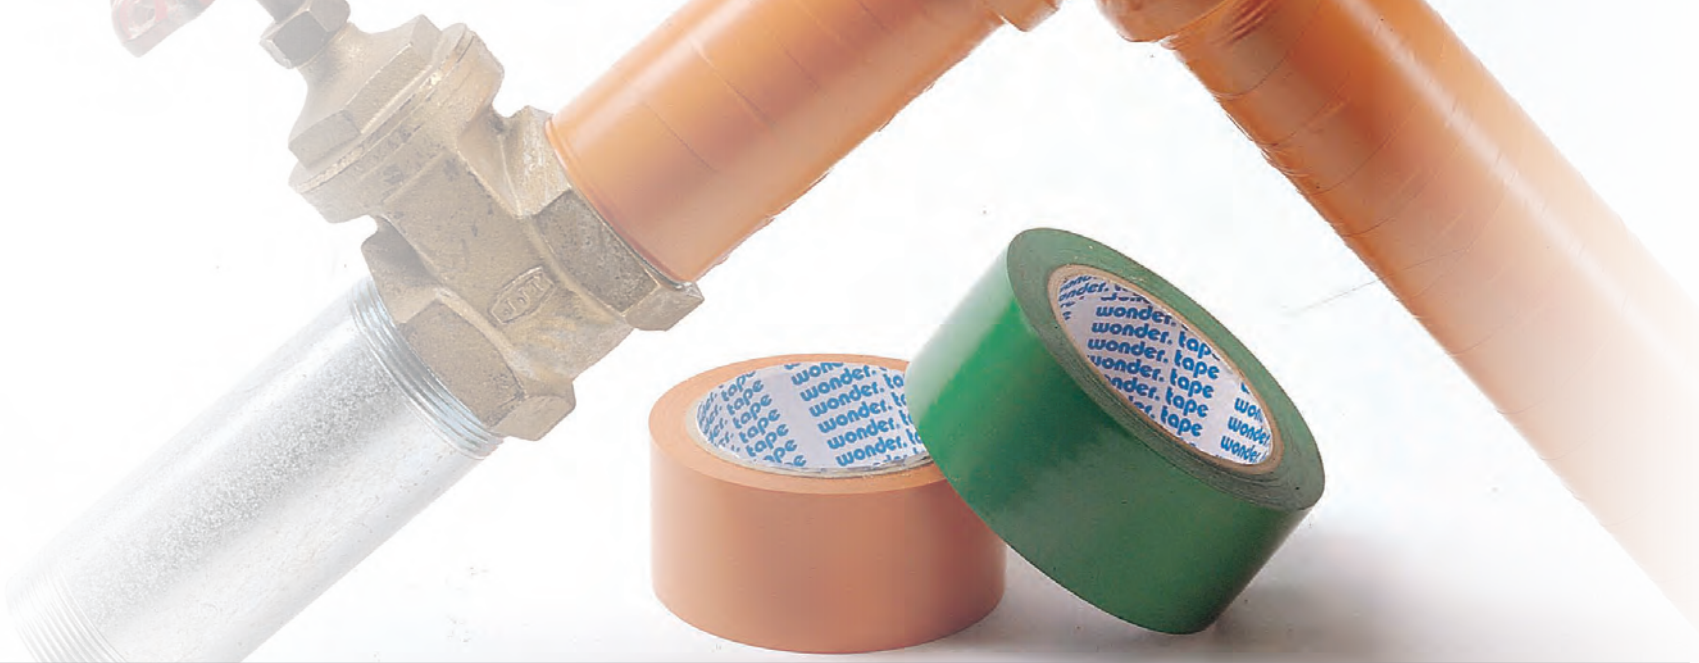

 Product No.	 Thickness mm(mils)	 Adhesion kg/cm(oz/in)	 Tensile Strength kg/cm(lbs/in)	 Elongation(%)	 Feature/Application
41811	0.130±0.013(5.1±0.5)	0.16↑(14)	2.0↑(11)	150↑	•Suitable for industrial purpose; Watertight,moisture-resistant, good for duct sealing, reinforcing, mending and other applications. •Glossy finished.
418A1	0.130±0.013(5.1±0.5)	0.16↑(14)	2.0↑(11)	150↑	•Suitable for industrial purpose; Watertight,moisture-resistant, good for duct sealing, reinforcing, mending and other applications. •Glossy finished. •Flame retardant.
41800	0.130±0.020(5.11±0.79)	0.160↑(14.11)	2.00↑(11.00)	200↑	•Suitable for industrial purpose; Watertight,moisture-resistant, good for duct sealing, reinforcing, mending and other applications. • Glossy finished.
41100	0.160±0.016(6.60±0.63)	0.160↑(14.11)	2.60↑(14.00)	200↑	
41700	0.170±0.017(6.69±0.67)	0.200↑(17.64)	2.00↑(11.00)	100↑	•Suitable for industrial purpose; Watertight,moisture-resistant, good for duct sealing, reinforcing, mending and other applications. •Embossed.
11433	0.170±0.017(6.69±0.67)	0.130↑(11.466)	2.000↑(10.588)	175↑	•Suitable for industrial purpose; Watertight,moisture-resistant, good for duct sealing, reinforcing, mending and other applications. •Embossed. •ROHS1.0
41200	0.200±0.020(8.00±0.79)	0.160↑(14.11)	3.10↑(17.60)	200↑	•Suitable for industrial purpose; Watertight,moisture-resistant, good for duct sealing, reinforcing, mending and other applications. •Matte finished.
41300	0.250±0.025(10.00±0.98)	0.180↑(15.87)	3.50↑(19.80)	150↑	•UPC/IAPMO listed, heavy duty pipe wrapping, moisture resistant, anti-corrosive. •Matte Finished.
41500	0.500±0.050(20.00±1.97)	0.180↑(15.87)	7.20↑(40.0)	150↑	
XV151	0.500±0.050(20.00±1.97)	0.180↑(15.87)	7.20↑(40.0)	150↑	•Suitable for industrial purpose; Watertight,moisture-resistant, good for duct sealing, reinforcing, mending and other applications. •REACH SVHC/RoHS compliance.




Protection Tape




 Product No.	 Thickness mm(mils)	 Adhesion kg/cm(oz/in)	 Tensile Strength kg/cm(lbs/in)	 Elongation(%)	 Feature/Applicvtion
51801	0.110±0.011(4.3±0.4)	0.16↑(14)	1.8↑(10)	150↑	•Medium tack. •Protecting aluminum or plastic window.
51811	0.115±0.012(4.5±0.5)	0.16↑(14)	1.8↑(10)	150↑	
51800	0.120±0.020(4.70±0.79)	0.08~0.14(7.05~13.30)	2.00↑(11.00)	150↑	Medium tack surface protection for general materials like metal/aluminum/plastic/ wooden window frame.
518S0	0.130±0.013(5.11±0.51)	0.120↑(10.50)	2.10↑(11.50)	180↑	•Easy unwind. •Surface protection for general materials like metal/aluminum/plastic/wooden window frame.
W18S0	0.130±0.013(5.11±0.51)	0.120↑(10.50)	2.10↑(11.50)	180↑	•Easy unwind. •Surface protection for general materials like metal/aluminum/plastic/wooden window frame.
51CA0	0.150±0.015(5.90±0.59)	0.100~0.180(8.80~15.80)	2.00↑(11.00)	200↑	•Surface protection for general materials like metal/aluminum/plastic/wooden window frame. •Printable.



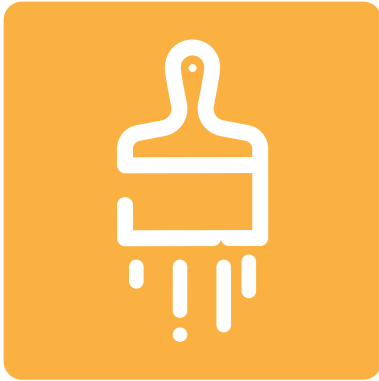

Plastering Tape

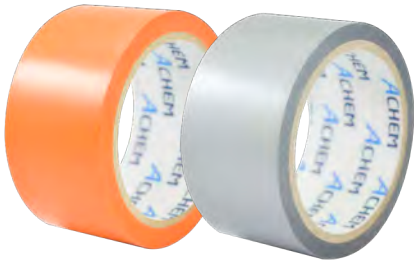

PVC Plastering Tape							
 Product No.	 Thickness mm(mils)	 Adhesion kg/cm(oz/in)	 Tensile Strength kg/cm(lbs/in)	 Elongation(%)	 Unwinding Force (g/25mm)	 Feature/Application	 Remark
W18Y0	0.120±0.012(4.70±0.47)	0.120↑(10.50)	2.10↑(11.50)	180↑	300~900	•Weather resistance. •RoHS & REACH compliance. •Easy-unwind protective tape. •Limited UV resistance. •Ideal for masking aluminum UPVC, painted wooden window and door frames.	REACH
XW19S	0.120±0.012(4.70±0.47)	0.120↑(10.60)	2.00↑(11.00)	150↑	50~450	•Premium grade. •Weather resistance. •RoHS & REACH SVHC compliance. •High tack protective tape. •Limited UV resistance. •Ideal for masking aluminum UPVC, painted wooden window and door frames.	REACH SVHC
K18G3	0.120±0.012(4.702±0.470)	0.120↑(10.501)	2.100↑(11.503)	180↑	300~1125	•Ideal for masking aluminum UPVC and painted wooden window and door frames. •REACH SVHC.	
W18G0	0.130±0.020(5.10±0.79)	0.144↑(12.70)	2.00↑(11.00)	180↑	--	•Weather resistance. •RoHS & REACH SVHC compliance. •High tack protective tape. •Limited UV resistance. •Ideal for masking aluminum UPVC, painted wooden window and door frames.	REACH SVHC
61G10	0.140±20(5.51±0.79)	(Green side) 0.28(24.67) (White side) 0.16~0.31(14.10~28.19)	2.00↑(11.00)	100↑	--	Professional duoband tape.	REACH SVHC
51H03	0.150±0.028(5.902±1.18)	0.100↑(8.810)	1.602↑(9.050)	110↑	300~1125	•Embossed, easy-tear. •Ideal for masking aluminum UPVC and painted wooden window and door frames.	EASY TEAR
51CA0	0.150±0.015(5.90±0.59)	0.100~0.180(8.80~15.80)	2.00↑(11.00)	200↑	--	•Printable & high tack protective tape. •Used to protect aluminum board surface during manufacturing process. Ideal for protecting aluminum or plastic windows.	REACH SVHC

PVC Plastering Tape							
 Product No.	 Thickness mm(mils)	 Adhesion kg/cm(oz/in)	 Tensile Strength kg/cm(lbs/in)	 Elongation(%)	 Unwinding Force (g/25mm)	 Feature/Application	 Remark
51H20	0.150±0.03(5.90±1.18)	0.100↑(8.80)	1.60↑(8.80)	110↑	--	•Embossed easy tear protective tape. •Weather resistance. •RoHS & REACH SVHC compliance. •Limited UV resistance. •Ideal for masking aluminum UPVC, painted wooden window and door frames.	REACH SVHC, EASY TEAR
11411	0.150±0.015(5.9±0.59)	0.16↑(14)	1.8↑(10)	100↑	--	Bundling and paint masking(wooden or aluminum door & window frame).	EASY TEAR

PE Plastering Tape									
 Product No.	 Thickness mm(mils)	 Adhesion kg/cm(oz/in)	 Tensile Strength kg/cm(lbs/in)(MD)	 Elongation(%) (MD)	 Tensile Strength kg/cm(lbs/in)(CD)	 Elongation(%) (CD)	 Unwinding Force (g/25mm)	 Feature/Application	 Remark
X5786	85±5(3.35±0.19)	0.18↑(15.87)	0.98↑(5.51)	200↑	0.79↑(4.41)	350↑	--	•Easy tear. •This tape is remains resistant to UV-rays. •This tape is ideal for delicate surfaces.	EASY TEAR
X5702	95±5(3.75±0.19)	0.24↑(21.16)	0.98↑(5.51)	200↑	0.79↑(4.41)	350↑	--		EASY TEAR





Automotive



Wire Harness Tape

 Product No.	 Thickness mm(mils)	 Adhesion kg/cm(oz/in)	 Tensile Strength kg/cm(lbs/in)	 Elongation(%)	 Unwinding Force (g/25mm)	 Dielectric at Break (Volts./mil)	 Application Temp (°C)	 Feature/Application
ZK17A	0.090±0.01 (3.5±0.35)	0.105↑(9.29)	1.9↑(10.50)	150↑	520↑	1000↑	--	•Soft and flexible, good workability on automotive wiring harness. •Meets VW 60360-1-5.5. •FMVSS302 Passed. •REACH/RoHS Compliance.
ZK1TB	0.100±0.01 (3.9±0.39)	0.095↑(8.40)	1.4↑(7.74)	150↑	530↑	1000↑	--	•Flame retardant. •REACH and RoHS Compliance. •Soft and flexible, good workability on automotive wiring harness.
ZK1TC	0.100±0.01 (3.9±0.39)	0.095↑(8.40)	1.4↑(7.74)	150↑	290~680	1000↑	85°C	
ZK1TD	0.100±0.01 (3.9±0.39)	0.068↑(6.01)	1.4↑(7.74)	150↑	200↑	1000↑	85°C	
21L61	0.100±0.010 (3.9±0.4)	0.12↑(10)	1.4↑(8)	150↑	--	1000↑	80°C	•Flame retardant. •RoHS Compliance. •Soft and flexible, good workability on automotive wiring harness.
21L91	0.100±0.010 (3.9±0.4)	0.12↑(10)	1.4↑(8)	150↑	--	1000↑	80°C	
21LB1	0.100±0.010 (3.9±0.4)	0.16↑(14)	1.4↑(8)	150↑	500↑	1000↑	80°C	•Flame retardant. Heavy duty. •RoHS Compliance. •Soft and flexible, good workability on automotive wiring harness.
ZK1TA	0.100±0.01 (3.9±0.39)	0.105↑(9.29)	2.2↑(12.17)	150↑	520↑	1000↑	125°C	•Soft and flexible, good workability on automotive wiring harness. •Meets VW 60360-1-5.5. •FMVSS302 Passed. •REACH/RoHS Compliance.
21Y83	0.100±0.01 (3.9±0.39)	0.095↑(8.400)	1.400↑(7.508)	150↑	300↑	1011↑	80°C	•Flame retardant. •Soft and flexible, good workability on automotive wiring harness. •REACH/RoHS Compliance.

Wire Harness Tape								
 Product No.	 Thickness mm(mils)	 Adhesion kg/cm(oz/in)	 Tensile Strength kg/cm(lbs/in)	 Elongation(%)	 Unwinding Force (g/25mm)	 Dielectric at Break (Volts./mil)	 Application Temp (°C)	 Feature/Application
K1L13	0.115±0.011 (4.50)	0.12(10.67)	1.4↑(7.41)	150↑	450↑	1011↑	80°C	•Flame retardant. •Soft and flexible, good workability on automotive wiring harness. •REACH/RoHS Compliance.
21Y01	0.115±0.012 (4.5±0.5)	0.16(14)	1.4↑(8)	150↑	--	1000↑	80°C	•Flame retardant. •RoHS1.0 Compliance. •Soft and flexible, good workability on automotive wiring harness.
21L13	0.115±0.011 (4.50)	0.16(14.02)	1.4↑(7.41)	150↑	590↑	1011↑	80°C	•Flame retardant. Heavy duty. •RoHS Compliance. •Soft and flexible, good workability on automotive wiring harness.
21Y21	0.115±0.012 (4.5±0.5)	0.18(16)	1.4↑(8)	150↑	--	1000↑	105°C	•Flame retardant. •RoHS Compliance. •Soft and flexible, good workability on automotive wiring harness.
21Y41	0.115±0.012 (4.5±0.5)	0.18(16)	1.4↑(8)	150↑	--	1000↑	136°C	
21Y51	0.120±0.012 (4.7±0.5)	0.16(14)	1.6↑(9)	150↑	--	1000↑	80°C	
ZK1ZB	0.125±0.01 (4.9±0.49)	0.105↑(9.29)	2.6↑(14.38)	150↑	520↑	1000↑	125°C	•Soft and flexible, good workability on automotive wiring harness. •Meets VW 60360-1-5.5. •FMVSS302 Passed. REACH/RoHS Compliance.
21Y33	0.125±0.012 (4.89)	0.16(14.02)	1.4↑(7.41)	175↑	590↑	1011↑	136°C	•Flame retardant. •RoHS1.0 Compliance. •Soft and flexible, good workability on automotive wiring harness.
21Y23	0.125±0.012 (4.89)	0.16(14.023)	1.4↑(7.41)	175↑	590↑	1011↑	105°C	
21563	0.165±0.017 (6.765±0.676)	0.18(15.78)	2.4↑(12.7)	175↑	590↑	1011↑	80°C	





PET-NON Woven Wire Harness

 Product No.	 Thickness mm(mils)	 Adhesion kg/cm(oz/in)	 Tensile Strength kg/cm(lbs/in)	 Elongation(%)	 Unwinding Force (g/25mm)	 Dielectric at Break (Volts./mil)	 Application Temp (°C)	 Feature/Application	 Remark
K5A00	0.18±0.02 (7.09±0.79)	0.263↑(23.27)	6↑(33.18)	20↑	--	--	105°C	•Low odor, low fogging and low VOCs emission. •Excellent anti-abrasion properties and flame resistance. •Easy tear. •Wire harness bundling in the passenger compartment of an automobile.	Meet LV-312 VW60360-1 standard
K5AZ0	0.25±0.05 (9.84±1.97)	0.263↑(23.27)	6↑(33.18)	20↑	--	--	150°C	•Extreme low VOCs ` high temperature resistance. •Excellent aging resistance and stable against rotting. •Wire harness bundling in high temperature area like engine compartment.	Meet LV-312 VW60360-1 standard
K5100	0.28±0.04 (11.02±1.57)	0.263↑(23.27)	4↑(22.12)	17↑	--	--	105°C	•Low odor, low fogging and low VOCs emission. •Excellent sound dampening, anti-abrasion properties and flame resistance. •Easy tear / Wire harness bundling in the passenger compartment of an automobile.	Meet LV-312 VW60360-1 standard
K51Z0	0.30±0.05 (11.81±1.97)	0.158↑(13.98)	4↑(22.12)	17↑	--	--	125°C	•Extreme low VOCs ` high temperature resistance. •Easy tear. •Wire harness bundling in the passenger compartment of an automobile.	Meet LV-312 VW60360-1 standard

Fine Line

 Product No.	 Thickness mm(mils)	 Adhesion kg/cm(oz/in)	 Tensile Strength kg/cm(lbs/in)	 Elongation(%)	 Unwinding Force (g/25mm)	 Dielectric at Break (Volts./mil)	 Application Temp (°C)	 Feature/Application
X3981	0.120±0.012 (4.7±0.5)	0.16(14)	1.4(8)	120	--	--	150°C	•Easy tear PVC film. •Used for painting masking especially for arc curve color division. •Temperature resistance of up to 150°C*1 hour.
X3931	0.120±0.012 (4.7±0.5)	0.16(14)	1.4(8)	150	--	--	150°C	•Flexible PVC film. •Used for painting masking especially for arc curve color division. •Temperature resistance of up to 150°C*1 hour.