



Manufacturer: Yongkang Yuhaolang Industry and Trade CO., LTD
Web: <https://chinazhengtu.com/>

 Address: No. 37 Huahai Road, Chengxi District, Yongkang City, Zhejiang Province
 Phone: +4000-200-999
 Headquarters: Jincheng Building, Yongkang City, Zhejiang Province, China
 Email: lixinhao3@chinazhengtu.com

Note: The above products are for promotional purposes only. Our company reserves the right to change product parameters and other information at any time. The data comes from the laboratory and there are some errors. Refer to the actual product.

NEW

HIGH END PRODUCT BROCHURE

Yongkang Yuhaolang Industry and Trade CO., LTD



CORPORATE HONORS



With years of deep cultivation in the industry, the company has forged ahead with honors, successively winning authoritative accolades such as High-tech Enterprise, Specialized, Refined, Differential, Innovative Enterprise, and AAA Credit Enterprise, which demonstrate its comprehensive strength and industry reputation. Adhering strictly to international standards, the company has smoothly passed system certifications including ISO9001, 3C, CE, and FCC, as well as multiple product-specific certifications, ensuring quality delivery through standardized management. Driven by persistent innovation, it has accumulated hundreds of patent grants with independent and controllable core technologies. By consolidating its development foundation with intellectual property rights, the company provides customers with more reliable and competitive products and services.

ABOUT

About Us / Company Introduction

Yongkang Yuhaolang Industry and Trade CO., LTD. is a comprehensive enterprise integrating R&D, design, production and sales. Located in Zhejiang Yongkang, a global high-tech hub, the company covers a total area of 22,000 square meters and is equipped with advanced modern production equipment.

The company focuses on the R&D, production and sales of high-quality products including vacuum cleaners, car washers, car-mounted vacuum cleaners and inflators. Our products are widely used in homes, cars, car wash shops, factories and various scenarios, and have won the trust and praise of a large number of customers.

Boasting a technical R&D team with superb professionalism, we keep innovating and launching new products to provide customers with more high-quality products and services. We have introduced a series of internationally advanced production equipment and technologies, and established cooperative partnerships with many domestic and foreign enterprises, thereby continuously improving our production capacity and product quality.

The company strictly implements production and management in accordance with the ISO9001 quality management system, ensuring that every product reaches the international advanced level. Our products have obtained multiple intellectual property rights and passed authoritative certifications such as ETL, CE, GS, EMC and CCC. As a leading enterprise in the industry, we have been committed to the continuous innovation of products and services, adhering to the craftsmanship spirit, improving product quality, enhancing enterprise competitiveness, and promoting social progress.

The company has been dedicated to providing customers with high-quality products and services to meet their ever-changing needs. Our sales network covers more than 60 countries and regions worldwide. Our products are well-received in European countries including Germany, Italy, Poland, the UK, France, Portugal and Russia; in Asian regions including Japan, Vietnam, Malaysia and the Middle East; as well as in North America and Africa, enjoying high reputation and customer feedback. We look forward to your visit and cooperation.

10+ years

Production experience
across online and
offline channels

22000 +m²

Total area of the factory site

100+

Professional
technical personnel

OUR FACTORY



We are a comprehensive enterprise integrating R&D, design, production and sales. Located in Yongkang, Zhejiang — the global hardware technology hub of China, the company covers a total area of 22,000 square meters and is equipped with advanced and modern production equipment.



This is a highly automated production environment dedicated to the injection molding of plastic products. Our streamlined process covers raw material heating, injection molding, cooling, demolding, and precision edge trimming, ensuring efficient and consistent output.



The workshop is a vibrant and efficient hub, serving as the core link in product manufacturing. Boasting a well-organized on-site layout, all equipment and machinery are arranged in a logical sequence aligned with production steps, ensuring smooth and efficient operations.



This section is dedicated to battery aging tests to evaluate battery performance and lifespan. By simulating the charge-discharge conditions of batteries under various usage scenarios, our battery aging workshop can assess changes in key parameters such as battery capacity, internal resistance, and voltage, thereby gaining insights into battery performance and service life.



This is a facility dedicated to the production and maintenance of electronic measurement and control equipment. Its functions include, but are not limited to, the manufacturing of electrical measurement probes, instrument calibration, assembly, and testing.

CONTENTS

01	Pressure Washer	05-19
02	Car Vacuum Cleaner	20-37
03	Car Air Pump	38-41
04	Jump Starter	42-43
05	Leaf Blower	44-46
06	Electric Wrench	47-50

01

PRESSURE WASHER

Long-lasting battery life, stable power output, easy operation, powerful stain removal, and efficient peace of mind. This multi-functional device makes every cleaning task easier and more effective.

05-19

VERTICAL PRESSURE WASHER SERIES

SIX
CRAFTSMEN



PRODUCT PARAMETERS

European standard			
Model:	W7-A/W7-B/W7-C	Voltage:	220V~
motor:	7620/7630/7640(series motor)	Frequency:	50HZ
power:	850W/1100W/1350W	Rated flow rate:	4.7L/min
Working pressure:	3.5MPa(507psi)/6.0MPa(870psi)/7.5MPa(1087psi)	Water temperature:	0°C-40°C
Casing Material:	PP Plastic		
American Standard			
Model:	W7-A/W7-B/W7-C	Voltage:	120V~
motor:	7620/7630/7640(series motor)	Frequency:	60HZ
power:	850W/1100W/1350W	Rated flow rate:	4.7L/min
Working pressure:	3.5MPa(507psi)/6.0MPa(870psi)/7.5MPa(1087psi)	Water temperature:	0°C-40°C
Casing Material:	PP Plastic		

STANDARD ACCESSORIES



OPTIONAL ACCESSORIES





NEW



BRAND-NEW AND HIGHLY EFFICIENT CLEANING

PRODUCT PARAMETERS			
Model:	T2	Pump Type:	12mm Single Plunger Pump
Motor Type:	550 copper motor	Water Outlet Pressure:	≥1.2MPa / ≥181 psi
Adjustable Function:	No	Water Flow Rate:	2.7L/min ±10%
Rated Voltage:	18.5V	Battery Capacity:	1500mAh
Rated Power:	140W	Number of Battery Cells:	5 Cells
Current:	≤7.5A	Battery Life:	≈12min
Casing Material:	ABS		

STANDARD ACCESSORIES									
Six in one	Mini quick connect	Filter	5m Water Hose	Foam Cannon	Charging Cable	Coke bottle nozzle	Water pipe hanger	Lithium battery	Color box

OPTIONAL ACCESSORIES					Optional Battery TYPE-C 10W / TYPE-C 45W Fast Charging / DC Optional				
Adjustable Foam Cannon	Plastic Box	Battery Charger	Fast Charging Cable	7.5m Water Hose	10m Water Hose	2.0Ah Battery Capacity Runtime ≈ 16 mins	2.6Ah Battery Capacity Runtime ≈ 21 mins	3.0Ah Battery Capacity Runtime ≈ 24 mins	4.0Ah Battery Capacity Runtime ≈ 32 mins

LITHIUM BATTERY WASHER SERIES

SIX CRAFTSMEN

NEW



BRAND-NEW AND HIGHLY EFFICIENT CLEANING

PRODUCT PARAMETERS			
Model:	T3	Pump Type:	14mm Single Plunger Pump
Motor Type:	3820 Brushless Motor	Water Outlet Pressure:	≥1.35MPa / ≥196 psi
Adjustable Function:	No	Water Flow Rate:	3.0L/min ±10%
Rated Voltage:	18.5V	Battery Capacity:	3000mAh
Rated Power:	205W	Number of Battery Cells:	10 Cells
Current:	≤11A	Battery Life:	≈16.5min
Casing Material:	ABS		

STANDARD ACCESSORIES									
Six in one	quick connect	Filter	5m Water Hose	Adjustable Foam Cannon	Charging Cable	Coke bottle nozzle	Water pipe hanger	Lithium battery	Color box

OPTIONAL ACCESSORIES					Optional Battery TYPE-C 10W / TYPE-C 45W Fast Charging / DC Optional	
Plastic Box	Battery Charger	Fast Charging Cable	7.5m Water Hose	10m Water Hose	4.0Ah Battery Capacity Runtime ≈ 22 mins	5.2Ah Battery Capacity Runtime ≈ 29 mins




BRAND-NEW AND HIGHLY
EFFICIENT CLEANING

PRODUCT PARAMETERS

Model:	T3-A	Pump Type:	14mm Zinc Alloy Large Pump
Motor Type:	3820 Brushless Motor	Water Outlet Pressure:	≥2.2MPa / ≥319 psi
Adjustable Function:	No	Water Flow Rate:	3.6L/min ±10%
Rated Voltage:	18.5V =	Battery Capacity:	3000mAh
Rated Power:	300W	Number of Battery Cells:	10 Cells
Current:	≤16A	Battery Life:	≈11.3min
Casing Material:	ABS		

STANDARD ACCESSORIES



OPTIONAL ACCESSORIES



Optional Battery TYPE-C 10W / TYPE-C 45W Fast Charging / DC Optional

LITHIUM BATTERY WASHER SERIES

SIX
CRAFTSMEN

NEW




BRAND-NEW AND HIGHLY
EFFICIENT CLEANING


PRODUCT PARAMETERS

Model:	T5	Pump Type:	14mm Zinc Alloy Large Pump
Motor Type:	3825 Brushless Motor	Water Outlet Pressure:	≥2.2MPa / ≥319 psi
Adjustable Function:	Yes(3-speed adjustment)	Water Flow Rate:	3.6L/min ±10%
Rated Voltage:	18.5V =	Battery Capacity:	3000mAh
Rated Power:	300W	Number of Battery Cells:	10 Cells
Current:	≤16A	Battery Life:	≈11.3min
Casing Material:	ABS + Overmolding		

STANDARD ACCESSORIES

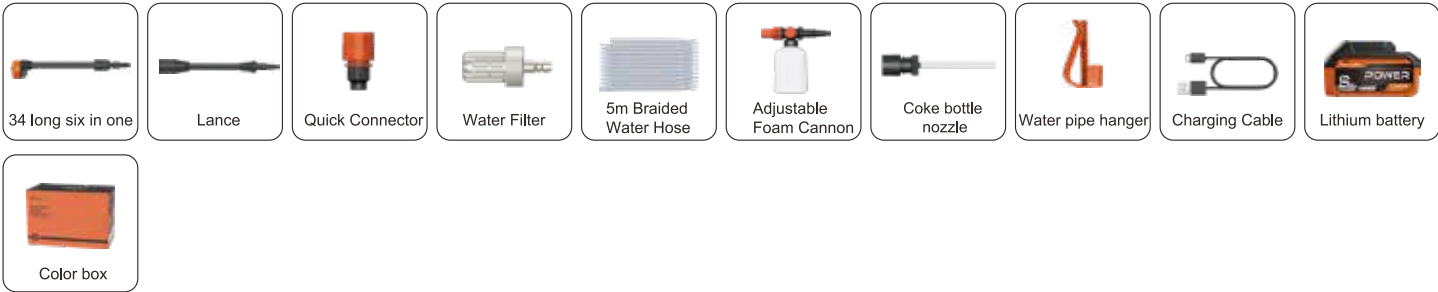

OPTIONAL ACCESSORIES



Optional Battery TYPE-C 10W / TYPE-C 45W Fast Charging / DC Optional



BRAND-NEW AND HIGHLY
EFFICIENT CLEANING

PRODUCT PARAMETERS			
Model:	T6	Pump Type:	10mm Triple Plunger Pump
Motor Type:	3825 Brushless Motor	Water Outlet Pressure:	≥3.0MPa / ≥435 psi
Adjustable Function:	Yes(3-speed adjustment)	Water Flow Rate:	2.85L/min ±10%
Rated Voltage:	18.5V ~	Battery Capacity:	4000mAh
Rated Power:	300W	Number of Battery Cells:	10 Cells
Current:	≤16A	Battery Life:	≈15min
Casing Material:	ABS + Overmolding		

STANDARD ACCESSORIES									
									
									

OPTIONAL ACCESSORIES							Optional Battery TYPE-C 10W / TYPE-C 45W Fast Charging / DC Optional	
								

LITHIUM BATTERY WASHER SERIES

SIX CRAFTSMEN



BRAND-NEW AND HIGHLY
EFFICIENT CLEANING

PRODUCT PARAMETERS			
Model:	T6PLUS	Pump Type:	10mm Triple Plunger Pump
Motor Type:	4830 Brushless Motor	Water Outlet Pressure:	≥5.0MPa / ≥725 psi
Adjustable Function:	Yes(3-speed adjustment)	Water Flow Rate:	3.8L/min ±10%
Rated Voltage:	37V ~	Battery Capacity:	4000mAh
Rated Power:	520W	Number of Battery Cells:	10 cells / 21700 type
Current:	≤14A	Battery Life:	≈17min
Casing Material:	ABS + Overmolding		

STANDARD ACCESSORIES									
									
									

OPTIONAL ACCESSORIES				Optional Battery	
					

LITHIUM BATTERY WASHER SERIES


SIX
CRAFTSMEN



PRODUCT PARAMETERS

Model:	R10
Motor Type:	550 copper motor
Adjustable Function:	No
Rated Voltage:	18.5V $\approx$
Rated Power:	140W
Current:	$\leq 7.5A$
Pump Type:	12mm Single Plunger Pump
Water Outlet Pressure:	$\geq 1.2MPa$ / ≥ 181 psi
Water Flow Rate:	2.7L/min $\pm 10\%$
Battery Capacity:	1500mAh
Number of Battery Cells:	5 Cells
Battery Life:	≈ 12 min
Casing Material:	ABS

STANDARD ACCESSORIES




OPTIONAL ACCESSORIES



PRODUCT PARAMETERS

Model:	R10-A
Motor Type:	3825 Brushless Motor
Adjustable Function:	No
Rated Voltage:	18.5V $\approx$
Rated Power:	185W
Current:	$\leq 10A$
Pump Type:	14mm Single Plunger Pump
Water Outlet Pressure:	$\geq 1.35MPa$ / ≥ 196 psi
Water Flow Rate:	2.9L/min $\pm 10\%$
Battery Capacity:	3000mAh
Number of Battery Cells:	10 Cells
Battery Life:	≈ 18 min
Casing Material:	ABS

STANDARD ACCESSORIES



OPTIONAL ACCESSORIES



LITHIUM BATTERY WASHER SERIES

SIX
CRAFTSMEN



PRODUCT PARAMETERS

Model:	R11
Motor Type:	3820 Brushless Motor
Adjustable Function:	No
Rated Voltage:	18.5V $\approx$
Rated Power:	205W
Current:	$\leq 11A$
Pump Type:	14mm Single Plunger Pump
Water Outlet Pressure:	$\geq 1.35MPa$ / ≥ 196 psi
Water Flow Rate:	3.0L/min $\pm 10\%$
Battery Capacity:	3000mAh
Number of Battery Cells:	10 Cells
Battery Life:	≈ 16.5 min
Casing Material:	ABS



PRODUCT PARAMETERS


Model:	R12
Motor Type:	3820 Brushless Motor
Adjustable Function:	No
Rated Voltage:	18.5V $\approx$
Rated Power:	205W
Current:	$\leq 11A$
Pump Type:	14mm Single Plunger Pump
Water Outlet Pressure:	$\geq 1.35MPa$ / ≥ 196 psi
Water Flow Rate:	3.0L/min $\pm 10\%$
Battery Capacity:	3000mAh
Number of Battery Cells:	10 Cells
Battery Life:	≈ 16.5 min
Casing Material:	ABS




PRODUCT PARAMETERS

Model:	R13
Motor Type:	3820 Brushless Motor
Adjustable Function:	No
Rated Voltage:	18.5V $\approx$
Rated Power:	185W
Current:	$\leq 10A$
Pump Type:	14mm Single Plunger Pump
Water Outlet Pressure:	$\geq 1.35MPa$ / ≥ 196 psi
Water Flow Rate:	2.9L/min $\pm 10\%$
Battery Capacity:	3000mAh
Number of Battery Cells:	10 Cells
Battery Life:	≈ 18 min
Casing Material:	ABS + Overmolding

STANDARD ACCESSORIES



OPTIONAL ACCESSORIES



LITHIUM BATTERY WASHER SERIES

SIX
CRAFTSMEN



PRODUCT PARAMETERS

Model:	R2
Motor Type:	550 Brushed Motor
Adjustable Function:	No
Rated Voltage:	18.5V $\approx$
Rated Power:	110W
Current:	$\leq$ 6A
Pump Type:	12mm Single Plunger Pump
Water Outlet Pressure:	$\geq$ 0.8MPa / $\geq$ 116 psi
Water Flow Rate:	2.4L/min $\pm$ 10%
Battery Capacity:	1300mAh
Number of Battery Cells:	5 Cells
Battery Life:	$\approx$ 13min
Casing Material:	PP Plastic



PRODUCT PARAMETERS


Model:	R3
Motor Type:	550 Brushed Motor
Adjustable Function:	No
Rated Voltage:	18.5V $\approx$
Rated Power:	110W
Current:	$\leq$ 6A
Pump Type:	12mm Single Plunger Pump
Water Outlet Pressure:	$\geq$ 0.8MPa / $\geq$ 116 psi
Water Flow Rate:	2.4L/min $\pm$ 10%
Battery Capacity:	1300mAh
Number of Battery Cells:	5 Cells
Battery Life:	$\approx$ 13min
Casing Material:	PP Plastic



PRODUCT PARAMETERS

Model:	R5
Motor Type:	550 Brushed Motor
Adjustable Function:	No
Rated Voltage:	18.5V $\approx$
Rated Power:	110W
Current:	$\leq$ 6A
Pump Type:	12mm Single Plunger Pump
Water Outlet Pressure:	$\geq$ 0.8MPa / $\geq$ 116 psi
Water Flow Rate:	2.4L/min $\pm$ 10%
Battery Capacity:	1300mAh
Number of Battery Cells:	5 Cells
Battery Life:	$\approx$ 13min
Casing Material:	PP Plastic

STANDARD ACCESSORIES



OPTIONAL ACCESSORIES



LITHIUM BATTERY WASHER SERIES

SIX
CRAFTSMEN



PRODUCT PARAMETERS

Model:	R6
Motor Type:	550 Brushed Motor
Adjustable Function:	No
Rated Voltage:	18.5V $\approx$
Rated Power:	140W
Current:	$\leq$ 7.5A
Pump Type:	12mm Single Plunger Pump
Water Outlet Pressure:	$\geq$ 1.2MPa / $\geq$ 181 psi
Water Flow Rate:	2.7L/min $\pm$ 10%
Battery Capacity:	1500mAh
Number of Battery Cells:	5 Cells
Battery Life:	$\approx$ 12min
Casing Material:	PP Plastic



PRODUCT PARAMETERS


Model:	R7
Motor Type:	550 Brushed Motor
Adjustable Function:	No
Rated Voltage:	18.5V $\approx$
Rated Power:	140W
Current:	$\leq$ 7.5A
Pump Type:	12mm Single Plunger Pump
Water Outlet Pressure:	$\geq$ 1.2MPa / $\geq$ 181 psi
Water Flow Rate:	2.7L/min $\pm$ 10%
Battery Capacity:	1500mAh
Number of Battery Cells:	5 Cells
Battery Life:	$\approx$ 12min
Casing Material:	ABS



PRODUCT PARAMETERS

Model:	R8
Motor Type:	550 Brushed Motor
Adjustable Function:	No
Rated Voltage:	18.5V $\approx$
Rated Power:	140W
Current:	$\leq$ 7.5A
Pump Type:	12mm Single Plunger Pump
Water Outlet Pressure:	$\geq$ 1.2MPa / $\geq$ 181 psi
Water Flow Rate:	2.7L/min $\pm$ 10%
Battery Capacity:	1500mAh
Number of Battery Cells:	5 Cells
Battery Life:	$\approx$ 12min
Casing Material:	ABS

STANDARD ACCESSORIES



OPTIONAL ACCESSORIES



LITHIUM BATTERY WASHER SERIES

SIX
CRAFTSMEN



PRODUCT PARAMETERS

Model:	R9
Motor Type:	550 Brushed Motor
Adjustable Function:	No
Rated Voltage:	18.5V $\approx$
Rated Power:	140W
Current:	$\leq 7.5A$
Pump Type:	12mm Single Plunger Pump
Water Outlet Pressure:	$\geq 1.2MPa$ / ≥ 181 psi
Water Flow Rate:	2.7L/min $\pm 10\%$
Battery Capacity:	1500mAh
Number of Battery Cells:	5 Cells
Battery Life:	≈ 12 min
Casing Material:	ABS



PRODUCT PARAMETERS


Model:	R18
Motor Type:	550 Brushed Motor
Adjustable Function:	No
Rated Voltage:	18.5V $\approx$
Rated Power:	140W
Current:	$\leq 7.5A$
Pump Type:	12mm Single Plunger Pump
Water Outlet Pressure:	$\geq 1.2MPa$ / ≥ 181 psi
Water Flow Rate:	2.7L/min $\pm 10\%$
Battery Capacity:	1500mAh
Number of Battery Cells:	5 Cells
Battery Life:	≈ 12 min
Casing Material:	ABS + Overmolding



PRODUCT PARAMETERS

Model:	R19
Motor Type:	550 Brushed Motor
Adjustable Function:	No
Rated Voltage:	18.5V $\approx$
Rated Power:	140W
Current:	$\leq 7.5A$
Pump Type:	12mm Single Plunger Pump
Water Outlet Pressure:	$\geq 1.2MPa$ / ≥ 181 psi
Water Flow Rate:	2.7L/min $\pm 10\%$
Battery Capacity:	1500mAh
Number of Battery Cells:	5 Cells
Battery Life:	≈ 12 min
Casing Material:	Nylon + Overmolding

STANDARD ACCESSORIES



OPTIONAL ACCESSORIES



Optional Battery TYPE-C 10W / TYPE-C 45W Fast Charging / DC Optional

LITHIUM BATTERY WASHER SERIES

SIX
CRAFTSMEN



PRODUCT PARAMETERS

Model:	R17-A
Motor Type:	550 Brushed Motor
Adjustable Function:	No
Rated Voltage:	18.5V $\approx$
Rated Power:	140W
Current:	$\leq 7.5A$
Pump Type:	12mm Single Plunger Pump
Water Outlet Pressure:	$\geq 1.2MPa$ / ≥ 181 psi
Water Flow Rate:	2.7L/min $\pm 10\%$
Battery Capacity:	1500mAh
Number of Battery Cells:	5 Cells
Battery Life:	≈ 12 min
Casing Material:	ABS + Overmolding



PRODUCT PARAMETERS


Model:	R17-B
Motor Type:	550 Brushed Motor
Adjustable Function:	No
Rated Voltage:	18.5V $\approx$
Rated Power:	140W
Current:	$\leq 7.5A$
Pump Type:	12mm Single Plunger Pump
Water Outlet Pressure:	$\geq 1.2MPa$ / ≥ 181 psi
Water Flow Rate:	2.7L/min $\pm 10\%$
Battery Capacity:	1500mAh
Number of Battery Cells:	5 Cells
Battery Life:	≈ 12 min
Casing Material:	ABS + Overmolding




PRODUCT PARAMETERS

Model:	R17-C
Motor Type:	3820 Brushless Motor
Adjustable Function:	No
Rated Voltage:	18.5V $\approx$
Rated Power:	185W
Current:	$\leq 10A$
Pump Type:	14mm Single Plunger Pump
Water Outlet Pressure:	$\geq 1.35MPa$ / ≥ 196 psi
Water Flow Rate:	2.9L/min $\pm 10\%$
Battery Capacity:	3000mAh
Number of Battery Cells:	10 Cells
Battery Life:	≈ 18 min
Casing Material:	ABS + Overmolding

STANDARD ACCESSORIES



OPTIONAL ACCESSORIES



Optional Battery TYPE-C 10W / TYPE-C 45W Fast Charging / DC Optional

LITHIUM BATTERY WASHER SERIES



PRODUCT PARAMETERS


Model:	R15	Pump Type:	14mm Single Plunger Pump
Motor Type:	3820 Brushless Motor	Water Outlet Pressure:	≥1.35MPa / ≥196 psi
Adjustable Function:	Yes	Water Flow Rate:	3.0L/min ±10%
Rated Voltage:	18.5V $\equiv$	Battery Capacity:	3000mAh
Rated Power:	205W	Number of Battery Cells:	10 cells
Current:	≤11A	Battery Life:	≈16.5min
Casing Material:	ABS + Overmolding		




PRODUCT PARAMETERS

Model:	R16	Pump Type:	10mm Triple Plunger Pump
Motor Type:	3825 Brushless Motor	Water Outlet Pressure:	≥3.0MPa / ≥435 psi
Adjustable Function:	Yes	Water Flow Rate:	2.85L/min ±10%
Rated Voltage:	18.5V $\equiv$	Battery Capacity:	4000mAh * 2
Rated Power:	300W	Number of Battery Cells:	10 cells * 2
Current:	≤16A	Battery Life:	≈15min * 2
Casing Material:	ABS + Overmolding		

STANDARD ACCESSORIES

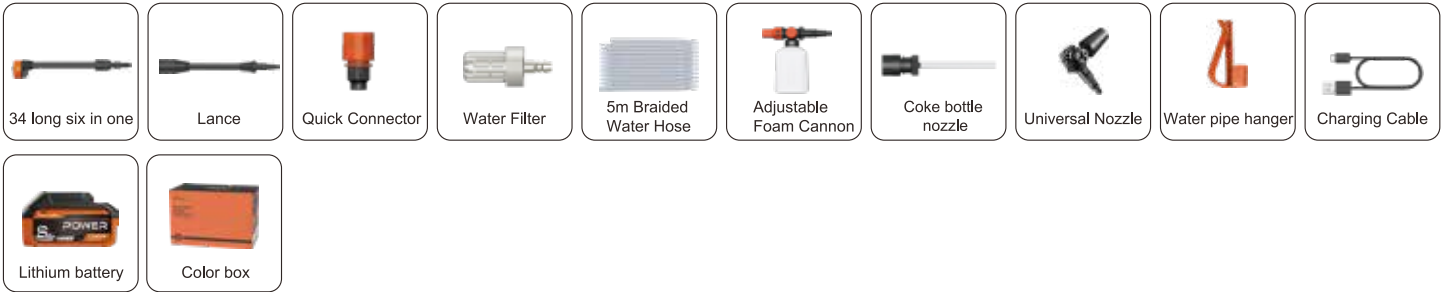

OPTIONAL ACCESSORIES

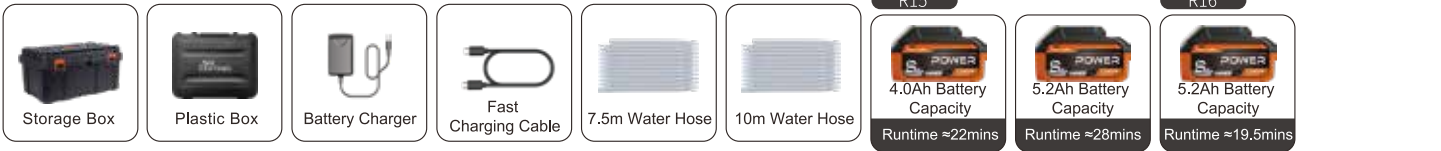

02

CAR VACUUM
CLEANER

Compact and portable with strong suction power, the cordless design offers unrestricted use. It works for both car and home, and is easy to store, keeping your car clean and tidy at all times for a more comfortable journey.



H3



H5


PRODUCT PARAMETERS

Model:	H3/H5	Vacuum Degree:	≥5kPa
Motor Type:	38 Brushed Motor	Battery Capacity:	1500mAh
Dust Cup Capacity:	100ml/180ml	Number of Battery Cells:	2 cells
Rated Voltage:	7.4V	Battery Life:	≈13min
Rated Power:	55W	Charging Interface:	Type-C
Current:	≤7.0A	Casing Material:	ABS

STANDARD ACCESSORIES



OPTIONAL ACCESSORIES



Optional Battery



CAR VACUUM CLEANER SERIES

SIX CRAFTSMEN



PRODUCT PARAMETERS

Model:	H6-A
Motor Type:	38 Brushed Motor
Dust Cup Capacity:	180ml
Rated Voltage:	7.4V
Rated Power:	60W
Current:	≤7.5A
Vacuum Degree:	≥6kPa
Battery Capacity:	1500mAh
Number of Battery Cells:	2 Cells
Battery Life:	≈12min
Charging Interface:	Type-C
Casing Material:	ABS


STANDARD ACCESSORIES




OPTIONAL ACCESSORIES



OPTIONAL ACCESSORIES



Optional Battery




PRODUCT PARAMETERS

Model:	H6-B
Motor Type:	H45 Brushless Motor
Dust Cup Capacity:	180ml
Rated Voltage:	7.4V
Rated Power:	70W
Current:	≤9.0A
Vacuum Degree:	≥10.5kPa
Battery Capacity:	2000mAh
Number of Battery Cells:	2 Cells
Battery Life:	≈13min
Charging Interface:	Type-C
Casing Material:	ABS


STANDARD ACCESSORIES



OPTIONAL ACCESSORIES



Optional Battery



CAR VACUUM CLEANER SERIES

SIX
CRAFTSMEN




PRODUCT PARAMETERS

Model:	H7-A
Motor Type:	38 Brushed Motor
Dust Cup Capacity:	180ml
Rated Voltage:	7.4V $\approx$
Rated Power:	60W
Current:	$\leq$ 7.5A
Vacuum Degree:	$\geq$ 6kPa
Battery Capacity:	1500mAh
Number of Battery Cells:	2 Cells
Battery Life:	$\approx$ 12min
Charging Interface:	Type-C
Casing Material:	ABS

STANDARD ACCESSORIES



OPTIONAL ACCESSORIES

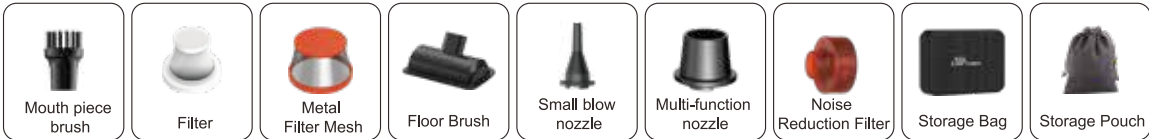

Optional Battery



PRODUCT PARAMETERS

Model:	H7-B
Motor Type:	H45 Brushless Motor
Dust Cup Capacity:	180ml
Rated Voltage:	7.4V $\approx$
Rated Power:	70W
Current:	$\leq$ 9.0A
Vacuum Degree:	$\geq$ 10.5kPa
Battery Capacity:	2000mAh
Number of Battery Cells:	2 Cells
Battery Life:	$\approx$ 13min
Charging Interface:	Type-C
Casing Material:	ABS

STANDARD ACCESSORIES



OPTIONAL ACCESSORIES



Optional Battery



CAR VACUUM CLEANER SERIES

SIX
CRAFTSMEN



PRODUCT PARAMETERS

Model:	H8-A
Motor Type:	38 Brushed Motor
Dust Cup Capacity:	180ml
Rated Voltage:	7.4V $\approx$
Rated Power:	60W
Current:	$\leq$ 7.5A
Vacuum Degree:	$\geq$ 6kPa
Battery Capacity:	1500mAh
Number of Battery Cells:	2 Cells
Battery Life:	$\approx$ 12min
Charging Interface:	Type-C
Casing Material:	ABS



PRODUCT PARAMETERS

Model:	H8-B
Motor Type:	H45 Brushless Motor
Dust Cup Capacity:	180ml
Rated Voltage:	7.4V $\approx$
Rated Power:	70W
Current:	$\leq$ 9.0A
Vacuum Degree:	$\geq$ 10.5kPa
Battery Capacity:	2000mAh
Number of Battery Cells:	2 Cells
Battery Life:	$\approx$ 13min
Charging Interface:	Type-C
Casing Material:	ABS



PRODUCT PARAMETERS

Model:	H9
Motor Type:	H45 Brushless Motor
Dust Cup Capacity:	180ml
Rated Voltage:	7.4V $\approx$
Rated Power:	70W
Current:	$\leq$ 9.0A
Vacuum Degree:	$\geq$ 10.5kPa
Battery Capacity:	2000mAh
Number of Battery Cells:	2 Cells
Battery Life:	$\approx$ 13min
Charging Interface:	Type-C
Casing Material:	ABS

STANDARD ACCESSORIES



OPTIONAL ACCESSORIES



Optional Battery (H8-A)



Optional Battery (H8-B/H9)





Battery Indicator
3-Speed Adjustment




PRODUCT PARAMETERS

Model:	H9-A	Vacuum Degree:	Low $\geq 12\text{KPa}$ / Medium $\geq 15.2\text{KPa}$ / High $\geq 21\text{KPa}$
Motor Type:	45 Brushless Motor	Battery Capacity:	2000mAh
Dust Cup Capacity:	200ml	Number of Battery Cells:	4 cells
Rated Voltage:	14.8V	Battery Life:	Low $\leq 31\text{min}$ / Medium $\leq 23\text{min}$ / High $\leq 17\text{min}$
Rated Power:	105W	Battery Charging Time:	1.2 hours
Current:	Low $\leq 3.9\text{A}$ / Medium $\leq 5.3\text{A}$ / High $\leq 7\text{A}$	Casing Material:	ABS
Charging Input:	35W(max)		

STANDARD ACCESSORIES



OPTIONAL ACCESSORIES



Optional Battery



Battery Indicator
3-Speed Adjustment



PRODUCT PARAMETERS

Model:	H9pro	Vacuum Degree:	Low $\geq 12\text{KPa}$ / Medium $\geq 15.2\text{KPa}$ / High $\geq 21\text{KPa}$
Motor Type:	45 Brushless Motor	Battery Capacity:	2000mAh
Dust Cup Capacity:	200ml	Number of Battery Cells:	4 cells
Rated Voltage:	14.8V	Battery Life:	Low $\leq 31\text{min}$ / Medium $\leq 23\text{min}$ / High $\leq 17\text{min}$
Rated Power:	105W	Battery Charging Time:	1.2 hours
Current:	Low $\leq 3.9\text{A}$ / Medium $\leq 5.3\text{A}$ / High $\leq 7\text{A}$	Casing Material:	ABS
Charging Input:	35W(max)		

STANDARD ACCESSORIES



OPTIONAL ACCESSORIES



Optional Battery






PRODUCT PARAMETERS

Model:	H10-A	Vacuum Degree:	≥6kPa
Motor Type:	38 Brushed Motor	Battery Capacity:	1500mAh
Dust Cup Capacity:	180ml	Battery Cells:	2
Rated Voltage:	7.4V	Battery Life:	≈12min
Rated Power:	60W	Charging Interface:	Type-C
Current:	≤7.5A	Casing Material:	ABS


PRODUCT PARAMETERS

Model:	H10-B	Vacuum Degree:	≥10.5kPa
Motor Type:	H45 Brushless Motor	Battery Capacity:	2000mAh
Dust Cup Capacity:	180ml	Battery Cells:	2
Rated Voltage:	7.4V	Battery Life:	≈13min
Rated Power:	70W	Charging Interface:	Type-C
Current:	≤9.0A	Casing Material:	ABS

STANDARD ACCESSORIES



Optional Battery (H10-A)

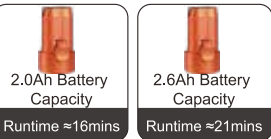

OPTIONAL ACCESSORIES



Optional Battery (H10-B)



CAR VACUUM CLEANER SERIES

SIX
CRAFTSMEN




PRODUCT PARAMETERS

Model:	H11-A	Vacuum Degree:	≥7kPa
Motor Type:	550 Brushed Motor	Battery Capacity:	1500mAh
Dust Cup Capacity:	180ml	Battery Cells:	5
Rated Voltage:	18.5V	Battery Life:	≈14min
Rated Power:	120W	Charging Interface:	Type-C
Current:	≤6.5A	Casing Material:	ABS


PRODUCT PARAMETERS

Model:	H11-B	Vacuum Degree:	≥18kPa
Motor Type:	H45 Brushless Motor	Battery Capacity:	2000mAh
Dust Cup Capacity:	180ml	Battery Cells:	5
Rated Voltage:	18.5V	Battery Life:	≈18.5min
Rated Power:	120W	Charging Interface:	Type-C
Current:	≤6.5A	Casing Material:	ABS

STANDARD ACCESSORIES



OPTIONAL ACCESSORIES

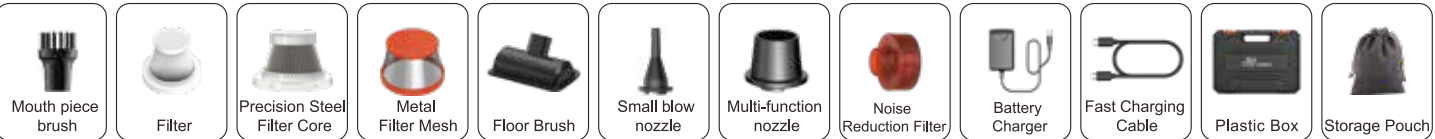

Optional Battery TYPE-C 10W / TYPE-C 45W Fast Charging / DC Optional



CAR VACUUM CLEANER SERIES

SIX
CRAFTSMEN




PRODUCT PARAMETERS

Model:	H12-A	Vacuum Degree:	≥7kPa
Motor Type:	550 Brushed Motor	Battery Capacity:	1500mAh
Dust Cup Capacity:	180ml	Battery Cells:	5
Rated Voltage:	18.5V	Battery Life:	≈14min
Rated Power:	120W	Charging Interface:	Type-C
Current:	≤6.5A	Casing Material:	ABS


PRODUCT PARAMETERS

Model:	H12-B	Vacuum Degree:	≥18kPa
Motor Type:	H45 Brushless Motor	Battery Capacity:	2000mAh
Dust Cup Capacity:	180ml	Battery Cells:	5
Rated Voltage:	18.5V	Battery Life:	≈18.5min
Rated Power:	120W	Charging Interface:	Type-C
Current:	≤6.5A	Casing Material:	ABS

STANDARD ACCESSORIES



OPTIONAL ACCESSORIES



Optional Battery

TYPE-C 10W / TYPE-C 45W Fast Charging / DC Optional



CAR VACUUM CLEANER SERIES

SIX
CRAFTSMEN




PRODUCT PARAMETERS

Model:	H15-A	Vacuum Degree:	≥7kPa
Motor Type:	550 Brushed Motor	Battery Capacity:	1500mAh
Dust Cup Capacity:	180ml	Battery Cells:	5
Rated Voltage:	18.5V	Battery Life:	≈14min
Rated Power:	120W	Charging Interface:	Type-C
Current:	≤6.5A	Casing Material:	ABS


PRODUCT PARAMETERS

Model:	H15-B	Vacuum Degree:	≥18kPa
Motor Type:	H45 Brushless Motor	Battery Capacity:	2000mAh
Dust Cup Capacity:	180ml	Battery Cells:	5
Rated Voltage:	18.5V	Battery Life:	≈18.5min
Rated Power:	120W	Charging Interface:	Type-C
Current:	≤6.5A	Casing Material:	ABS

STANDARD ACCESSORIES



OPTIONAL ACCESSORIES



Optional Battery

TYPE-C 10W / TYPE-C 45W Fast Charging / DC Optional



CAR VACUUM CLEANER SERIES

SIX
CRAFTSMEN




PRODUCT PARAMETERS

Model:	H16-A	Vacuum Degree:	≥7kPa
Motor Type:	550 Brushed Motor	Battery Capacity:	1500mAh
Dust Cup Capacity:	180ml	Battery Cells:	5
Rated Voltage:	18.5V	Battery Life:	≈14min
Rated Power:	120W	Charging Interface:	Type-C
Current:	≤6.5A	Casing Material:	ABS


PRODUCT PARAMETERS

Model:	H16-B	Vacuum Degree:	≥18kPa
Motor Type:	H45 Brushless Motor	Battery Capacity:	2000mAh
Dust Cup Capacity:	180ml	Battery Cells:	5
Rated Voltage:	18.5V	Battery Life:	≈18.5min
Rated Power:	120W	Charging Interface:	Type-C
Current:	≤6.5A	Casing Material:	ABS

STANDARD ACCESSORIES



OPTIONAL ACCESSORIES



Optional Battery

TYPE-C 10W / TYPE-C 45W Fast Charging / DC Optional



CAR VACUUM CLEANER SERIES

SIX
CRAFTSMEN




PRODUCT PARAMETERS

Model:	H17-A	Vacuum Degree:	≥7kPa
Motor Type:	550 Brushed Motor	Battery Capacity:	1500mAh
Dust Cup Capacity:	180ml	Battery Cells:	5
Rated Voltage:	18.5V	Battery Life:	≈14min
Rated Power:	120W	Charging Interface:	Type-C
Current:	≤6.5A		
Casing Material:	ABS + Overmolding		


PRODUCT PARAMETERS

Model:	H17-B	Vacuum Degree:	≥18kPa
Motor Type:	H45 Brushless Motor	Battery Capacity:	2000mAh
Dust Cup Capacity:	180ml	Battery Cells:	5
Rated Voltage:	18.5V	Battery Life:	≈18.5min
Rated Power:	120W	Charging Interface:	Type-C
Current:	≤6.5A		
Casing Material:	ABS + Overmolding		

STANDARD ACCESSORIES



OPTIONAL ACCESSORIES



Optional Battery

TYPE-C 10W / TYPE-C 45W Fast Charging / DC Optional






PRODUCT PARAMETERS

Model:	H18-A	Vacuum Degree:	≥7kPa
Motor Type:	550 Brushed Motor	Battery Capacity:	1500mAh
Dust Cup Capacity:	180ml	Battery Cells:	5
Rated Voltage:	18.5V	Battery Life:	≈14min
Rated Power:	120W	Charging Interface:	Type-C
Current:	≤6.5A		
Casing Material:	ABS + Overmolding		


PRODUCT PARAMETERS

Model:	H18-B	Vacuum Degree:	≥18kPa
Motor Type:	H45 Brushless Motor	Battery Capacity:	2000mAh
Dust Cup Capacity:	180ml	Battery Cells:	5
Rated Voltage:	18.5V	Battery Life:	≈18.5min
Rated Power:	120W	Charging Interface:	Type-C
Current:	≤6.5A		
Casing Material:	ABS + Overmolding		

STANDARD ACCESSORIES



OPTIONAL ACCESSORIES

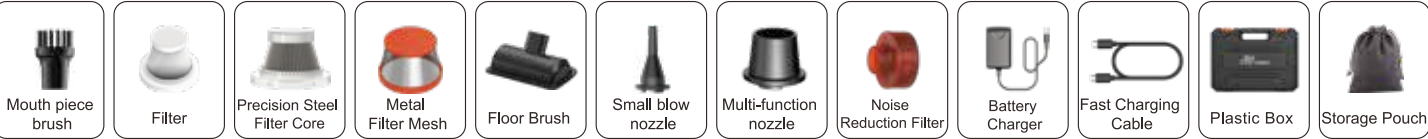

Optional Battery


TYPE-C 10W / TYPE-C 45W Fast Charging / DC Optional




PRODUCT PARAMETERS

Model:	H20plus	Charging Input:	5V --- 2A
Motor Type:	H55 Brushless Motor	Current:	Low ≤6.5A / Medium ≤9.5A / High ≤12.5A
Dust Cup Capacity:	200ml	Vacuum Degree:	Low ≥17KPa / Medium ≥22KPa / High ≥25KPa
Rated Voltage:	18.5V	Battery Capacity:	2000mAh
Rated Power:	235W	Battery Life:	Low ≤18.5min / Medium ≤13min / High ≤10min
Charging Interface:	Type-C	Casing Material:	ABS + Overmolding

STANDARD ACCESSORIES



OPTIONAL ACCESSORIES

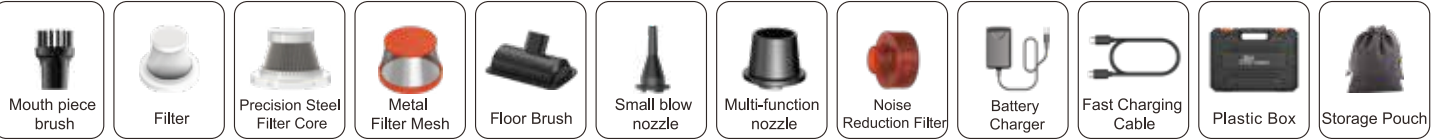

Optional Battery

TYPE-C 10W / TYPE-C 45W Fast Charging / DC Optional







PRODUCT PARAMETERS

Model:	H21plus	Charging Input:	5V = 2A
Motor Type:	H55 Brushless Motor	Current:	Low ≤6.5A / Medium ≤9.5A / High ≤12.5A
Dust Cup Capacity:	200ml	Vacuum Degree:	Low ≥17KPa / Medium ≥22KPa / High ≥25KPa
Rated Voltage:	18.5V =	Battery Capacity:	2000mAh
Rated Power:	235W	Battery Life:	Low ≤18.5min / Medium ≤13min / High ≤10min
Charging Interface:	Type-C	Casing Material:	ABS + Overmolding

STANDARD ACCESSORIES



OPTIONAL ACCESSORIES



Optional Battery

TYPE-C 10W / TYPE-C 45W Fast Charging / DC Optional



Battery Indicator


3-Speed Adjustment



PRODUCT PARAMETERS

Model:	H22plus	Charging Input:	5V = 2A
Motor Type:	H55 Brushless Motor	Current:	Low ≤6.5A / Medium ≤9.5A / High ≤12.5A
Dust Cup Capacity:	200ml	Vacuum Degree:	Low ≥17KPa / Medium ≥22KPa / High ≥25KPa
Rated Voltage:	18.5V =	Battery Capacity:	2600mAh
Rated Power:	235W	Battery Life:	Low ≤24min / Medium ≤16.5min / High ≤12.5min
Charging Interface:	Type-C	Casing Material:	Nylon + Overmolding

STANDARD ACCESSORIES




OPTIONAL ACCESSORIES



Optional Battery

TYPE-C 10W / TYPE-C 45W Fast Charging / DC Optional






Battery Indicator
3-Speed Adjustment


PRODUCT PARAMETERS

Model:	H23plus	Charging Input:	5V = 2A
Motor Type:	H55 Brushless Motor	Current:	Low ≤6.5A / Medium ≤9.5A / High ≤12.5A
Dust Cup Capacity:	200ml	Vacuum Degree:	Low ≥17KPa / Medium ≥22KPa / High ≥25KPa
Rated Voltage:	18.5V =	Battery Capacity:	2600mAh
Rated Power:	235W	Battery Life:	Low ≤24min / Medium ≤16.5min / High ≤12.5min
Charging Interface:	Type-C	Casing Material:	Nylon + Overmolding

STANDARD ACCESSORIES



OPTIONAL ACCESSORIES

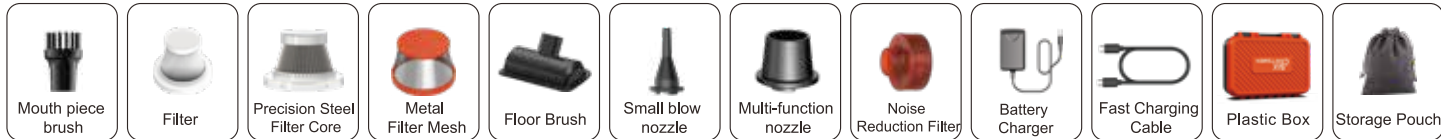

Optional Battery TYPE-C 10W / TYPE-C 45W Fast Charging / DC Optional



03

CAR AIR PUMP

Powerful motor for fast inflation, precise tire pressure monitoring, and one-button operation to solve all inflation issues. Long battery life, stable operation, an essential emergency item for safer travels.



PRODUCT PARAMETERS			
Model:	F3/F3-A/F3-B	Motor Type:	Copper Wire
Rated Power:	60W	Inflation Time for 195/60R14 Tire:	7-8min
Rated Voltage:	11.1V ==	Inflation Time for Motorcycle Tire:	3min
Charging Input:	5V == 2A	Inflation Time for Bicycle Tire:	2min
Pressure Range:	0-150psi	Inflation Time for Basketball:	1min
Battery Capacity:	1500mAh	Product Dimensions:	65mm * 43mm * 160mm
Range:	2 pieces of 225/55R16 tires	Package Dimensions:	105mm * 50mm * 185mm
USB Output:	5V == 2A	Casing Material:	ABS


STANDARD ACCESSORIES



OPTIONAL ACCESSORIES



Optional Battery

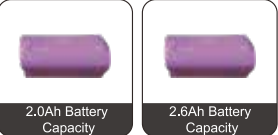

PRODUCT PARAMETERS			
Model:	F5	Motor Type:	Copper Wire
Rated Power:	120W MAX	Inflation Time for 195/60R14 Tire:	4-5min
Rated Voltage:	18.5V ==	Inflation Time for Motorcycle Tire:	2-3min
Charging Input:	5V == 2A	Inflation Time for Bicycle Tire:	0.5-1min
Pressure Range:	0-150psi	Inflation Time for Basketball:	0.2-1min
Battery Capacity:	1500mAh	Product Dimensions:	275mm * 86mm * 180mm
Range:	3 pieces of 225/55R16 tires	Package Dimensions:	280mm * 240mm * 105mm
Casing Material:	ABS		

STANDARD ACCESSORIES



OPTIONAL ACCESSORIES



Optional Battery TYPE-C 10W / TYPE-C 45W Fast Charging / DC Optional






PRODUCT PARAMETERS

Model:	F6	Motor Type:	Copper Wire
Rated Power:	120W MAX	Inflation Time for 195/60R14 Tire:	4-5min
Rated Voltage:	18.5V==	Inflation Time for Motorcycle Tire:	2-3min
Charging Input:	5V==2A	Inflation Time for Bicycle Tire:	0.5-1min
Pressure Range:	0-150psi	Inflation Time for Basketball:	0.2-1min
Battery Capacity:	1500mAh	Product Dimensions:	275mm * 86mm * 180mm
Range:	3 pieces of 225/55R16 tires	Package Dimensions:	280mm * 240mm * 105mm
Casing Material:	ABS + Overmolding		

STANDARD ACCESSORIES



OPTIONAL ACCESSORIES

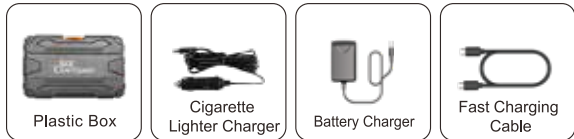

Optional Battery TYPE-C 10W / TYPE-C 45W Fast Charging / DC Optional



04

PORTABLE
JUMP STARTER

Powerful and compact, it easily solves the problem of a dead car battery and can also be used as a portable power bank.

With a compact and easy-to-store design, it is multi-functional and highly practical, making it an essential tool for vehicle emergencies and long-distance travel.



G9-A



G9-C




G9-D

PRODUCT PARAMETERS

Model:	G9-A/G9-C/G9-D	Charging Time:	4.5h
Motor Type:	Brushed Motor	Air Pump Diameter:	22mm
Rated Air Pump Voltage:	DC 14.8V (Excluding Jump Starter)	Rated Air Pump Power:	70W (Excluding Jump Starter)
Rated Air Pump Current:	5A (Excluding Jump Starter)	Inflation Pressure:	120PSI (MAX)
Inflation Time (195/65 R15 Tire, 0-35psi):	≈6-7 min	Inflation Time (Motorcycle Tire, 0-34psi):	≈2-3.5 min
Inflation Time (700C Mountain Bike Tire, 0-120psi):	≈1-2.5 min	Inflation Time (Basketball, 0-8psi):	≈1-2 min
Jump Start Voltage:	12V	Jump Start Current:	180A (Peak Discharge)
Polymer Lithium Battery:	6000mAh	USB Output:	5V
Casing Material:	ABS		2A


STANDARD ACCESSORIES

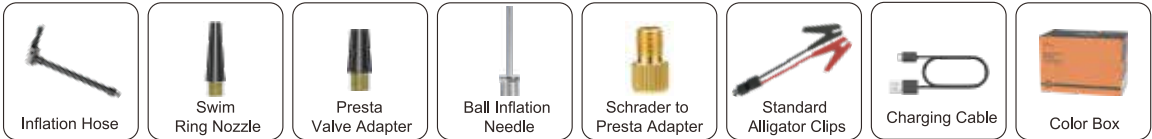

OPTIONAL ACCESSORIES



Optional Battery

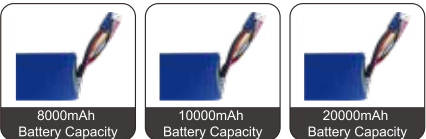

05
AIR BLOWER

Equipped with a high-power motor and adjustable speed settings, it meets the needs of various scenarios. This multi-functional tool is efficient and labor-saving, making it a reliable assistant for cleaning and dust removal.

HIGH-POWER JET BLOWER SERIES

SIX
CRAFTSMEN



V0

V3/V5

STANDARD ACCESSORIES



OPTIONAL ACCESSORIES



Optional Battery



PRODUCT PARAMETERS

Model:	V0	Rated Voltage:	18.5V $\equiv$
Casing Material:	PP Plastic	Motor Type:	555 Brushed Motor
Battery Capacity:	3.0Ah	Net Weight/Gross Weight:	438g/1950g
Rated Power/Current:	260W/13.8A	Product Dimensions:	230mm×160mm×85mm
Air Volume:	≥150m³/h	Charging Input:	21V $\equiv$ 0.5A
Wind Speed	≥44m/s	Battery Life:	≈13 min
Wind Pressure:	≥1200Pa		

PRODUCT PARAMETERS

Model:	V3	Rated Voltage:	18.5V $\equiv$
Casing Material:	Nylon + Overmolding	Motor Type:	3815 Brushless Motor
Battery Capacity:	3.0Ah	Net Weight/Gross Weight:	438g/1950g
Rated Power/Current:	560W/30A	Product Dimensions:	230mm×160mm×85mm
Air Volume:	≥160m³/h	Charging Input:	21V $\equiv$ 0.5A
Wind Speed	≥45m/s	Battery Life:	≈6min (max gear)
Wind Pressure:	≥1300Pa	Speed control:	Stepless speed regulation

PRODUCT PARAMETERS

Model:	V5	Rated Voltage:	18.5V $\equiv$
Casing Material:	Nylon + Overmolding	Motor Type:	29 Duct Brushless Motor
Battery Capacity:	3.0Ah	Net Weight/Gross Weight:	438g/1950g
Rated Power/Current:	780W/42A	Product Dimensions:	230mm×160mm×85mm
Air Volume:	≥190m³/h	Charging Input:	21V $\equiv$ 0.5A
Wind Speed	≥53m/s	Battery Life:	≈4min (max gear)
Wind Pressure:	≥1730Pa	Speed control:	Stepless speed regulation



STANDARD ACCESSORIES



OPTIONAL ACCESSORIES



Optional Battery



PRODUCT PARAMETERS

Model:	V2	Rated Voltage:	18.5V $\equiv$
Casing Material:	ABS	Motor Type:	28Channel Brushless Motor
Battery Capacity:	2.6Ah	Net Weight/Gross Weight:	260g/1040g
Rated Power/Current:	215W/11.6A	Product Dimensions:	212mm×68mm×203mm
Air Volume:	≥110m³/h	Charging Input:	21V $\equiv$ 0.5A
Wind Speed	≥29m/s	Battery Life:	≈14min
Wind Pressure:	≥550Pa	Speed control:	Stepless speed regulation

06

ELECTRIC WRENCH /ELECTRIC GREASE GUN

Powerful motor with multi-speed settings to meet various installation and disassembly needs. Long-lasting battery life, stable operation, high efficiency and labor-saving, greatly improving work efficiency.


47-50




STANDARD ACCESSORIES



OPTIONAL ACCESSORIES



Optional Battery

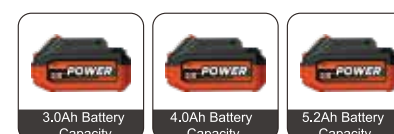

PRODUCT PARAMETERS

Model:	D3	No-Load Speed:	0-2000rpm / 0-2400rpm
Rated Voltage:	18.5V	Impact Frequency:	0-2600bpm / 0-3200bpm
Casing Material:	Nylon + Overmolding	Chuck Type:	1/2" Square Drive
Motor Type:	Brushless Motor	Max. Torque:	220N.m / 350N.m
Battery Capacity:	2.6Ah	Standard Bolt:	M10-M20
Charging Input:	21V 0.5A	Speed Settings:	2 Gears

ELECTRIC WRENCH SERIES

SIX
CRAFTSMEN



STANDARD ACCESSORIES



OPTIONAL ACCESSORIES



Optional Battery



PRODUCT PARAMETERS

Model:	D5	No-Load Speed:	0-1400rpm / 0-1900rpm/ 0-2400rpm
Rated Voltage:	18.5V $\equiv$	Impact Frequency:	0-1700bpm / 0-2400bpm/ 0-3000bpm
Casing Material:	Nylon + Overmolding	Chuck Type:	1/2" Square Drive
Motor Type:	Brushless Motor	Max. Torque:	300N.m / 400N.m / 500N.m
Battery Capacity:	2.6Ah	Standard Bolt:	M10-M20
Charging Input:	21V $\equiv$ 0.5A	Speed Settings:	3 Gears



STANDARD ACCESSORIES



OPTIONAL ACCESSORIES



Optional Battery



PRODUCT PARAMETERS

Model:	D8	No-Load Speed:	0-1500rpm / 0-1900rpm/ 0-2300rpm
Rated Voltage:	18.5V $\equiv$	Impact Frequency:	0-1800bpm / 0-2100bpm/ 0-2600bpm
Casing Material:	Nylon + Overmolding	Chuck Type:	1/2" Square Drive
Motor Type:	Brushless Motor	Max. Torque:	400N.m / 600N.m / 850N.m
Battery Capacity:	2.6Ah	Standard Bolt:	M10-M24
Charging Input:	21V $\equiv$ 0.5A	Speed Settings:	3 Gears

ELECTRIC GREASE GUN SERIES

SIX
CRAFTSMEN



PRODUCT PARAMETERS

Model:	DH3	Overall Length:	420mm
Rated Voltage:	18.5V $\equiv$	Oil Output Pressure:	8000psi
Casing Material:	Nylon + Overmolding	Oil Output Rate:	- High Gear: $\geq$ 120g/min - Low Gear: $\geq$ 80g/min
Motor Type:	Brushless Motor	Oil Tank Capacity:	600CC
Battery Capacity:	2.6Ah		
Tube Diameter:	63mm		

OPTIONAL ACCESSORIES



Optional Battery TYPE-C 10W / TYPE-C 45W Fast Charging / DC Optional

